Electronic Engineering

in **UHF** as in so many other ways

Plessey

serves the electronics industry

- Plessey Butterfly Tuners
- Plessey Potentiometers
- Plessey Co-axial Relays
- Plessey Tuning Units
- Plessey Tubular Trimmers
- Plessey Resistors
- Plessey Materials

'First Preference' range of 0·3 amp. heater current type TV valves

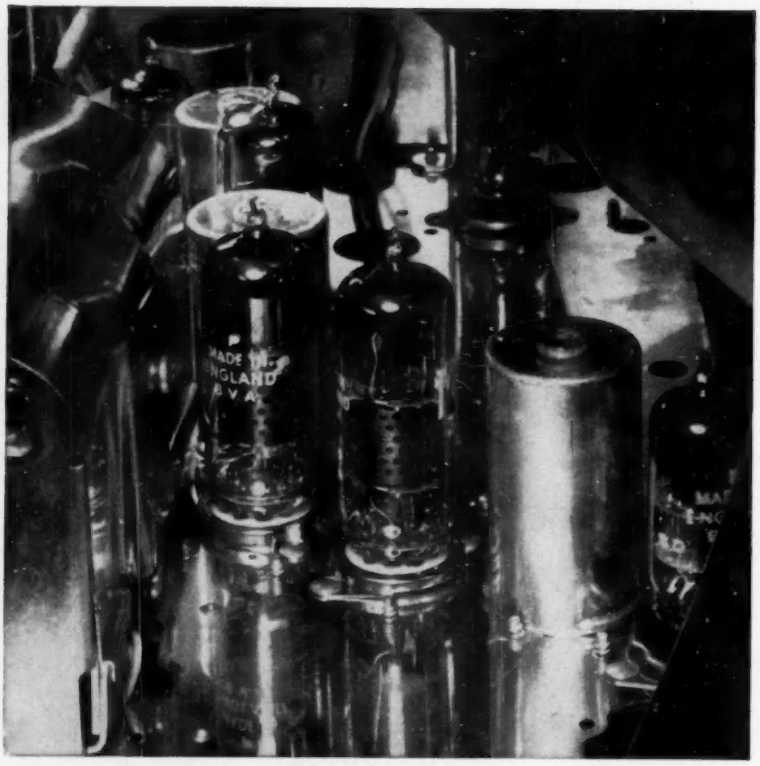

The Ediswan Mazda 'First Preference' range of 0·3 amp. heater current valves provides an up-to-date type for every job in the TV set. In the case of the 6/30L2, 30FL1 and 30PL1 the triode sections have identical characteristics and as a result they permit great flexibility in the physical layout of components.

DOUBLE QUALITY CONTROL

All Ediswan Mazda valves are subject to a stringent system of quality control, and in addition, every type in the First Preference TV range is controlled for secondary parameters which have a vital effect on the performance of TV circuitry.

Ediswan Mazda 'First Preference' Range

TYPE NO.	FUNCTION
30L1	Band 1, 2 & 3, Cascode amplifier.
30C1	Band 1, 2 & 3, Triode pentode frequency changer
30C13	Ditto, specially designed for printed circuit tuners.
30F5	High slope straight IF & Video amplifier pentode.
6F19	High slope var. mu. IF pentode.
6D2	Double diode signal rectifier.
6/30L2	Double triode, LF & time base generator.
30FL1	Triode pentode, for Video, Audio & Time base application.
30PL1	Triode pentode Audio output & frame time base application.
30P12 30P16	Pentode Audio output & frame time base application.
30P4	Line output pentode.
U191	Efficiency diode.
U25	EHT Rectifier (wired-in)
U26	EHT Rectifier (noval base)

• If you are a TV equipment manufacturer we shall be pleased to supply full technical details together with a complete set of valves as listed above for testing on receipt of your enquiry.

EDISWAN
MAZDA

SIEMENS EDISON SWAN LIMITED

An A.E.I. Company. 155 Charing Cross Road, London, W.C.2. Telephone: GERrard 8660. Telegrams: Sieswan, Westcent, London
CRC15/13

CLASSIFIED ADVERTISEMENTS

The charge or these advertisements is 6d. per word. Minimum charge 12/-. Box number 2/- extra, except in the case of advertisements or "Situations Wanted," when it is free. Specially spaced advertisements per inch single column 42/6. A remittance must accompany the advertisement. Replies to Box numbers should be addressed to: "Electronic Engineering," 28, Essex Street, Strand, London, W.C.2. Advertisements must be received before the 14th of the month for insertion in the following issue.

OFFICIAL APPOINTMENTS

ASSISTANTS (SCIENTIFIC). Pensionable posts for men and women. Age at least 17½ and under 26 (unless specially experienced) on 1.1.58. Extension for Forces or Overseas Civil Service. Appropriate educational or technical qualifications and at least two years' relevant experience in one of the groups: (i) Engineering and Physical Sciences. (ii) Chemistry, bio-chemistry and metallurgy. (iii) Biological Sciences. (iv) General (including geology, meteorology, and highly skilled work in laboratory crafts such as glass-blowing). Starting pay from £340 up to £530. Men's maximum (London) £690. Opportunities for promotion and for further education. 5-day week, generally. Write Civil Service Commission, 30 Old Burlington Street, London, W.1, for application form, quoting No. S 59/58. W 2866

COMMONWEALTH OF AUSTRALIA. Commonwealth Scientific and Industrial Research Organization. Division of Electrotechnology. Appointment No.: 750/88 Research Officer. Applications are invited for appointment to a position of Research Officer with the Organization's Division of Electrotechnology, located at the National Standards Laboratory, in the grounds of the University of Sydney, New South Wales. The Division is actively engaged in fundamental research on problems associated with the establishment and determination of electrical measurement standards and now requires a research worker who will concentrate his activities in the high frequency region. Initially he will be asked to concern himself with co-axial line problems at frequencies up to 3 000 Mc/s. Adequate basic measuring facilities are available throughout the Division. The research staff is well backed up by an excellent library service, and highly competent drawing office and workshop staff. The Division is situated in the same building as the Organization's Divisions of Radiophysics, Physics and Metrology and within the grounds of the University of Sydney. Applicants should possess at least a University Honours Degree in Science with Physics or Mathematics as a major subject, or in Physical Engineering, or equivalent qualifications, together with appropriate research experience. Experience in electronic techniques is desirable. Commencing salary is dependent upon the appointee's qualifications and experience and will be determined within the salary range of Research Officer £A1,313-£A1 938 p.a. The appointment will be conditional upon a satisfactory medical examination and the appointee will be required to contribute to, and to receive benefits from the Commonwealth Superannuation Fund, or the Commonwealth Provident Account. An appointee migrating from overseas will be eligible for first-class sea or air transport to Australia for himself, his wife and family. An appropriate contribution will also be made towards fares of an Australian appointee, his wife and family, temporarily abroad for study or similar purposes. Applications quoting Appointment No. 750/88 and stating full name, place, date and year of birth, nationality, marital state, present employment, particulars of qualifications and experience, and of war service, if any, accompanied by the names and addresses of three professional referees and a list of publications, should reach the undersigned, from whom further particulars may be obtained, by the 24th May, 1958. A. Shavitsky, Chief Scientific Liaison Officer, Australian Scientific Liaison Offices, Africa House, Kingsway, London, W.C.2. W 2862

EUROPEAN ORGANISATION FOR NUCLEAR RESEARCH (CERN) Geneva, Switzerland, has a limited number of vacancies for Laboratory Technicians (Electronic, Electrical, Mechanical, Optical), some years of appropriate experience in a physics laboratory essential. Annual salary range 9,000 to 14,000 Swiss Francs, tax free, plus allowances (12 Swiss Francs = £1 approximately). Further information and application forms from Ministry of Labour and National Service, O.S. 32 St. James's Square, London, S.W.1. Ref. 2/OS244/58. W 2869

BRADFORD INSTITUTE OF TECHNOLOGY (College of Advanced Technology). Principal: E. G. Edward, B.Sc., Ph.D., F.R.I.C. Applications are invited for the post of Reader in Electrical Engineering. Applicants should possess high academic qualifications and have considerable research experience. The successful applicant will be expected to organize post-graduate courses and supervise research in the Department. Salary scale, for men, £1,550 to £1,800 per annum. Previous industrial or research experience may be taken into account in fixing the commencing salary. Further particulars of the appointment and forms of application may be obtained from the Principal, Institute of Technology, Bradford, 7. W. H. Leathem, Clerk to the Governors. W 2881

COUNTY BOROUGH OF BOLTON. Bolton Technical College. Applications are invited for the following posts: Electrical Engineering Department. Senior Lecturer in Electronic Engineering to supervise existing courses, develop new courses and organize the electronics laboratories. Applicants must be graduates or possess equivalent qualifications and have had appropriate teaching and industrial experience. Salary scale: £1,350 × £50—£1,550. Application forms, obtainable from the Chief Education Officer, Education Offices, Bolton, by sending a stamped addressed foolscap envelope, should be returned not later than 3rd May, 1958. W 2882

ELECTRONICS TECHNICIAN for Physics Dept, Ducane Road, London, W.12, within 10 days, of new equipment, maintenance of apparatus for radioisotope and radiation measurements. The successful applicant will take part in an interesting and rapidly expanding field of scientific work. Salary scale £475-£600 plus London Allowance. Detailed applications to Secretary, Hammersmith Hospital and Postgraduate Medical School, Ducane Road, London, W.12, within 10 days. W 2884

NORTHAMPTON. College of Advanced Technology, London. Applications are invited, especially from those in industry, for the following additional appointments of lecturers and assistant lecturers in the Department of Electrical Engineering, for the subjects of: (a) Electrical Instruments: (b) Telecommunications: (c) Applied Electronics: (d) General Electrical Engineering. The work of the department is concerned with Degree, and Sandwich Diploma (Dip. Tech.) and post graduate courses in Electrical Engineering. The posts provide facilities for research, development and experience in industrial liaison. Successful applicants, who should possess a Degree in Electrical Engineering, can be given in-service training in teaching methods. Salary scale: Assistant Lecturer: £800 × £25—£1,175 per annum; Lecturer: £1 200 × £30—£1,350 per annum. Plus, in each case, London allowance of £36 increasing to £48 at age 37. Particulars and form of application from the Secretary, Northampton College of Advanced Technology, St. John Street, E.C.1. W 2852

THE POLYTECHNIC, 309 Regent Street, W.1. Electrical Engineering Department. Applications are invited for a post as Assistant Lecturer (Grade B) in Electrical Engineering to take up duties on 1st September, 1958. Candidates should possess a University Degree in Engineering or equivalent qualification and have had suitable industrial experience. Ability to teach Telecommunications and/or Electronics up to the standard of the final B.Sc.(Eng.) and Diploma in Technology examinations will be an advantage. Salary in accordance with the Burnham (Further Education) Scale for Grade B Assistant Lecturer, which rises to a maximum of £1,025 per annum, plus allowances for graduate status (£75), training (£25-£75), and London £36-£48). The commencing salary will depend upon qualifications and experience and may include up to twelve increments in respect of approved service in industry. The posts are subject to superannuation and some concession in this respect may be made for previous industrial employment. Further particulars and application form, to be returned no later than 2nd May, 1958, may be obtained by sending a stamped addressed foolscap envelope to the undersigned. J. E. Richardson, Director of Education. W 2875

ESSEX EDUCATION COMMITTEE, South-East Essex Technical College, Longbridge Road, Dagenham. Required in September: Assistant Grade "B" to teach mainly Radio and Television Servicing and Electrical Technicians (Electronics) Courses. Teaching and servicing experience is desirable. Salary: £650 × £25 to £1,025, plus additions for Degree or equivalent, approved training and London allowance. Increments within scale for previous teaching service, approved industrial experience and War/National Service. Details and application forms (stamped addressed foolscap envelope) from the Clerk to the Governors at the College. W 2874

IMPERIAL COLLEGE OF SCIENCE AND TECHNOLOGY. Applications are invited for the post of Laboratory Steward to be responsible for the Control Engineering teaching and research laboratories. The post offers exceptional opportunity of wide experience in this subject. A thorough knowledge of electronic circuits and electro-mechanical apparatus is essential; experience of hydraulic or pneumatic systems desirable. The post is graded initially as Senior Technician, salary £590 × £20—£690, plus London Weighting. Applications to the Professor of Electrical Engineering, Imperial College, London, S.W.7, not later than 16th May. W 2885

KENT EDUCATION COMMITTEE. Medway College of Technology. Applications are invited for appointment as full-time Assistant Lecturer Grade B in Electrical Engineering. Candidates should be University Graduates, experience in Telecommunications is desirable. Salary scale £650 × £25 to £1,025, together with allowances in accordance with the Burnham Award. Starting salary according to qualifications and experience. Particulars and application form from the Principal, Medway College of Technology, Horsted, Maidstone Road, Chatham, Kent/s.a.e. W 2859

MINISTRY OF TRANSPORT & CIVIL AVIATION requires Electrical Engineers (Assistant Signals Officers) for aviation telecommunications and electronic navigational aids. Minimum age 23. 1st or 2nd Class Degree in Physics or Engineering, or A.M.I.E.E. or A.F.R.Ae.S. (candidates with Parts I, II and III of A.M.I.E.E. or Parts I and II of A.F.R.Ae.S. or equivalent, or of very high professional attainment without these qualifications considered). Salary £665 (age 23) to £1,085 (age 34). Maximum £1,250. Slightly lower outside London and for women. Five-day week. Further details and forms from M.L.N.S., Technical and Scientific Register (K), 26 King Street, London, S.W.1, quoting D129/8A. W 2880

THE UNIVERSITY OF MANCHESTER, Jodrell Bank Experimental Station. There is a vacancy for a senior Engineer in connexion with the 250-ft. steerable radio telescope at the Jodrell Bank Experimental Station of the University of Manchester. The successful candidate will be responsible for the safety of personnel and the maintenance of the telescope, including the electrical and mechanical parts and the electronic instrumentation associated with the drive and computing systems. In addition, he will be required to organize the duties and routine of the controllers; to act, when required, as controller to ensure 24-hour continuity of the research programmes; and to undertake such other duties as may be assigned to him. Applications are invited from persons with experience in the supervision and maintenance of heavy engineering and electrical equipment. Some general acquaintance with electronics is desirable. Membership of the Institute of Mechanical and/or Electrical Engineers or a First Class Board of Trade Certificate in Marine Engineering. Membership of the Institution of Marine Engineers; or some other equivalent qualification, is essential. The commencing salary will depend on qualifications and experience up to a maximum of £1,250 per annum, with membership of the F.S.S.U. and children's allowance. Applications giving the names and addresses of two referees should be addressed to The Bursar, University of Manchester, Oxford Road, Manchester, 13. W 2879

OFFICIAL APPOINTMENTS (Cont'd.)

LONDON COUNTY COUNCIL. South East London Technical College, Lewisham Way, S.E.4. Required for September, 1958, Visiting Lecturers (day and evening) for possible vacancies in following subjects: Physics (Heat) up to Honours standard; Electronics and Control Systems A1-A2; Electrical Engineering & Science S1-S3; Radio & Television Service, Inter, and Final. Application forms and details of payment from Secretary at College. (518). W 2856

THE UNIVERSITY OF MANCHESTER, Radio Telescope—Duty Controller. A vacancy exists for a post of Duty Controller in connexion with the 250-ft. steerable radio telescope at the Jodrell Bank Experimental Station of the University of Manchester. The commencing salary, which will depend on qualifications and experience, will not exceed £650 per annum, but will be subject to review later. The radio telescope is driven by remote control and the person appointed will be required to work on a shift basis in the control room of the telescope. Under normal conditions the duties will include the simple following of operating instructions as determined by the research programmes, but quick judgment may be necessary when emergencies arise. The duties include the routine maintenance of the electronic control equipment and instrumentation in the control room. Candidates must be physically fit, with good eyesight, and be capable and willing to work on a shift basis to cover the 24 hours. They must be capable of keeping full, accurate and tidy records relating to the duties entrusted to them. Candidates must hold a Higher National Certificate in Electrical Engineering, or a senior City and Guilds Certificate in some branch of light current electrical engineering or similar qualifications. Previous experience of the control of plant or apparatus containing both electrical and mechanical parts is desirable. Applications, giving full details of qualifications and experience as well as the names and addresses of two referees, should be sent to Professor A. C. B. Lovell, Director, Jodrell Bank Experimental Station, Lower Withington, Macclesfield, Cheshire. W 2878

SITUATIONS VACANT

A GRADUATE PHYSICIST with research experience is required by British Cellophane Limited, Bridgwater, Somerset. The work will be on laboratory investigations of an applied and fundamental nature into physical processes to supplement the work of an electronic section. Write to Personnel Officer, quoting Ref. No. R72. EE. W 2837

BRITISH PETROLEUM COMPANY LIMITED has a vacancy for an Electronic Engineer for work in the Instrument Group at its Research Station at Sunbury-on-Thames. Applications are invited from men with a University Degree in Physics or Electrical Engineering or equivalent. Some experience in the design and development of electronic instruments preferable. Work will include development of instruments for the control and testing of internal combustion engines, for process control, and for chemical and physical measurements. Age under 35. Salary according to age, qualifications and experience. Non-contributory Pension Fund. Assisted House Purchase Scheme. Removal expenses and settling-in allowance payable in certain cases. Luncheon Club. Write, giving full details, quoting H.3303A, to Box 5736, c/o 191 Gresham House, E.C.2. W 2877

BRITISH THOMSON-HOUSTON CO. LTD. The British Thomson-Houston Co. Ltd., has a vacancy for an engineer or physicist in the Valve Engineering Group of its Research Laboratory at Rugby. This group is concerned with the development and application of new constructional techniques for valves and semiconductor devices; the work covers a wide field of activity and is of exceptional interest. The applicant selected for this appointment will, after a short introductory period, also be expected to take charge of a small batch construction group. Previous experience in the valve industry is not essential. Applicants having a minimum qualification of Higher National Certificate are invited to write to the Director of Research, The British Thomson-Houston Co. Ltd., Rugby, quoting Reference FCWT. W 2821

ELECTRICAL ENGINEER. A well-established group of companies in the West London area is expanding its activities in the automatic control field. This appointment is with the research and development division. The successful applicant will be responsible for carrying out measurements on magnetic materials, and experimental work on static magnetic devices including magnetic amplifiers. Candidates must possess a University Degree. Experience with magnetic devices is of value but not essential. Most importance is attached to a sound knowledge of fundamentals and an original approach to the work. Top salary with pension scheme facilities is offered. Excellent opportunity to gain valuable experience in a new field, and to advance with a growing concern. Apply to Technical Director, Gresham Developments Limited, Gresham House, Hanworth, Middlesex. W 2873

ELECTRONIC ENGINEER required for important work in a small Electronics Laboratory near St. Albans concerned with the design and development of a wide range of equipment used for the instrumentation of aircraft and ground test rigs. Applicants, who should possess a Degree or H.N.C. in electrical engineering or physics, must have a good all round knowledge of electronics as applied to instrumentation, the field of particular importance including Carrier Amplification and Associated Transducers, Recorders, etc. Full details to Box W 2860.

ELECTRONIC ENGINEER. A Mechanical or Electronic Engineer with experience in control electronics is to be appointed to an environmental test team engaged in guided flight work. He should be qualified by a Degree or H.N.C., and will undertake the supervision of vibration testing. Alternatively, a man with the appropriate Services experience would be considered. Apply to the Personnel Manager (Ref. 757), Elliott Brothers (London) Limited, Borehamwood, Herts. W 2855

ELECTRONIC ENGINEERS required for interesting work on transistor hearing aids, miniature transistor amplifiers and miniature components. Engineers of graduate status or with H.N.C. plus good industrial experience, will have an opportunity to work with maximum freedom to develop their own ideas. Congenial surroundings, good colleagues and an attractive starting salary. Apply, Chief Engineer, Ardente Acoustic Laboratories Ltd., 8/12 Minerva Road, North Acton, London, N.W.10. W 1005

ELECTRONIC ENGINEER is required for the Electronic Section of the Engineering Research Division of large aircraft Company. Duties will include design and development of vibration test equipment, temperature control systems, and other specialized research equipment. Preference will be given to candidates holding a degree of the Higher National Certificate (with endorsements for electronics) and having had experience in the above field. Applications with full particulars of qualifications and experience should be addressed to the Personnel Manager, A. V. Roe & Co. Ltd., Greengate, Middleton, Manchester. W 2870

ELECTRONICS ENGINEER. An Electronics Engineer with O.N.C. or equivalent is required for a post in an expanding computer group which is developing novel types of digital computers. Applications should be addressed to A. V. Roe & Co. Ltd., Hanworth Lane Chertsey, Surrey. W 1006

ELECTRONIC ENGINEERS are required for an extensive development programme on Radar Navigational Aids. Applicants should have experience in this field and preferably also in working with the Ministry of Supply. Senior Engineers are needed to act as project leaders while juniors are also required for detail design work. The laboratories are situated in a new town giving easy access to London and the countryside. The nearby Hatfield Technical College offers excellent facilities for study. Amenities include pension scheme and a wide range of spurts club activities. Applications giving full details of experience, qualifications and age will all be seen by the Chief Engineer, Electronics Division, but should be addressed initially to the Personnel Manager (E.48), Murphy Radio Limited, Welwyn Garden City. W 2836

ELECTRONIC ENGINEER required to take charge of all electric control gear and switchboard department, of company near Birmingham. Applicants will be directly responsible to directors and should be capable of designing any type of electric automatic control system to meet customers specifications, and should particularly have a complete knowledge of magnetic amplifier systems applied to automatic voltage control of alternators. Applicants should be educated at the standard of University Degree or High National Certificate, and should state age and experience in strict confidence, to Box W 1007.

ELECTRONIC WIRING ASSISTANTS. Applications are invited from men experienced in Wiring Electronic Equipment, able to work from circuit diagrams and preferably used to Prototype work. Five-day week, canteen and superannuation scheme. Please write stating age, experience and salary required, quoting Ref. B33, to the Personnel Officer, Hilger and Watts Ltd., 98 St. Pancras Way, Camden Road, N.W.1. W 2854

ENGINEERS required for work in connection with Computers, T.V. Broadcast Equipment, F.M. Transmitters, Electronic Instruments, Electronic M/C Tool Control. Whilst an H.N.C. or O.N.C. qualification is desirable, the overriding requirement is a sound theoretical knowledge of electronics. Superannuation Scheme. Single lodging accommodation available. Saturday morning interviews by appointment. Call or write: Personnel Department (E/22) E.M.I. Electronics Ltd., Blyth Road, Hayes, Middlesex. W 2863

J. LANGHAM THOMPSON GROUP. Engineers required for Development work involving Transductors, Transistors and Electronics. The ability to 'get things done' will rate as highly as academic qualifications and the successful candidate will have ample scope for initiative and originality in meeting the requirements of an expanding programme. Please apply in writing to: Messrs. J. Langham Thompson Ltd., 2/4 Wigton Gardens, Stanmore, Middlesex. Quoting reference: KAB/JLT. W 2871

CLASSIFIED ADVERTISEMENTS
continued on page 4

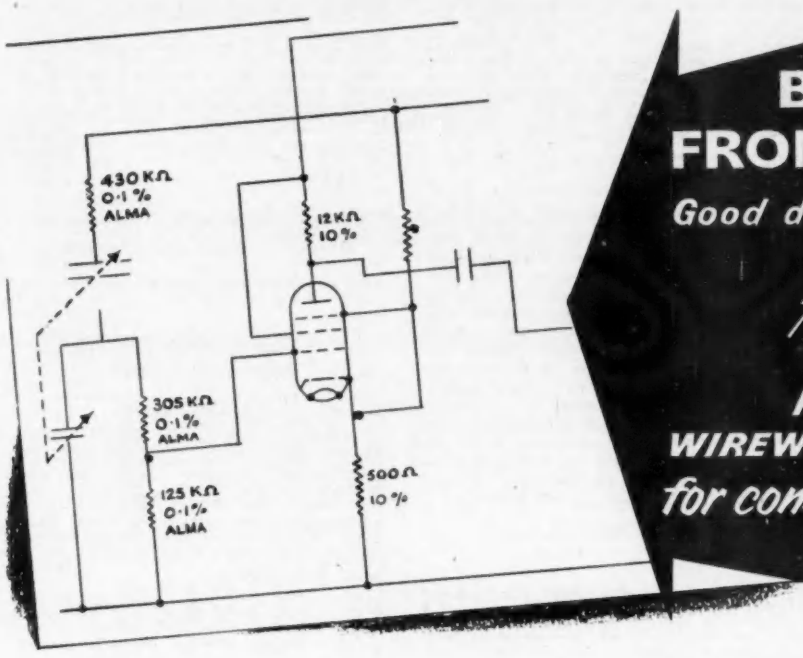

BE RIGHT FROM THE START

Good designs incorporate

Alma

PRECISION WIREWOUND RESISTORS

for consistent accuracy

Alma **COMPONENTS Ltd.**

551 HOLLOWAY ROAD, LONDON N.19
Telephone: ARCHWAY 0014/5

A.I.D. & A.R.B. APPROVED

Specify ALMA PRECISION WIREWOUND RESISTORS to ensure complete and consistent reliability. Designed and manufactured to meet exacting requirements they have improved stability and a guaranteed temperature coefficient. A large range of standard types are available including miniature types, or special resistors can be built to customer's own specifications. Please ask for details.

THIS IS THE LEWIS VALVE RETAINER

This is the valve retainer everyone has been waiting for, the Lewis high-quality, high-efficiency retainer made in sizes to RCS 257 and RCL 257. Cadmium plated DTD 904, Passivated DTD 923, connecting springs in stainless steel from EN 58A. Send to-day for samples and prices.





Lewis are also makers of Beryllium Copper 'Wavey' Washers and springs and pressings in Beryllium Copper for the electrical and electronic industries. Full details will gladly be sent on request.

LEAVE IT TO **Lewis** *OF REDDITCH*

SPRINGS, SPRING CLIPS
PRESSWORK, WIRE FORMS
VOLUTE SPRINGS

THE LEWIS SPRING CO LTD • RESILIENT WORKS • REDDITCH

TELEPHONE: REDDITCH 720/PBX London Office: 122 High Holborn, W.C.1. Telephone: Holborn 7470 and 7479

SITUATIONS VACANT (Cont'd.)

ENGINEERS with some five years' practical experience of radio frequency design work required for interesting new project in laboratory situated in South West outskirts of London. Pension scheme. Write giving full particulars of experience and salary required to Box W 1976.

ERICSSON TELEPHONES LTD. have in their Research Laboratories a number of vacancies for circuit designers and equipment engineers to work on nucleonic instruments, and interesting new developments in electronic computing and switching; both senior and junior posts are available. Applicants should have a degree or equivalent plus several years' experience of appropriate work for the senior posts; correspondingly reduced qualifications and experience will be accepted for junior posts. Salaries will be in accordance with age, qualifications and experience. Applications, giving details of age, academic or other training and qualifications, experience and starting salary required, should be sent to the Personnel Officer, Ericsson Telephones Ltd., Beeston, Nottingham. W 197

LOUIS NEWARK LIMITED require a Development Engineer for work on Aircraft and Industrial Instruments in their Laboratory at New Addington. Candidates should preferably have a Degree and have some experience of either Capsule type instruments or servo engineering. Pension Scheme. Please apply in writing to Personnel Officer, Louis Newark Ltd., Purley Way, Croydon, Surrey. W 2868

PLESSEY NUCLEONICS. The Atomic Energy Unit of the Plessey Group of Companies require several Senior Draughtsmen for interesting design work in connection with U.K.A.E.A. contract and private venture development of electronic equipment for nuclear reactor applications, radiological defence and many other allied fields. Previous experience in the design of electronic, radio or light current electrical equipment essential. Familiarity with Ministry specifications an advantage. These positions offer excellent salaries and prospects for advancement in an expanding Company. It is intended to appoint a Section Leader to control the Electronics section of the Drawing Office. All suitably qualified applicants will be considered for this position. Box W 2861.

PRODUCTION MANAGER REQUIRED, experienced in C.R.T. and High Vacuum techniques with a Company engaged in Cathode Ray Tube reconstruction. There are excellent prospects in a growing Company for the right man. Interview arranged in London. Write in confidence full details to Box W 1004.

SENIOR DEVELOPMENT ENGINEER required to take charge of detailed design and development of vacuum tubes in Research and Development Laboratories specializing in Cathode-Ray Tubes, Storage Tubes and similar devices. Must have at least five years' experience of vacuum technique, preferably industrial, and a working knowledge of electronic circuit principles. Physics degree or equivalent desirable, together with some mathematical ability. A wider background of experience may be acceptable in place of a Degree but some academic knowledge is essential. Must be capable of leading a team of experienced experimental workers. Salary range £1,000-£1,400 per annum. Box W 1013.

SENIOR ELECTRICAL ENGINEER. This appointment is in a newly formed research and development division of a well established group of companies in the electronic and light electrical engineering field. The person appointed will be responsible to the Director of the Company for the design and development of high quality electronic equipment associated with automatic control systems. Candidates must possess a University Degree and several years' experience in the electronic design and development field. Original design ability is of particular importance. A good salary commensurate with qualifications and experience is offered. Excellent advancement prospects dependent upon ability and intintive. Pension Scheme. Apply to Technical Director, Gresham Developments Limited, Gresham House, Hanworth, Middlesex. W 2872

SENIOR ELECTRONICS ENGINEERS with experience and technical ability. App'y the Research & Organisation of A.G.I. Ltd., 105 Lansdowne Road, Croydon. W 1008

SENIOR ELECTRONIC ENGINEER required by Louis Newmark Ltd., for work at their New Addington Laboratories on design problems in relation to control systems with particular emphasis on the development of new components and transistor circuitry. Applicants should possess a Degree and should have had considerable industrial experience. Pension Scheme. Apply in writing to: Personnel Officer, Louis Newmark Ltd., Purley Way, Croydon, Surrey. W 2858

TELEVISION RESEARCH AND DEVELOPMENT. A fully qualified and experienced Television Engineer is now required to join an expert team of Engineers engaged in one of the most advanced technical development programmes in the industry. This includes colour research; wide angle scanning; combined T.V./F.M. Radio Receivers; advanced (but realistic) projects. The well-equipped Laboratories of the Company are situated in a convenient West London district, and a high commencing salary will be offered to the right man. The position is permanent and pensionable and offers considerable scope for advancement. Please write (in strict confidence) giving full particulars of experience, qualifications, present salary level, to Box W 2843.

TV MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED, Chelmsford, require experienced engineers to undertake the installation and commissioning of television transmitters and associated equipment. The majority of the assignments are overseas and offer attractive prospects to suitable applicants. Applications can also be considered from young engineers possessing academic qualifications, but who have not yet obtained the necessary experience of this type of work as suitable familiarization training can be given. The appointments are permanent and pensionable with good starting salaries and generous overseas allowances. Write in confidence, giving full details and quoting reference EE.2104A, to Mr. J. L. Scott, Department C.P.S., Marconi House, 336/7 Strand, London, W.C.2. W 2865

VICKERS GROUP, RESEARCH ESTABLISHMENT. DESIGN ENGINEERS. Applications are invited for the posts in the central research establishment of the Vickers Group by Design Engineers. Experience in Electronic, Electrical, Hydraulic, small Mechanism, and Machine Tool Engineering is a valuable asset in the order as stated. The Duties of the occupants of the posts are the design and supervision of the construction of both experimental and prototype equipment in conjunction with the Scientists of both the Research and Development Divisions. It is desirable that the Design Engineers take part in the experimental work in the laboratories. The Minimum Qualifications desirable are Corporate Membership of a Professional Institution. The Experience necessary varies with seniority. Successful applicants must have complete familiarity with drawing office and workshop practice and be able to work in close liaison with scientists. Salaries are commensurate with Experience and Qualifications. Applications should be made in the first place to Vickers Group Research Establishment, Brooklands Road, Weybridge, Surrey. W 2825

TECHNICAL SALES REPRESENTATIVE. Leading firm of electrical component manufacturers situated in N.W. London require Technical Sales Representative with first-class knowledge of radio, television and electronic industries as to cover mainly Southern England territory. Superannuation scheme available for men up to 50 years of age and a car will be provided. Salary up to £1,000 p.a. Write stating age and experience, in chronological sequence to Box 3M P893, A.K. Advg., 212a Shaftesbury Avenue, London, W.C.2. W 2883

SITUATIONS VACANT Continued on p. 8

SITUATIONS WANTED

LINGUIST, French, German, Italian, Polish. Nationality British (35), eight years' design experience in radio communication and electronics, seeks change, in export, publicity, etc. Box W 1010.

REPRESENTATIVES SELECTED and introduced by Commercial Travellers Appointment Specialists. 15 Golden Square, London, W.1. W 1003

TECHNICIAN. Layout and construction of electronic equipment from theoretical diagram only. Skilled engineer and draughtsman. Period of project or as required. Resident West London. Box W 1009.

EDUCATIONAL

CITY AND GUILDS (Electrical, etc.) on "NO PASS—NO FEE" terms. Over 95 per cent successes. For full details of modern courses in all branches of Electrical Technology send for our 144-page handbook—FREE and post free. B.I.E.T. (Dept. 337c), 20 Wright's Lane, London, W.8. W 316

FREE! BROCHURE giving details of course in Electrical Engineering and Electronics, covering A.M.Brit.I.R.E., City and Guilds, etc. Moderate fees. Write to E.M.I. Institutes, Dept. EE29, London, W.4. (Associated with H.M.V.) W 4953

NORTH STAFFORDSHIRE TECHNICAL COLLEGE, Stoke-on-Trent. Principal: H. W. Webb, O.B.E., D.Sc., F.R.I.C., M.I.Chem.E., F.I.Ceram. College of Ceramics. Course on Electrical and other Technical Ceramics. There will be a four-day course of lectures on the above subject at the College of Ceramics, North Staffordshire Technical College, Stoke-on-Trent, from Tuesday, 3rd June to Friday, 6th June inclusive, from 10.0 a.m. to 1.0 p.m., and from 2.0 p.m. to 5.0 p.m. each day. Specialists in the various fields will summarise the present position regarding porcelain, steatite, alumina, borides, carbides and nitrides, cermets, ferroelectrics, ferromagnetics and semi-conductors. The fee for the course will be £2. Further particulars may be obtained from the Principal, North Staffordshire Technical College, Stoke-on-Trent. H. Dibden, Clerk to the Governors. W 2864

THE UNIVERSITY OF MANCHESTER. National Research Development Corporation Scholarships. Applications are invited for the above scholarships each of an annual value of £300, tenable in the Computing Machine Laboratory for one year, with the possibility of renewal up to three years. Candidates should be graduates in Physics or Electrical Engineering interested in the design of Digital Computing Machines. Scholarships of an annual value of £500 tenable under the same conditions, may be awarded to graduates with suitable qualifications and research experience, who must devote their whole time to research in the University, except that they may be asked to undertake a limited amount of teaching in the University. Applications should be sent not later than July 1st, 1958, to the Registrar, The University, Manchester 13, from whom forms of application may be obtained. W 2857

CLASSIFIED ADVERTISEMENTS
continued on page 6

very low energy Beta measurements

EKCO *Type N612* scintillation counter

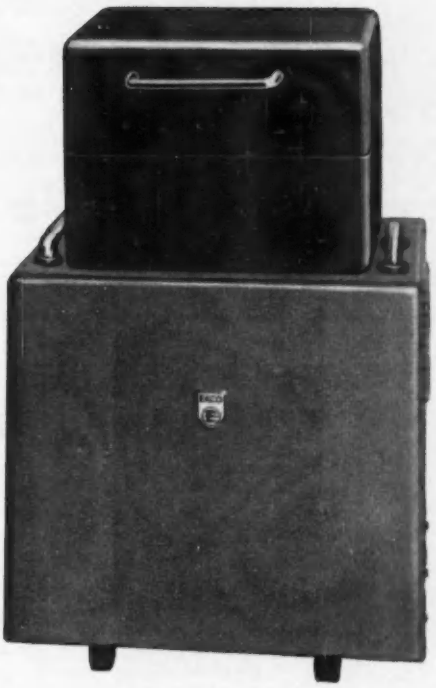

Measurement of low and very low energy Beta emitters, such as carbon 14 and hydrogen 3 (tritium), presents no difficulties with this specially designed Ekco scintillation counter which can be used with any scaler or ratemeter providing the necessary power supplies.

Carbon 14 counting efficiency of 50% can be obtained at room temperatures with a background count of 1-2 per second. At −20° C. tritium counting efficiency can exceed 10% with a background count of 10-15 per second.

The sample, either dissolved in a liquid phosphor such as diphenyl-oxazole in toluene (PPO) or suspended in a 'gel' (PPO-thixcin), is prepared in a small (about 25 ml) glass container.

To enable this counter to be used under normal lighting conditions, an interlocked shutter is incorporated which can be opened only when a lid is closed over the sample.

The sample chamber is shielded against external radiation from all directions by 2.5 c.m. of lead and is contained, together with an amplifier, in a strong steel case which is fitted with carrying handles.

WE ARE EXHIBITING AT THE INSTRUMENT & ELECTRONICS IN AUTOMATION EXHIBITION, OLYMPIA, APRIL 16-25, STAND NO. 505

Write for full details of this and other EKCO instruments to:—

EKCO ELECTRONICS LIMITED

SOUTHEND-ON-SEA, ESSEX

EDUCATIONAL (Cont'd.)

T.V. AND RADIO—A.M.Brit. I.R.E., City & Guilds, R.T.E.B. Certificate, etc., on "No Pass —No Fee' terms. Over 95 per cent successes. Details of Examinations and Home Training Courses in all branches of Radio and T.V. Write for 144-page handbook—Free. B.I.E.T. (Dept. 337H), 29 Wright's Lane, London, W.8. W 187

UNIVERSITY OF EDINBURGH. Principal: Sir Edward Appleton, G.B.E., K.C.B., D.Sc., F.R.S. Diploma in Electronics and Radio. The one year Post-Graduate Diploma Course in Electronics and Radio will commence on 7th October, 1958, and will provide specialised training for those wishing to proceed to research in this field, or to employment in industrial organisations. Applicants should hold an Honours Degree in Electrical Engineering, Mathematics or Physics. The main lecture courses are in network theory, principles of value and transistor circuits, transmission and radiation theory, and particles in fields. Laboratory and field work will be arranged to support the lecture courses. A limited number of grants can be made available for suitable candidates. Further particulars and application forms can be obtained from the Secretary to the University, University of Edinburgh, Old College, South Bridge, Edinburgh, 8. Charles H. Stewart, Secretary to the University. W 2853

CAPACITY AVAILABLE

ELECTRONIC. Electro-mechanical assembly. Complete equipments, prototypes, sub-assemblies, cable-forms, etc. Inspection, test, collection and delivery. Contronics Ltd., Blackdown, Surrey, near Aldershot, Hants. Deepcut 236. W 1990

SMALL FIRM have capacity available for design and development of prototypes, models, etc. Can successfully carry out small scale production in spite of frequent alterations in design. A.I.D. approved. Reasonable charges. Fyfe, Wilson & Co. Ltd., Station Works, Bishop's Stortford. W 1011

SERVICE

A NEW SERVICE FOR INDUSTRY. To meet the changing requirements of industry in the European Common Market, and free trade zone, a large and well established engineering group in the London area offers a complete consultancy service to firms who may be faced with increasing development and marketing difficulties. Having ourselves been faced with the necessity of providing facilities for market research, design, development, model shop, tool making, type testing, etc., we are able to offer a complete consultancy service backed by all necessary engineering and marketing facilities to assist firms requiring it and we work closely with American Associates specialising in placing U.S. patents in this country and can, therefore, help in finding new production items. This offer is primarily directed towards firms requiring it for a limited period in order to find new lines and develop them to pilot production stage. The total available capacity of this service is estimated at £250,000 p.a. of which approximately £100,000 will become available to firms outside the organisation, whatever amounts are required. All correspondence will be treated as strictly confidential. Principals please write to Box W 2812.

ATTENUATOR VANES, precision in excelsis, from Jencons (Scientific) Ltd., Mark Road, Hemel Hempstead. Tel.: Boxmoor 4621. W 2739

BROXLEA—for reliable sub-contracting services. See announcement on page 127. W 2876

METALWORK. All types cabinets, chassis racks, etc., to your own specifications. Phillpot's Metal Works Ltd., Chapman Street, Loughborough. W 3592

FOR SALE

KELVIN AND HUGHES four channel high speed pen recorders for sale. New and as new. Full details, write Box W 1002.

GUARANTEED MAGSLIPS at low prices. 3 in. Resolver No. 5 (AP 10861), 50v, 50c/s. Unused, each in tin, 35s. post 2s. 1d. Large stocks of these and other types.—P. B. Crawshay, 94 Pixmore Way, Letchworth, Herts. Tel.: 1851. W 321

MAGSLIPS, SELSYNS and many other items connected with automatic and remote control mechanisms are marketed by Servo & Electronic Sales Ltd. Brochure available on request. See our display advertisement on p. 154. W 202

PANL, recognized for many years as the unique one-coat black crackle finish. Brush applied, no baking. Available by post in 1/8th pint cans at 3/9 from G. A. Miller, 255 Nether Street, London, N.3. W 327

PORTAWAY Earthing System for Electrical Safety, comprising Earthing Conductors, range of Bonding Clamps and Earth Electrodes. Good delivery. New brochure available from Porter Electrical Products Limited, 2 North Park Road, Harrogate. Phone: 3853. W 312

PRECISION WIREWOUND RESISTORS. ¼ and ½ watt tubular, encapsulated, axial leads. Stability ·001 per cent. ·1ohm to 1megohm. ½ per cent and ¼ per cent accuracy. G.E. Instruments, 118b Station Road, Redhill. Redhill 4918. W 1012

PATENTS

WELL-KNOWN FIRM of Precision Engineers and Instrument Makers (London area) are desirous of entering into a Licence Agreement or purchasing outright, Patents relating to electrical and/or mechanical devices of a Precision Instrument character, or of a consumer goods nature. Adequate capital and production facilities are available to develop, produce and market suitable devices. Communications should be addressed, in the first instance, to Major S. F. M. Neill, Louis Newmark, Ltd., Croydon, Surrey. W 2172

SITUATIONS VACANT (Cont'd.)

TELEPHONE MANUFACTURING COMPANY LIMITED

This advertisement will interest Electrical Engineers with experience of one or more of the following fields:

A. LIGHT ELECTROMECHANICAL COMPONENTS

B. INDUSTRIAL CONTROL EQUIPMENT

C. POLARISED RELAYS AND SIMILAR POLARISED DEVICES

Applications are invited from suitably qualified men for the following appointments:

SENIOR DESIGN & DEVELOPMENT ENGINEERS—These appointments offer a high degree of freedom for individual initiative and require relevant industrial experience. Preferred age group 35–45 years. Commencing salary commensurate with age and experience and rising to £1720 per annum. There are good prospects for further advancement to managerial level later.

JUNIOR DESIGN ENGINEERS—Minimum qualification Higher National Certificate. Salary according to age and experience.

SALES ENGINEERS—Duties will consist of evaluating customers requirements by correspondence and personal contact. Previous sales experience essential. Minimum qualification Higher National Certificate. Salary according to age and experience.

Write in confidence stating age, qualifications and experience to:

PERSONNEL MANAGER,
Telephone Manufacturing Company Limited
Hollingsworth Works, Martell Road, West Dulwich, S.E.21
Telephone: GIPsy Hill 2211

FERRANTI LIMITED
WYTHENSHAWE
MANCHESTER.

has vacancies in the Laboratories for

Senior and Junior

DEVELOPMENT ENGINEERS

for work on the design and development of electro-mechanical instruments for use in Guided Weapons.

The laboratories are housed in a modern building which is situated in pleasant surroundings on the Cheshire boundary with easy access to rural areas. The Company has a Staff Pension Scheme and an Assurance Scheme for Dependants.

The commencing salary will depend on age, qualifications and experience.

Forms of application can be obtained from
T. J. Lunt, Staff Manager,

Ferranti Limited,
Hollinwood, Lancs.

Please quote reference DBD.

PERFORMANCE ASSURANCE WITH

COSSOR

PRINTED CIRCUITS

Model 1071K ***Double Beam*** *Kit Oscilloscope*
List Price £69.0.0
Hire Purchase Facilities
Trade Terms on Application

AN INSTRUMENT RANGE IN KIT FORM

Q. *Why has Cossor Instruments decided upon this innovation?*

A. To make available a range of first-class measuring instruments **at a considerable saving in cost to the Buyer.**

Q. *Are Kit instruments inferior in performance to their Factory-built equivalents?*

A. Certainly not. If assembled and wired exactly in accordance with the Manual of Instructions.

Q. *A certain skill must, surely, be required to build these instruments?*

A. None beyond the ability to use a small soldering iron.

Q. *How can a performance specification be maintained without setting up with test equipment?*

A. Largely by the use of PRINTED CIRCUITS which allow no interference with the layout of critical parts of the circuit.

Q. *How many Kit instruments are at present available?*

A. Three. Two Oscilloscopes, a Single-Beam and a Double-Beam, and a Valve Voltmeter. Others will follow shortly.

Q. *Could I have more information on these interesting instruments?*

A. With the greatest of pleasure. Just write to:

COSSOR INSTRUMENTS LIMITED

The Instrument Company of the Cossor Group

COSSOR HOUSE · HIGHBURY GROVE · LONDON, N.5

Telephone: CANonbury 1234 (33 lines) Telegrams: Cossor, Norphone, London Cables: Cossor, London

Mullard

MULLARD LIMITED

are about to make
several new appointments in their

SEMICONDUCTOR DIVISION

Due to rapid expansion in the Company's Semiconductor activities, Mullard Limited invite applications for the following posts:-

(A) TECHNICAL/COMMERCIAL REPRESENTATIVE (SALES ENGINEERING)

Applicants should be graduates or equivalent in electrical engineering, telecommunications or physics, and/or have had successful experience in the development and design of electronic equipment.

(B) COMMERCIAL REPRESENTATIVE

Applicants should have had experience as commercial representatives dealing with executives and buyers in the electronic manufacturing industries. Experience in or knowledge of the valve or component industries would be an advantage.

(C) HEAD OF THE TECHNICAL OFFICE

A graduate engineer or equivalent is required to take charge of the technical office handling data, applicational material, technical correspondence, etc. He should preferably have had similar experience, or experience in valve or semiconductor measurements.

(D) HEAD OF COMMERCIAL OFFICE

An experienced chief clerk is required to take charge of a commercial office handling Government contract matters, commercial records, etc.

There will also be vacancies for :—

(E) TECHNICAL ASSISTANTS

Technical assistants of at least G.E.C. level are required in the Technical Office.

(F) RECORDS CLERKS

Experienced Records Clerks are required for the Commercial Office.

(G) SUPPLIES CLERKS

Experienced Supplies Clerks are required for the Supplies Office.

Applications in writing should be sent to the Personnel Officer,

MULLARD HOUSE,
TORRINGTON PLACE, LONDON, W.C.1.

FERRANTI LTD.
WYTHENSHAWE · MANCHESTER

has a vacancy in the Electronics Laboratories for a

TECHNICAL ASSISTANT

preferably of Graduate status.

The successful applicant will participate in the electrical work carried out in the laboratories and will be particularly concerned with gas discharge devices.

The laboratories are housed in a modern building which is situated in pleasant surroundings on the Cheshire boundary with easy access to rural areas. The Company has a Staff Pension Scheme and an Assurance Scheme for Dependants.

Forms of application can be obtained from **T. J. Lunt, Staff Manager, Ferranti Ltd., Hollinwood, Lancs.** Please quote ref. WFG.

DESIGNERS/DRAUGHTSMEN

As a result of further expansion, the Aviation Division of Elliott Brothers (London) Limited, Borehamwood have the following vacancies in their Design and Drawing Offices: —

1. **ELECTRONIC DESIGNERS**
2. **ELECTRONIC DRAWING OFFICE SECTION LEADER**
3. **SENIOR ELECTRONIC DRAUGHTSMEN**
4. **JUNIOR ELECTRONIC DRAUGHTSMEN**

The work is in the field of Airborne Navigational Aids and is both varied and interesting. Salaries will be paid commensurate with experience and qualifications.

Apply to Personnel Department (Ref: Aviation Division)
ELLIOTT BROTHERS (London) LIMITED
Elstree Way, Borehamwood.

Radio and Allied Industries Ltd.

have vacancies for a number of

SENIOR DEVELOPMENT ENGINEERS

for

FM/AM receiver design and television development for home and export requirements, also general electronic development.

Applicants should have a university degree or a few years successful development experience. The positions are progressive and high salaries are offered to successful candidates. Appointment involves membership of the Company's pension and life assurance schemes.

Applications should be addressed to the:

Head of Development,
Radio and Allied Industries Ltd.,
Wexham Road, Slough, Bucks.

new research projects at Hollerith

Regd.

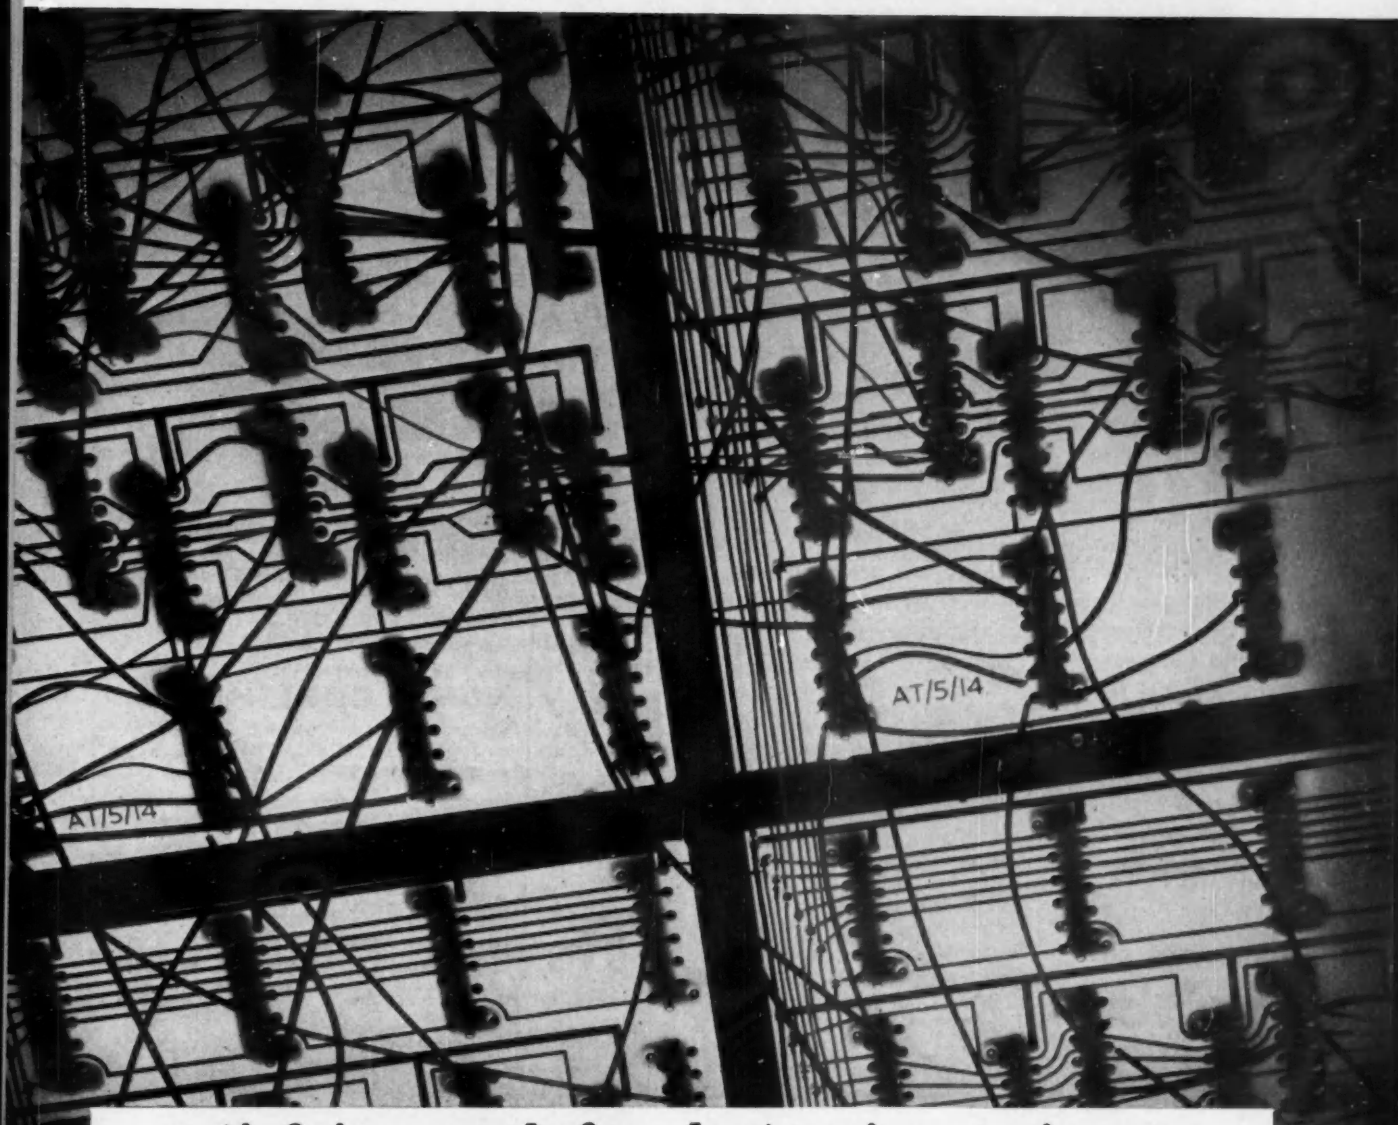

satisfying work for electronics engineers

First-class research jobs for ambitious electronics engineers are always arising in this fast-expanding company. The salaries are excellent — the prospects outstanding.

You may find one of these jobs to your liking now. According to your qualifications and experience you might fit in immediately as a group leader — with ample opportunity to develop your own ideas within the existing field of work.

Promotion with us can be rapid—and is based on the results of individual merit and achievement alone.

Every facility for creative research is available in our well-equipped, modern laboratories at Stevenage. Groups are kept small and their work specialised. The terms and conditions of employment are good; the positions are pensionable, and help with housing can be arranged.

We are always willing to hear from you. Why not write to the Manager, Training and Personnel Division, The British Tabulating Machine Co. Ltd., 17 Park Lane, London W.1.

Hollerith Electronic Computers

AN EXPANDING PROFESSION

At one time Electrical Engineering was a fairly well-defined profession, but so rapidly has it developed that, today, an electrical engineer can be a specialist in any one of a wide variety of related fields.

The more progressive the organisation the more does this apply and in many ways the range of its activities is a measure of a Company's power and stature in the industrial world of today—
—and of tomorrow.

The English Electric Group covers all these fields and within the Aircraft Division, as part of a long term expansion policy, can be found important opportunities for experienced men in:—

Aircraft Electrical Design

Electrical Laboratory Engineering

Technical Authorship—Electrical Electronics

Flight Test Electrical Engineers

Electrical Systems Engineering

Project Design Office

If you are qualified and have sound experience in electrical engineering, and would like to take up an appointment which gives you the opportunity to acquire specialist knowledge and experience in any of the above branches of the profession, write to:—

Dept. C.P.S. 336/7 Strand, London, W.C.2.

Quoting reference EE 1718A.

DO YOU WANT A

new job

In which there will be interesting problems to solve—to work in a team engaged on High Precision Instruments for Missile Engineering?

If so there are vacancies for all grades of

DEVELOPMENT ENGINEERS
DESIGNERS
DRAUGHTSMEN (SENIOR & JUNIOR)
TRACERS

If you have had design experience on the lighter type of Mechanical or Electrical Mechanisms have some qualification then we shall be pleased to hear from you. For further details ring Bramhall 1620, Extension 17, INSTRUMENT COMPONENTS, or write to Mr. W. Clover, *Personnel Department,*

A. V. ROE & CO. LIMITED

Weapons Research Division, Woodford, Cheshire, mark letter INSTRUMENT COMPONENTS and quote Reference WRD/IC/R.129/E

SENIOR AND JUNIOR

SYSTEMS ENGINEERS

required

These posts offer excellent scope for candidates with originality of thought in the field of Autopilot design, Engine Control and other complex systems concerned with automatic control of civil and military aircraft.

Senior Engineers should be of degree standard with minimum of five years' experience of servo-mechanism, electronic and electromechanical devices. Proven ability and considerable experience in a responsible position will be accepted in lieu of academic qualifications.

Junior Engineers should have a degree, H.N.C. or equivalent qualifications, together with two or three years' experience of electronic and electromechanical systems.

Salaries commensurate with qualifications, experience and achievement.

Write for application form to Personnel Manager,

SMITHS AIRCRAFT INSTRUMENTS

Bishops Cleeve, Nr. Cheltenham

quoting reference: E.E.6

Career opportunities in industrial electronic control

A career with a difference awaits you with Britain's leading manufacturers of *industrial* electronic equipment. Be in the forefront of the drive to supply industry with the automatic control equipment for the needs of today — and tomorrow!

Positions at both senior and junior levels are available for :

- APPLICATION ENGINEERS
- SALES ENGINEERS
- TECHNICAL WRITERS
- DESIGN ENGINEERS
- DEVELOPMENT ENGINEERS
- SERVICE ENGINEERS
- TEST ENGINEERS
- DRAUGHTSMEN

Apply to Reference FDA at the address below

Equipment currently produced and under continuing development includes; control equipment for electrical machines of all types, specialised drives, regulators, machine tool controls, servo amplifiers and systems, process control equipment, photo-electric equipment, resistance welding controls, computer power supplies, protective and supervisory equipment and a wide range of specialised equipment to meet specific industrial requirements.

Special opportunities for engineers having application experience in the industrial electronic control equipment field, for customer liaison activities. Applications welcomed from engineers having specialised experience in one field, e.g., resistance welding or machine tool control.

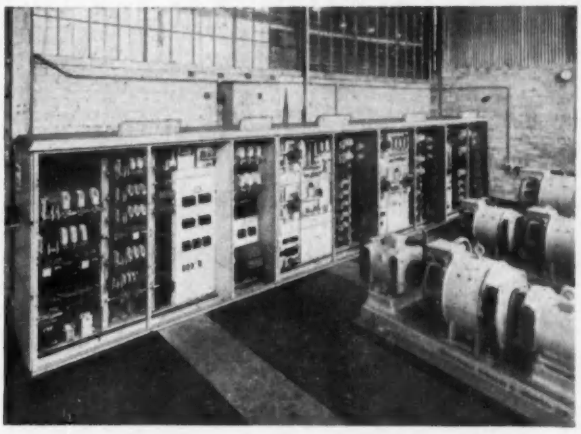

LANCASHIRE DYNAMO ELECTRONIC PRODUCTS LTD

ELECTRONIC BEP EQUIPMENT

RUGELEY, STAFFORDSHIRE, ENGLAND

Manufacturers of Britain's widest range of industrial electronic equipment

A Member of the Lancashire Dynamo Group

SPERRY GYROSCOPE CO., LTD

require

ELECTRICAL, ELECTRONIC & MECHANICAL
DESIGN AND DEVELOPMENT ENGINEERS
DRAUGHTSMEN
DEVELOPMENT ASSISTANTS

for vacancies in the design and development of:—

INDUSTRIAL PROCESS EQUIPMENT
MARINE NAVIGATIONAL AIDS AND AUTO-PILOTS
AERO INSTRUMENTS AND FLYING CONTROLS
GUIDED WEAPON COMPONENTS AND CONTROL SYSTEMS

Applications, or requests for further information, are invited from Engineers and Physicists with an Hons. Degree or equivalent for senior and intermediate level posts and those who have H.N.C. or O.N.C. for Assistant and Drawing Office Posts. The rewards are hard interesting work and a good salary reviewed annually. Posts based at Brentford, Middx., and Bracknell, Berks., a new town where housing is available in approved cases.

Write in confidence to **Mr. R. W. H. Lubbock, B.Sc., SPERRY GYROSCOPE CO. LTD., Bracknell, Berks.**

A. V. ROE & CO., LIMITED

WEAPONS RESEARCH DIVISION
(Guided Missiles)
WOODFORD, CHESHIRE

require

SENIOR DEVELOPMENT ENGINEERS

in their

Instrument Component Engineering Department for leading a team of Engineers in

1. The Development of precision measuring instruments for use in connection with Autopilots and Inertia Navigators.
2. The development of electrical and electronic equipment in association with Stable Platforms and Gyroscopic Test Gear.

Candidates for the above two posts should possess an Honours Degree or equivalent, together with a number of years' experience in the appropriate or allied fields.

The Division is situated within easy reach of Manchester and the Derbyshire hills, and the Company provides excellent canteen facilities and a superannuation scheme.

Applications to: The Chief Engineer,
A. V. ROE & CO. LIMITED,
Weapons Research Division,
Woodford, Cheshire.

Quoting Reference RHF/WRD/R.112/E.

SENIOR & JUNIOR

Electronic & Instrument Engineers

required by

expanding Division of

ELLIOTT BROS. (LONDON) LTD.

These posts involve responsibility for design of a wide variety of instruments and process control systems using analogue and digital techniques. They offer rewarding and progressive salaries and valuable experience in the field of industrial electronics. Pension Scheme. Please write fully to Personnel Officer, Century Works, Conington Road, Lewisham, S.E.13.

A. V. ROE & CO. LIMITED

WEAPONS RESEARCH DIVISION
(Guided Missiles)
WOODFORD, CHESHIRE
TRIALS DEPARTMENT

require three

ELECTRONIC TECHNICIANS

to take charge of technical teams working on Guided Missiles. Applicants should be prepared to work for short periods in Australia. Qualifications : H.N.C. or equivalent, and some relevant experience.

Applications to Personnel Manager,
A. V. ROE & CO. LIMITED
Greengate, Middleton, Manchester.
quoting reference WRD/BSB/R.130/E

FERRANTI LIMITED, EDINBURGH

require an

EXPERIENCED
ELECTRONIC ENGINEER

to undertake original work in connection with trials of high power microwave transmitting valves. Good facilities for the construction of specialised electronic equipment are available: the work could consist of —1. Design of equipment for specific test purposes. 2. Construction of high power supplies, including pulse modulators. 3. Supervision and maintenance of equipment in service. The post offers good prospects to an energetic man capable of applying original ideas to the problems involved, and also an opportunity to gain experience in the design and application of high-power microwave valves. An appropriate salary will be paid and there is a staff pension scheme in operation. Applications should be addressed to:-

The Personnel Officer,
Ferranti Limited,
Ferry Road, Edinburgh, 5,
quoting Ref. EE/VL/23.

ELECTRICAL ENGINEERS

An appointment is to be made to a Gyro Research Team of a qualified Electrical Engineer with experience in the design and development of small or miniature electromagnetic components such as synchronous motors, torque motors, and signal generators. Experience in the design of electronic test equipment would be an advantage.

The work will involve using the most modern material and techniques in the design and development of precision electromechanical devices, and their application to miniature gyroscopes and similar instruments.

Please write to the Personnel Manager (Ref: 689), ELLIOTT BROTHERS (LONDON) LIMITED, Borehamwood, Herts.

SOLARTRON

—SOLARTRON—

Senior Electronic Engineers

RADAR SIMULATOR

World demand for the Solartron Radar Simulator offers opportunities to outstanding Senior Engineers:

(a) to lead a project team engaged on technique and system design and development.

(b) to be responsible for customer liaison for design and quotation purposes. This will entail working closely with Project Leaders and interpreting their designs and specifications in lucid form to the customer.

Applicants should have experience in leadership and proven ability in design work of an advanced nature in any of the following fields—video circuitry, D.C. and A.C. Servos, Switching Circuits, Radar or similar systems.

The location of these appointments will be Farnborough, Hants.

Chief Electronic Engineer

SOLARTRON-RHEEM

We are seeking an outstanding chief electronic engineer with wide experience in leading research and development teams.

Initial activities include direction of some of the development activities of Solartron Electronic Business Machines Ltd., in particular co-ordination of development of products suitable for world markets under the sponsorship of Solartron Rheem Ltd., a company organised to provide joint U.K./U.S.A. sponsorship. Projects include specialised applications of analogue and digital techniques and character recognition.

This opportunity calls for considerable experience in the electronic data processing field in the broadest sense. Applicants should have a thorough knowledge of basic physical theory in the electronic, optical and mechanical fields, and mathematical ability either in the field of analysis and transforms or of logical algebra. Proven ability in making an original contribution to the conception and design of new products and in electronic circuit design is essential.

To a man already earning at least £2,000 per annum this appointment offers unusual scope, and in due course, the opportunity to play a leading part in making policy decisions.

Apply to : Group Personnel Officer,

THE SOLARTRON ELECTRONIC GROUP LIMITED

Thames Ditton, Surrey

FERRANTI LIMITED, EDINBURGH

invite applications for the following Staff appointments in their Trials Division:

1. **FIELD TRIAL ENGINEERS** to lead small teams that will be engaged on field evaluation trials of an experimental CW radar installation.
2. **FIELD TRIAL ENGINEERS** to join a team engaged in the field trials of experimental airborne radar and fire control systems.
3. **LIAISON ENGINEER** to assist in the introduction of fire control systems to aircraft manufacturers and the services.

For posts 1 and 2 applicants should possess Higher National Certificate in Electrical or Electronic Engineering or suitable equivalent and have had at least 3 years experience in radar systems.
For post 3 applicants should possess a Higher National Certificate or equivalent and have had at least 3 years experience in gyro instruments and electronics. A junior Naval or Air Force Technical Officer might suit. Although primarily based at Edinburgh these posts will require applicants to travel within the United Kingdom. Please send full particulars of experience and qualifications to the—

PERSONNEL OFFICER, FERRANTI LTD., FERRY ROAD, EDINBURGH, 5,—quoting ref. TID/23

A well established and prosperous

PUBLIC COMPANY

well known in the electronic world wishes to expand the scope of its activities and

IS PREPARED TO ACQUIRE THE SHARE CAPITAL

of a substantial profit-earning concern in the electrical and electronic industry. Located in Greater London area, Home or Southern Counties. The arrangements envisaged would safeguard

AND RETAIN THE EXISTING MANAGEMENT

on a salary and profits basis secured by contracts of service. Write Box A.181

C/O STREETS, 110 OLD BROAD ST. E.C.2.

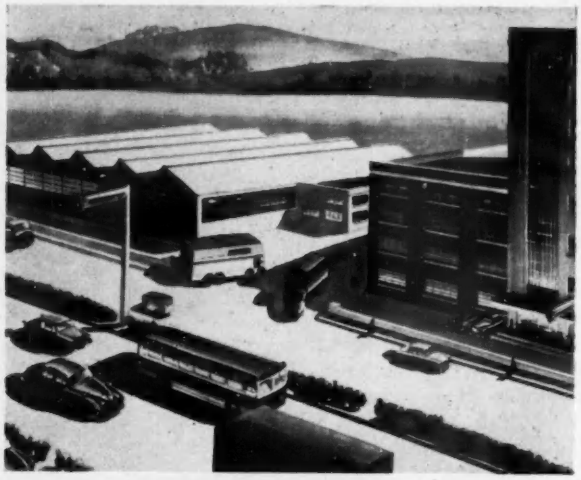

SPACE

FOR GROWING INDUSTRIES

Is your factory old, inconvenient, too small, its lease running out?

Are you short of workers, and are those you have badly housed, tired of long journeys and loss of time whenever there is a traffic hold-up?

HAVERHILL or THETFORD

SUFFOLK NORFOLK

OFFER YOU

- SITES for FACTORIES with all services
- NEW HOUSES for your workers
- LABOUR available through a selective recruitment scheme

WHAT ARE YOUR DIFFICULTIES?

Disposing of your existing premises? Lack of sufficient capital for new building?

PERHAPS WE CAN HELP OR ADVISE YOU!

The London County Council in co-operation with these towns has set up an Industrial Centre at the County Hall, S.E.1, to deal with London industrialists. Write (ref. VA/G/5) or telephone for more information or an appointment—WATerloo 5000, Extension 7494 and 7595.

PRESS TOOLS STAMPINGS

JIGS, FIXTURES, PRESSURE DIES, GENERAL MACHINING, JIG BORING, PRESS WORK, ETC.

Please send your enquiries to

THE MIDDLETON TOOL & ENG. Co LTD
ALEXANDRA RD. PONDERS END. MIDDX.
Telephone HOWard 2252 (3/4

INSTRUMENTS FOR RESEARCH AND PRODUCTION

With the combination

MEGOHMMETER - TYPE 2423

and High Tension Accessory Type 3423 it is possible to measure insulation resistances up to

100 Million Megohms

Due to the principle of operation, which is that of a d.c. amplifier, not only **insulation resistances**

but **d.c. voltages**

and **extremely small d.c. currents**

can also be measured

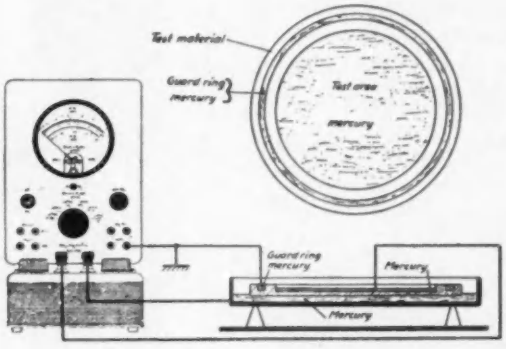

The Megohmmeter Type 2423 contains a mains derived stabilized voltage supply of 10 and 100 Volts, for the measurement of insulation resistances up to 10^{13} ohms.

The High Tension Accessory Type 3423 contains 34 batteries of the type normally used in hearing aids, i.e. with a voltage of 30 Volts each.

This Accessory thus extends the measuring range of the Megohmmeter to measurements of insulation resistance values as high as 10^{14} ohms at a test voltage of 1 000 Volts.

To avoid the undesirable effects of leakage currents at high test voltages the use of a guard-ring is recommended. An example of a measuring system which can be employed is shown above.

Measuring ranges for the Megohmmeter Type 2423 with the High Tension Accessory Type 3423:

To enable a quick charging of high-capacity cables or capacitors the terminals marked "Key 1 V" can be short-circuited. The charging time will then be determined exclusively by the time constant of the test-object itself.

Resistance Measurements:
0.1 MΩ to 100 000 000 MΩ
Voltage Measurements (Full scale deflection):
1 Volt to 1 000 Volts
Current Measurements (Full scale deflection):
10^{-9} to 10^{-4} Amperes
Input Impedance:
100 MΩ across terminals marked "Volts"
With range selector in position "1 V Key" the input impedance across the terminals marked "Key 1 V" is 1 000 MΩ.

B K **Brüel & Kjær**

Adr.: NÆRUM, DENMARK · Telepn.: NÆRUM 800500 Cable: BRUKJA, COPENHAGEN

SALES AND SERVICE: B & K Laboratories, 59 Union Street, LONDON S. E. 1.

BRÜEL & KJÆR · DENMARK · BRÜEL & KJÆR · DENMARK · BRÜEL & KJÆR · DENMARK · BRÜEL & KJÆR · DENMARK · BRÜEL

Prompt delivery of your RELAY needs...



Miniature high speed sealed relay

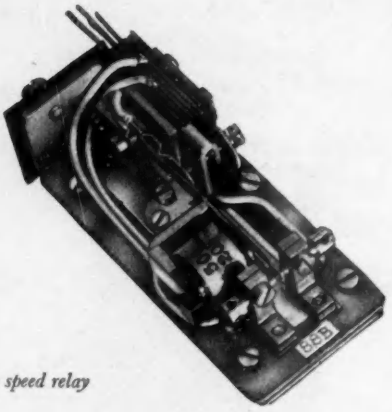

High speed relay

Relay for use in high voltage and high frequency circuits

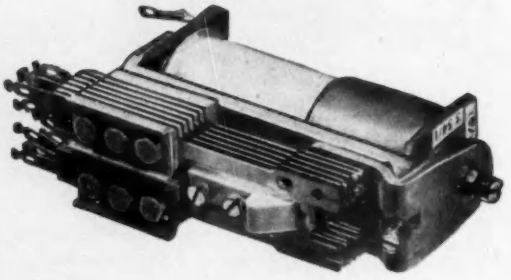

B.P.O. 3000 type relay

The versatility of the telephone type relay has led to its widespread use outside the telephone industry. Our Woolwich Works developed the original BPO 3000 type relay which has since won world renown. With unrivalled experience in the design of relays for a wide variety of special applications, our engineers can give individual attention to problems in this field. **Prototypes can be delivered almost immediately, with bulk supplies following in quick succession.** We would welcome your enquiries.

SIEMENS EDISWAN

SIEMENS EDISON SWAN LTD
An A.E.I. Company
Woolwich, London S.E.18
Telephone: Woolwich 2020 Extn. 621

TAB 306

A revolution in Oscillographs

The Mingograph 230B permits direct recordings to be obtained of approximately ten times greater frequency range than has previously been possible. It is an outstanding advance in the field of scientific and industrial measuring instruments.

MINGOGRAPH 230B

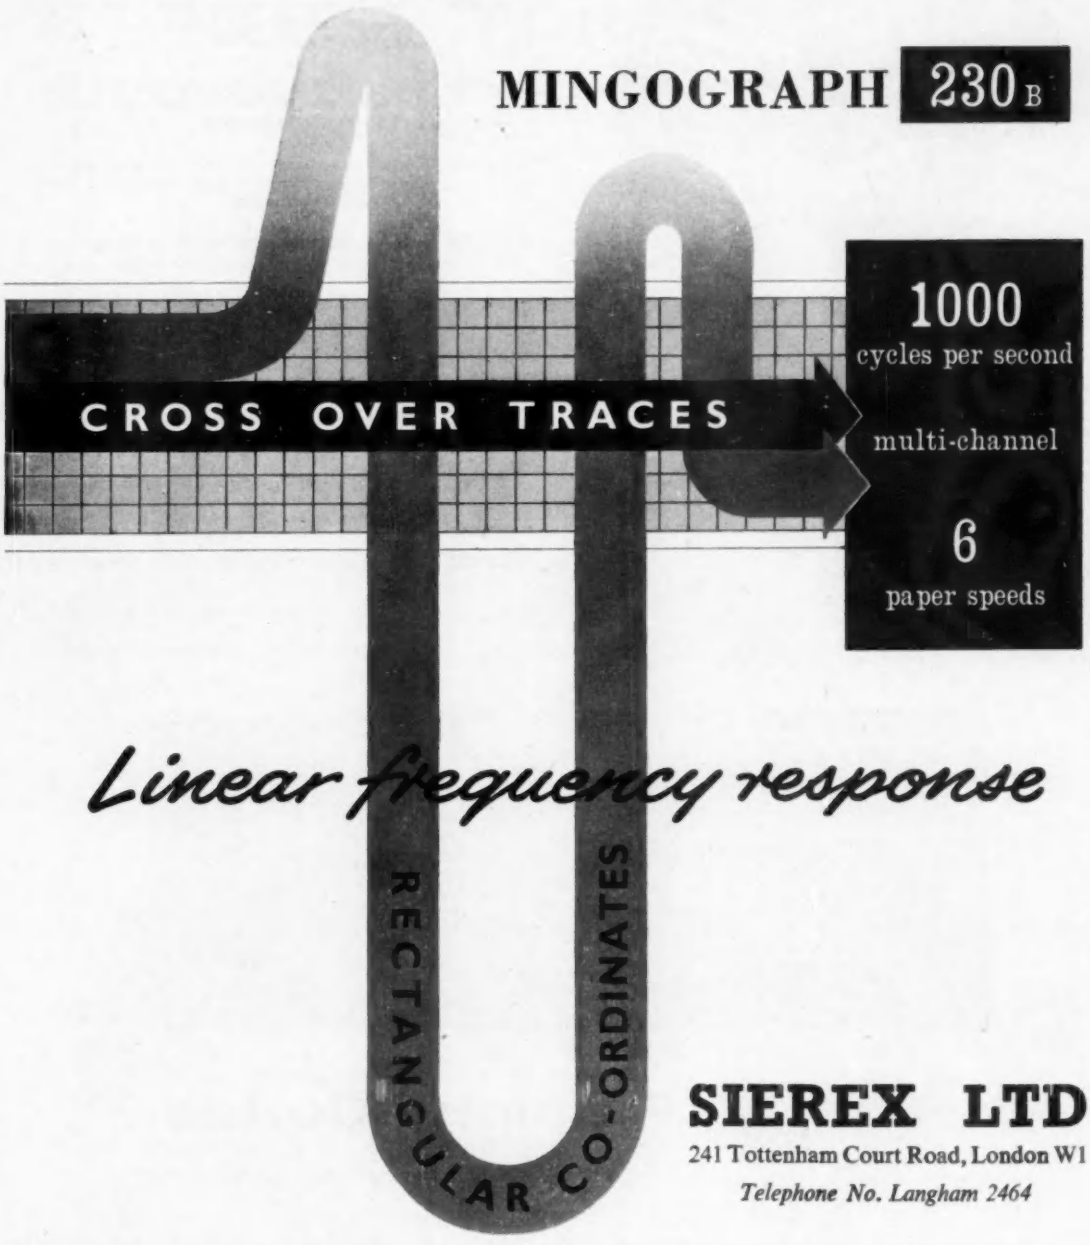

Linear frequency response

SIEREX LTD

241 Tottenham Court Road, London W1

Telephone No. Langham 2464

"MULTICON" PLUGS AND SOCKETS

The full range consists of 2, 4, 6, 8, 10, 12, 18, 24 and 33-pole sizes. Illustrated is the 24-pole size.

Working voltage: 1,000 volts D.C. or A.C. (peak) or 500 volts D.C. or A.C. (peak) in tropical use.

Current rating: 5 amps. D.C. or A.C. (R.M.S.) per contact.

Average contact resistance: below 0·002 ohms.

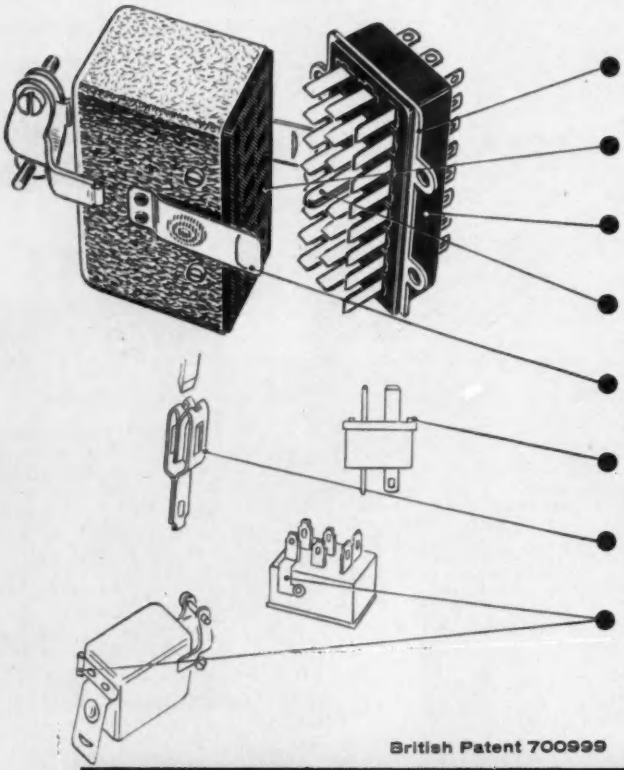

- Metal flanges moulded into the body to ensure flush mounting and to avoid alignment difficulties.
- Terminal numbering moulded into plug and socket bodies to facilitate wiring and cableform testing.
- Single-piece nylon-filled body mouldings provide high insulation and tracking resistance.
- Large pin locator contact facilitates engagement, especially in unitor applications.
- Optional vibration-proof retaining blades to secure the unit to panel or chassis.
- Four distance pips keep mating faces apart and eliminate moisture traps between plug and socket faces.
- Socket clips have split limbs with four areas in contact with each plug blade ensuring absolute reliability of contact.
- Earthing of plug or socket covers is achieved by either:

  internal connecting link from a contact to cover, OR

  rivetted earth tag to outside of cover.

British Patent 700999

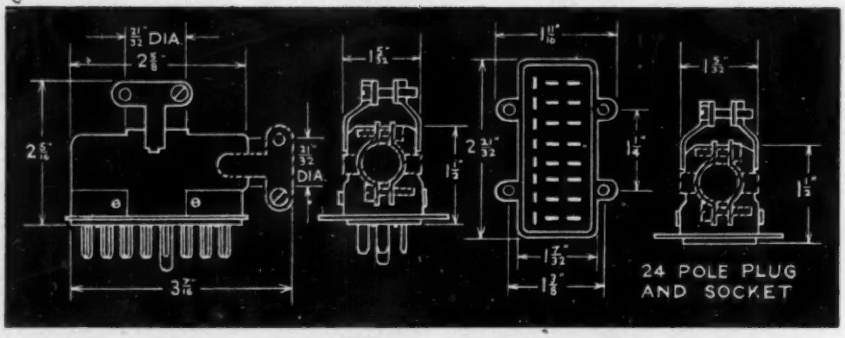

Write for full catalogue from

Painton & Co. Ltd.

KINGSTHORPE NORTHAMPTON

Tel: 32354-5-6 Telegrams: 'Ceil, Northampton'

Design Approved

X-BAND NOISE TUBE

Noise Power excluding image frequency contribution ..... 15·25 db

Operating Current..... 35 mA

Overall Length..... $6\frac{21}{32}$"

Base Diameter ..... 0·64"

Discharge Tube Diameter ..... 0·185"

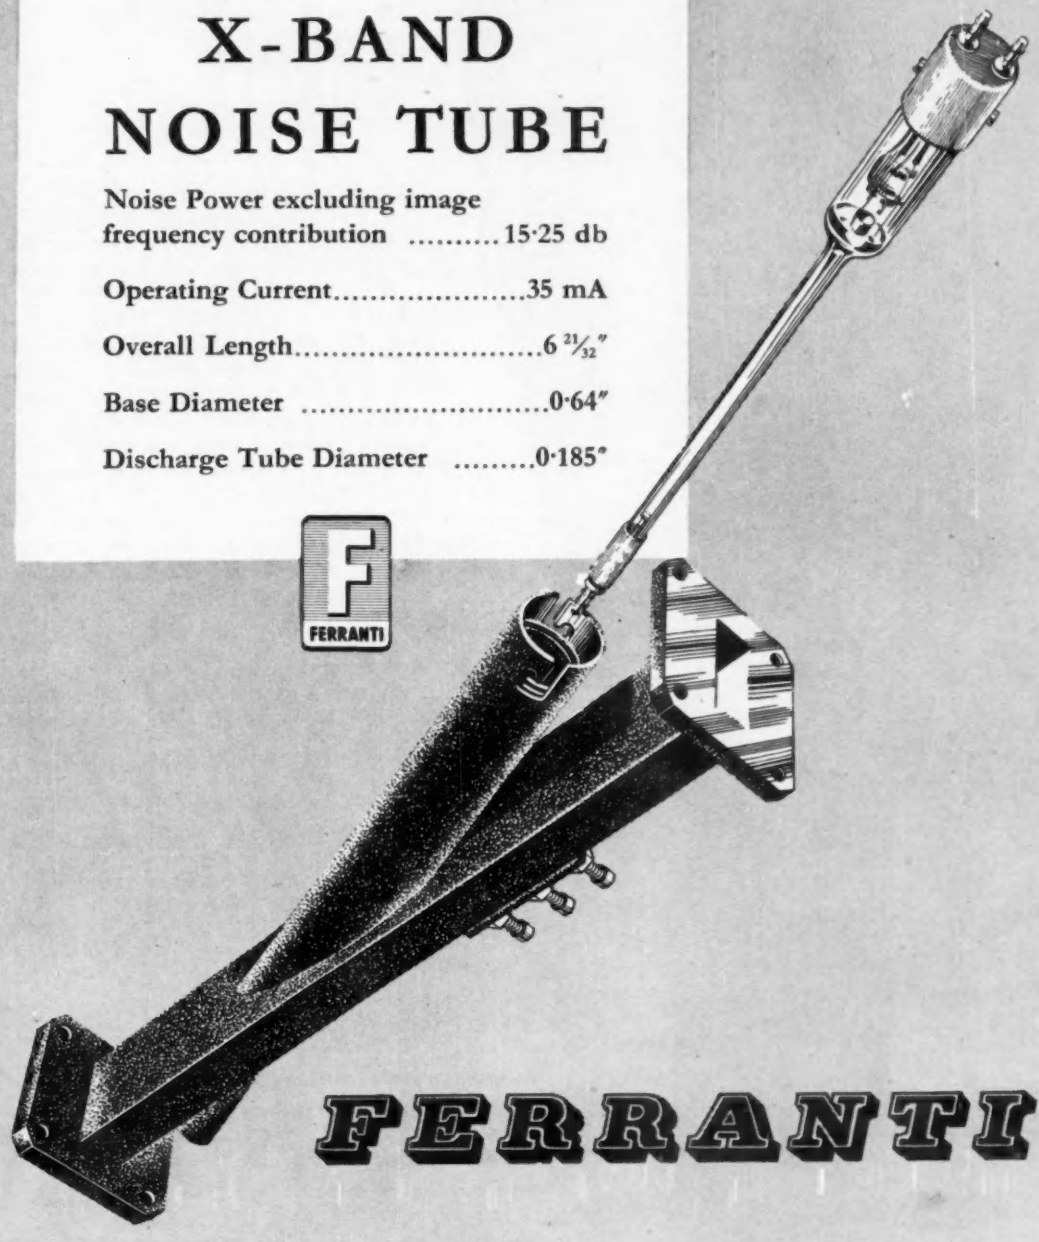

FERRANTI

FERRANTI LTD. · FERRY ROAD · EDINBURGH 5 Tel. Granton 89181

ES/T38

5 inch High Precision Oscillograph Tube 5BKPI

Quantity production of the 5BKP1 by ETEL is making it an economic proposition for more designers to incorporate a high precision oscillograph tube in a wider range of applications than has previously been possible.

This five-inch tube employs a two-stage distributed post deflection accelerator. High P.D.A. ratios may be used, and the distortions caused in normal P.D.A. systems largely eliminated, with consequent advantages in brightness and deflection sensitivity.

With a P.D.A. ratio of 5½:1 the maximum pattern distortion is 2% and the maximum deviation from deflection linearity is 2%.

As can be seen from the adjacent data, the 5BKP1, with its high sensitivity and low plate input capacitances is specially suitable for wide-bandwidth oscillography.

Full data is available on request.

Abridged data

Screen Metal backed P1 green fluorescent medium persistence. Other screens available to order.

Heater Vh = 6.3V • Ih = 0.55A

Capacitances x' to x" . . . . . 2.3pF • y' to y" 1.7pF
One x plate to all other electrodes less other x plate 3.6pF
One y plate to all other electrodes less other y plate 1.65pF

Typical Operation

Va1	1400	V
Va2	440 to 560	V
Va3	1800	V
Va4	4000	V
Va5	10,000	V
Vg	–45 to –90	V
Sx	26.5	V/cm
Sy	12.5	V/cm

ETEL

Cathode Ray Tubes

ELECTRONIC TUBES LIMITED

Kingsmead Works, High Wycombe, Bucks · Telephone : High Wycombe 2020

ETL2

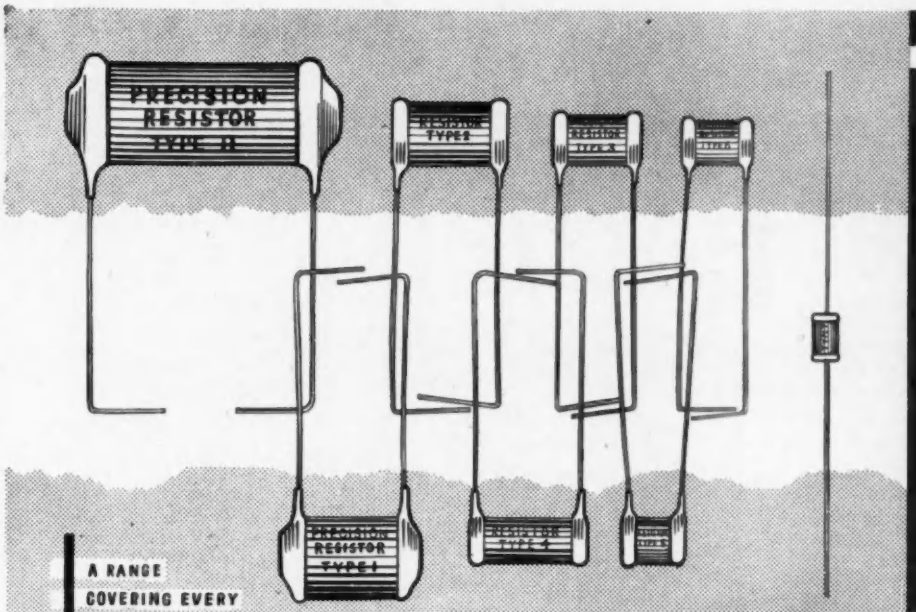

the Rivlin Range of Eight

A RANGE COVERING EVERY REQUIREMENT PLUS SPECIAL TYPES TO YOUR PARTICULAR NEED

- *Accuracy up to ±0.1 per cent or ±0.01 Ω whichever is the greater.*
- *All values available in the range 0.1 Ω to 3 Megohms with a temperature coefficient of 0.002 per cent °C.*
- *Standard ratings: ⅛W, ¼W, ½W, ¾W, 1W, 2W. and 3W.*
- *Low-Inductance windings available in most sizes*

The Rivlin range of eight precision wirewound resistors, from ⅛w to 3w, now covers most normal requirements. Additionally special types, higher ratings and American equivalents can be supplied to order. Skilled design and the highest standards of craftsmanship in production combine to give Rivlin their firm reputation for making precision resistors that are without equal. Add to these the fact that the name Rivlin is a byword for personal service and quick delivery, and you have the reason for which Rivlin describe themselves and their products as 'the OHM of Reliability'.

RIVLIN—
The 'OHM' of Reliability



RIVLIN PRECISION WIREWOUND RESISTORS

RIVLIN INSTRUMENTS LIMITED
DOMAN ROAD, CAMBERLEY, SURREY
***Telephone:* CAMBERLEY 2507/8**
***London Office:* Tel. Swiss Cottage 3038**

RIVLIN

INSTRUMENTS LIMITED
ELECTRONIC ENGINEERS

MUTUAL & SELF INDUCTANCE BRIDGE

Designed for the accurate measurement of either mutual or self inductance and resistance in the range 0·001μH to 30mH and 100μΩ to 3000Ω respectively.

All measurements are made in the form of a four-terminal network and inductance and resistance of leads and clips are not included in the measurement.

Accuracy within ± 1% frequency 1592c/s ($\omega = 10\,000$)

Full technical information on this and other 'Cintel' Bridges is available on request.

CINEMA TELEVISION LTD

A COMPANY WITHIN THE RANK ORGANISATION LIMITED

WORSLEY BRIDGE ROAD · LONDON · S.E.26
HITHER GREEN 4600

SALES AND SERVICING AGENTS:
Hawnt & Co. Ltd., 59 Moor St., Birmingham 4
Atkins, Robertson & Whiteford Ltd., Industrial Estate, Thornliebank, Glasgow
McKellen Automation Ltd., 122 Seymour Grove, Old Trafford, Manchester 16

BRIMAR 6T8

TRIPLE DIODE TRIODE

The Brimar 6T8 is a triple-diode-triode in which one diode has a separate cathode. The triode section has a high amplification factor making the valve suitable for use in AM/FM receivers in the demodulation and first stage audio circuits. The diodes may be used in series shunt limiter circuits, for example, in the audio sections of television and communications receivers, followed again by the triode section for A.F. amplification.

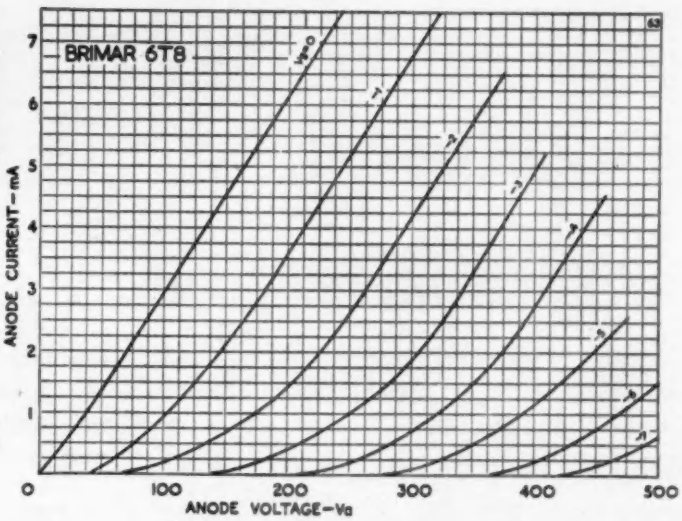

Near Equivalents
EABC80
DH719
6AK8

Typical Triode Operating Characteristics as an R.C. coupled amplifier.

Heater Voltage		6.3 volts
Heater Current		0.45 amp.
Anode Supply Voltage	250	250 volts
Anode Load Resistor	0.25	0.25 megohms
Grid Resistor	1.0	10 megohms
Cathode Bias Resistor	3	0 kilohms
Peak Output Voltage	43	40 volts
Stage Gain (for 24 V peak to peak output) ...	42	42
Distortion (for 24 V peak to peak output) ...	1	5%

Cut this out for further reference or write to the Publicity Department at Footscray for a data sheet.

Name .....

Address .....

EE

Standard Telephones and Cables Limited

Regd. Office : Connaught House, 63, Aldwych, London, W.C.2

FOOTSCRAY · SIDCUP · KENT · *FOOtscray 3333*

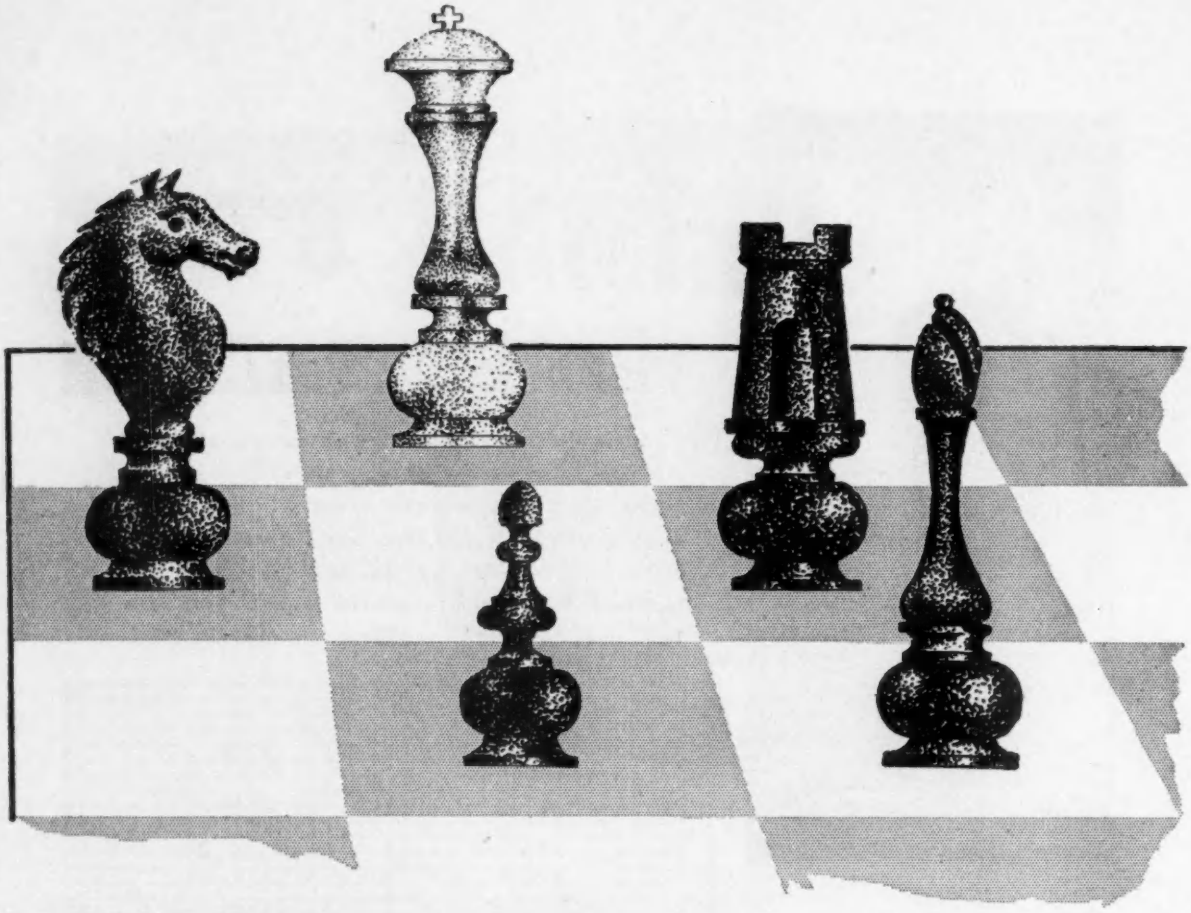

Your best move . . .

. . . when any problem appears on the board is to check with Brayhead. Whether your business is pressing (sorry!), components or springs, Brayhead can help you. The earlier any problem is started on, the better the chance of avoiding a stalemate — be it production, design or research; so move to B (Brayhead) and let them solve it for you!

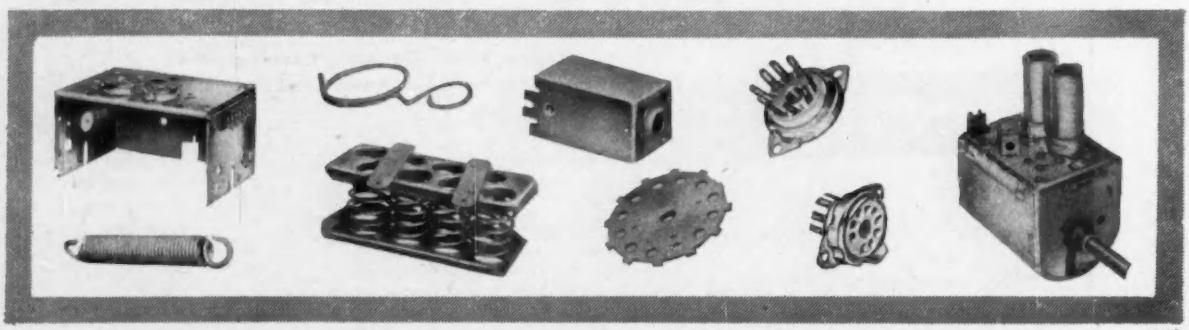

B36

BRAYHEAD (ASCOT) LTD.

FULL VIEW WORKS • KENNEL RIDE • ASCOT • BERKS

Telephone: Winkfield Row 427/8 or Ascot 1907/8/9

Telegrams: Brayhead Ascot

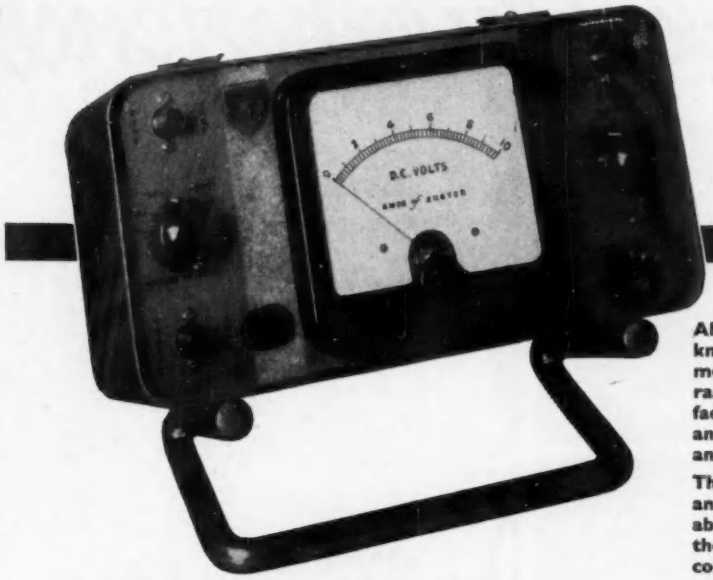

a test of accuracy...

AMOS of Exeter Limited have long been well-known for their design and prototype development work on special transformers. This new range of test instruments, developed and manufactured to rigid specifications, provide accurate answers to vital circuitry testing on the bench and for outside service work.

The Model 140 Transistorised D.C. Voltmeter is an entirely new class of instrument, incomparable with any conventional meter. It combines the high impedance input and minute current consumption characteristics of the valve voltmeter with a useful range of measurement extending from 50 mV to 20,000 volts.

It is the most complete and versatile D.C. voltmeter commercially available, is fully portable, independent of mains supply and more robust in construction than the conventional valve operated electronic meter.

MODEL 140 TRANSISTORISED D.C. VOLTMETER

Six basic voltage ranges are provided, extended by the ÷2 push button to eleven ranges. The first four basic ranges, that is up to and including 1000v, have a sensitivity equivalent to 150,000 Ohms per volt while the additional ranges brought in by the push button have double this sensitivity (300,000 ohms per volt).

VOLTAGE RANGES

		Current drawn at F.S.D.
Range 1*	0.5v F.S.D. Usable from 50mV	3 μA
1	1v " " " 100mV	6 μA
2*	5v " " " 0.5v	3 μA
2	10v " " " 1v	6 μA
3*	50v " " " 5v	3 μA
3	100v " " " 10v	6 μA
4*	500v " " " 50v	3 μA
4	1000v " " " 100v	6 μA
5*	5000v " " " 500v	25 μA
5	10000v " " " 1000v	50 μA
6	20000v " " " 2000v	100 μA

* USE "÷ 2" BUTTON

INPUT RESISTANCE.

Range 1. 150,000 ohms. Range 3. 15 MEG. ohms. Range 5. 200 MEG. ohms.
2. 1.5 MEG. ohms. 4. 150 MEG. ohms. 6. 200 MEG. ohms.

ACCURACY: Better than 2% of all ranges.

ACCURACY OF INBUILT REFERENCE VOLTAGE: 1%.

STABILITY: Dependent on temperature variations but does not exceed 1% under bench conditions over a period of 2 hours. Correction by means of calibration control.

ZERO DRIFT: Nil.

OVERLOAD: The instrument is automatically protected against accidental overload.

A calibration control provides for the instrument being adjusted to the inbuilt reference voltage against which the meter is calibrated to an accuracy of 1%.

The instrument is presented in a steel case, attractively finished in 'hammerglow' green stoved enamel and provided with carrying handle.

Centre Zero facilities for voltage measurement and for use as a sensitive Galvanometer are provided.

MODEL 156 A.F. OUTPUT METER

A versatile high quality instrument suitable for the measurement of power output in radio and television receivers and high fidelity record reproducers, for the examination of frequency response in audio systems.

POWER RANGES: 10mW., 100mW., 1 watt. and 10 watts., also calibrated in dBs.

FREQUENCY RESPONSE 10 cps — 20KC/s ± .5dB.

The 10 watt input matching trasformer of grain oriented material together with non-inductive precision load resistors, provide matching to inputs of 3 ohms, 5 ohms, 7.5 ohms, 15 ohms and 600 ohms.

Full technical details and prices available from sole distributors

SOUNDRITE LIMITED, 82-83 New Bond Street, London, W.1

LEGation 3618

Agents for: Canada (Mechron Eng. Prod. Ltd.), Denmark (Ditz Schweitzer), Italy (Teleomnia S.R.L.), India (Damodar Maniar), New Zealand (W. G. Leatham Ltd.).

QUALITY *backed by experience*

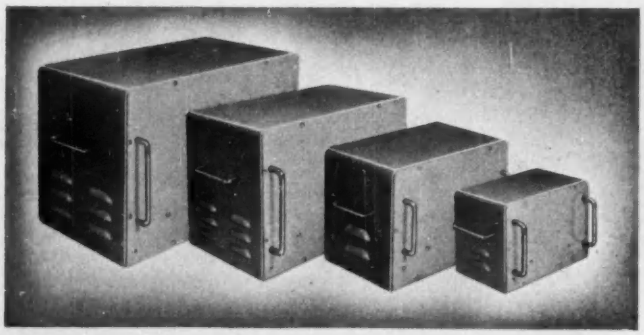

INSTRUMENT CASES

Attractively constructed of seam welded steel, these strong instrument cases are well ventilated and stove enamel finished in various colours. Available in four standard sizes or to your own specification.

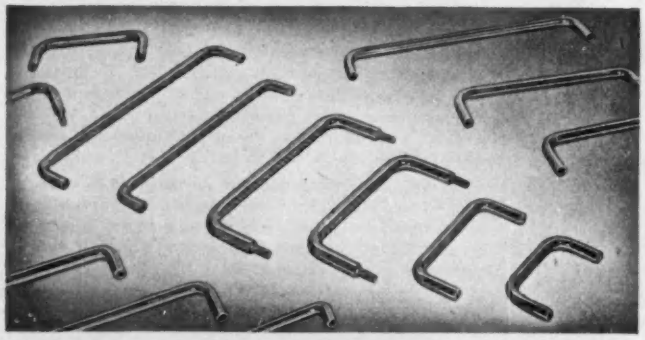

HANDLES

Made in standard range (4 in., 6 in., 8 in. and 10 in. centres). A wide variety of other sizes can be made to special order.

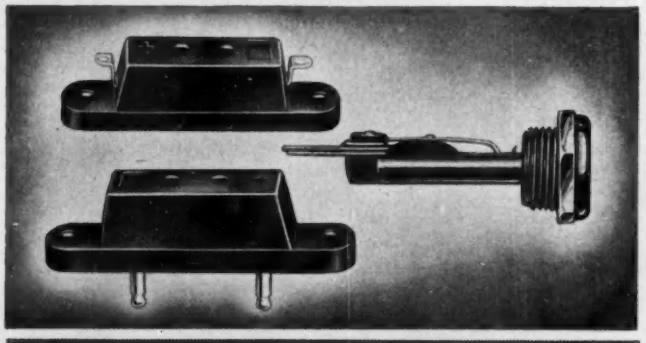

AMP-CHECKS

Invaluable device designed to facilitate current measurements. Installed in series with an electrical (or electronic) circuit to all points where measurements or checks are required without open circuiting.

Other products include
PULSE GENERATORS
CAPACITY COMPARATORS
TAPE RECORDERS
STABILISED POWER SUPPLIES
PHOTOCELL AMPLIFIERS

Metal components available to customers' specification and small or batch quantities undertaken.

Experienced in research projects and prototype construction.

SUB-CONTRACTORS for sheet metal or assembly and wiring.

AID and ARB approved.

PHILLIPS & BONSON LTD

Enquiries to : **POND WORKS 8 MILLFIELDS ROAD HACKNEY LONDON E5** *Telephone :* **AMHerst 4331**

Reg. Offices : IMPERIAL HOUSE DOMINION ST. MOORGATE LONDON EC2 *Telephone :* MONarch 5481-5

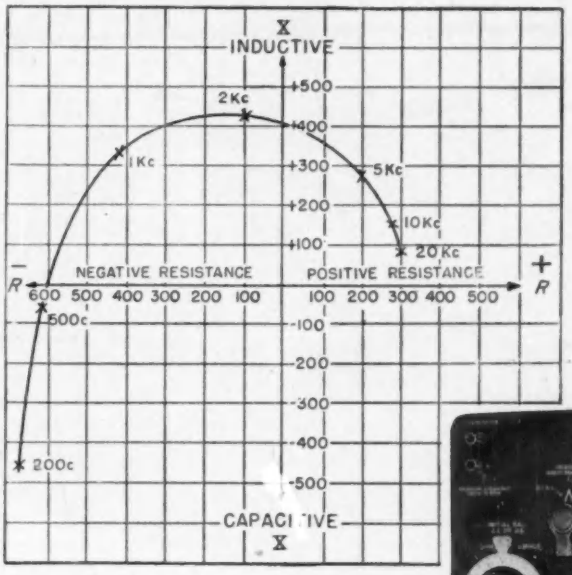

Impedance of Feedback Circuit . . . illustrates ability of the Z-Y Bridge to measure any impedance; quadrature components may be positive or negative, real or imaginary.

GENERAL RADIO COMPANY TRADE MARK

Type 1603-A Z-Y Bridge

Measures Any Impedance...

- From O to ∞ ohms
- Positive or Negative
- At Any Phase Angle
- Over 20-cps to 20-kc Range

The General Radio Z-Y Bridge measures impedances from short circuit to open circuit, at small or large phase angle. Quadrature components, R & X or G & B, are measured directly at calibrated 100c, 1-kc, and 10-kc bridge positions. Basic accuracy is 1% over most of this range.

The ability to measure impedances of any magnitude accurately with one instrument is an extremely valuable asset in many measurement situations. The Z-Y Bridge can be used for measuring conductivity of liquids, in dielectric cells as readily as it can be used for R-L-C component measurements in the laboratory or production-test department. It will measure open-circuit and short-circuit transformer parameters . . . impedances of batteries and electrolytic capacitors . . . characteristics of audio-transmission networks . . . impedance of electro-acoustic transducers . . . Q and resonant frequency of chokes . . . and impedances of feedback loops, since negative real parameters can be directly measured.

The Bridge also can be used to determine cable-fault locations and circular-arc plots of liquids or solids having lossy polarizations in the audio-frequency range. These are but a few of the countless applications for this unique and versatile device. *You name it — this Z-Y bridge can probably measure it.*

For complete information request a copy of the current "G.R." Catalogue "O" (258 pages), where data is given on pages 34/35.

Impedance and Admittance Range
R: ±1000 ohms G: ±1000 μmhos
X: ±1000 ohms B: ±1000 μmhos

Accuracy
R or G: $\pm(1\% + (2 \text{ ohm or } 2\ \mu\text{mho}))$
X or B: $\pm(1\% + (\frac{2f_o}{f} \text{ ohm or } \frac{2f_o}{f}\ \mu\text{mho}))$

f is operating frequency, f_o is frequency setting of panel selector switch

Impedances of less than 100Ω or (100 μmhos) can be measured on "Initial Balance" dials with considerably greater accuracy—
R or G: $\pm(1\% + (0.2 \text{ ohm or } 0.2\ \mu\text{mho}))$
X or B: $\pm(1\% + (\frac{0.2f_o}{f} \text{ ohm or } \frac{0.2f_o}{f}\ \mu\text{mho}))$

Frequency Range—20 cycles to 20 kc

Maximum Applied Voltage
130 volts, rms on bridge;
less than 32v on unknown

Accessories Recommended
"G.R." Type 1210-B Unit R-C Oscillator and
"G.R." Type 1212-A Unit Null Detector

Accessories Supplied
2 Shielded Cables for generator and detector

Dimensions—12½" x 13½" x 8½"

Net Weight—21½ lbs.

Type 1603-A Z-Y Bridge £222

Claude Lyons Ltd.

76 Oldhall Street Liverpool 3, Lancs.
Telephone: Central 4641/2

Valley Works, Ware Road, Hoddesdon, Herts.
Telephone: HODdesdon 3007-8-9

CL.45

extra safety on touchdown

dependability in the spin

Honeywell Micro Switches

The new Vickers Viscount . . . the latest Hoover Washing Machine/Spin Dryer . . . Honeywell Micro Switches are installed wherever dependability is vital. And they offer dependability *plus* . . . plus top precision, plus unique mechanical and electrical versatility. Honeywell's wide range offers users all the advantages of Micro Switches designed and manufactured to meet the most exacting requirements.

Exhaustive climatic and endurance tests

were passed — easily — by Honeywell Micro Switches before they were specified for the undercarriage of the new Vickers Viscount. The tests showed that the switches would withstand propeller slipstream, runway spray, and extremes of temperature, pressure, and humidity.

Minimum plunger movement . . . ultra small size

. . . a Honeywell Micro Switch meets all requirements of the motor controlling the Hoovermatic Spin Dryer. The Switch automatically switches off the motor when the lid is opened during the drying cycle.

WRITE OR SEND THE COUPON TODAY
Honeywell-Brown Ltd, Wadsworth Road, Perivale, Middlesex.

Please send items ticked EE

- Catalogue 62A — General Purpose Switches ☐
- Catalogue 74 — V3 Switches ☐
- Catalogue 75 — Sub Miniature Switches ☐
- Catalogue 83 — Industrial Enclosed Switches ☐
- Aircraft Switch Data Sheets ☐

NAME .....

APPOINTMENT .....

ADDRESS .....

.....

Expert engineering service available from offices in the principal cities of the United Kingdom and throughout the world.

Honeywell

First in Micro Switches

NAGARD OSCILLOSCOPES AND PULSE GENERATORS

are chosen by those who need accuracy with versatility in their aids for the exacting research of today and tomorrow.

AIRCRAFT · AUTOMATION · BALLISTICS · COMPUTERS · HYDRAULICS · MEDICAL AND PHYSIOLOGICAL . SERVO WORK · TELECOMMS · TELEMETRY · TRANSISTORS · VIBRATION · ZETA

From A to Z in up-to-date laboratories NAGARD is contributing to important advances in knowledge.

Used at Harwell for ZETA—DE103A C.R.O. with rise time of 0.035 μsec. Two equal and accurately comparable channels which do not interact.

MOST VERSATILE—DT103 C.R.O. for frequencies from D.C. to 100 Kc/s unique in having two equal channels each with sensitivity of 1cm/250μV and sweep times from 25 seconds to 40 μsecs accurate within 2 per cent.

NEW MODEL J103 designed for accurate transducer work over frequency range D.C. to 1 Mc/s with sensitivity of 1cm/1mV.

. . . . . .

FOUR CHANNEL C.R. DISPLAYS are available by using the **UNITEL** modular system of instruments in co-operative assemblies.
The high sensitivity characteristics of the NAGARD D.C. **AMPLIFIERS** are available up to 2 Mc/s enabling the use of a wide variety of transducer equipment.

. . . . . .

SQUARE PULSE GENERATORS—Models 5001 and 5002. An exceptionally wide range of 10,000,000 to 1 in variation of pulse width and delay is covered with an internal rate generator up to 1 Mc/s and accurate output potentials from 20mV to 50V.

A rise time of 10 mμsec is consistently available over the lower voltage ranges. Model 5001 has a single pulse output—Model 5002 produces two consecutive pulses.

. . . . . .

PROCESS TIME CONTROLLERS—These are available in five ranges covering 11, 55 or 110 seconds and 5 or 10 minutes, each range is divided into 100 steps and is calibrated within 2 per cent. Stabilised against mains variations.
Accurate for the laboratory—Reliable for industrial control—Versatile for many timing operations.

Progress

Responsive to the rapidly advancing needs of our customers, we have ourselves built and equipped a new development laboratory, where intensive work is going on to perfect instruments of the most advanced design.

Our factory has been reorganised and enlarged to produce them.

Examples of some of these new instruments can be seen at the Physical Society and I.E.A. Exhibitions.

NAGARD LTD

18 AVENUE ROAD · BELMONT · SURREY
VIGilant 9161-2.

DE 103A



UNITEL

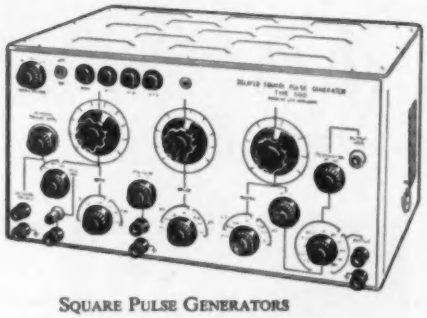

SQUARE PULSE GENERATORS



PROCESS TIME CONTROLLERS

Pocket size...

pocket wise!

This sturdy multi-range test meter is remarkable for the wide range of test facilities which have been so neatly incorporated. Full advantage has been taken of printed resistor techniques to produce a compact instrument of low weight.

Printed resistance panel for universal meter shunt.

Composite printed resistors and auxiliary switch.

Meter movement is enclosed to give protection against the infiltration of dust.

Robust range switch similar to that used in the famous Avo-Meter. Eighteen fixed silver-plated contacts embedded in a ring of high-grade moulding material are swept by a double contact rotor arm.

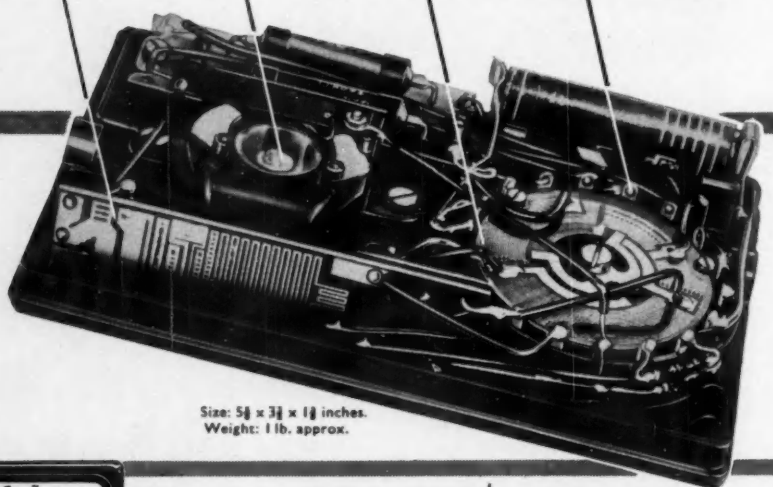

AVO

Regd. Trade Mark.

Size: 5⅝ x 3¼ x 1⅞ inches.
Weight: 1 lb. approx.



7 D.C. Voltage Ranges: 0-1,000 V.

5 A.C. Voltage Ranges: 0-1,000 V.

5 D.C. Current Ranges: 0-1A

2 Resistance Ranges: 0-20,000Ω. 0-2MΩ.

Sensitivity:
10,000Ω/V on D.C. voltage ranges.
1,000Ω/V on A.C. voltage ranges.

Accuracy:
3% of full scale value on D.C.
4% of full scale value on A.C.

For a small additional charge, instruments can be supplied to a higher degree of accuracy.

THE
MULTIMINOR

List Price:

19 Ranges · Single Knob Control · £9:10s.

Complete with test leads and clips. Leather case if required 32/6.

● **Write for fully descriptive leaflet.**

AVO Ltd. AVOCET HOUSE · 92-96 VAUXHALL BRIDGE ROAD · LONDON · S.W.1.

VICtoria 3404 (9 lines)

Illustrated is the HM 10. Helical Membrane Cable, which has a power handling capacity of 20 kW at 100 Mc/s.

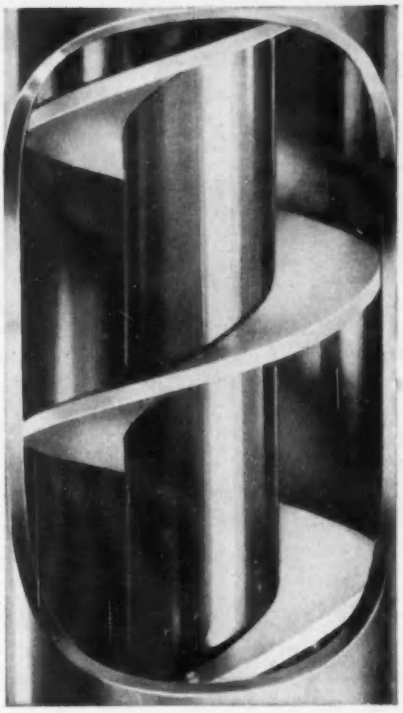

Many well known companies in the field of electronics have turned to Telcon for advice on the all important applications of Cables for Telecommunications.

The knowledge and experience of Telcon staff—scientists, research engineers, chemists, cable designers and technicians, which has been gained in all parts of the world, is always at the service of cable users and equipment designers.

The Telcon Contracts Department is organised to supervise or undertake the installation of any of the more highly specialised types of cable manufactured. Its services are particularly valuable in cases where unfamiliar techniques are involved.

Cables specially designed for Telecommunications

Coaxial and balanced pair cables for telephonic communications are in standard production, as well as very low loss Helical Membrane Cables, for Multi-channel Radio links and Television Transmitting Feeders, etc.

You are welcome to full details and specifications of any of these types. When writing please quote reference EE.

TELCON CABLES

THE TELEGRAPH CONSTRUCTION AND MAINTENANCE CO. LTD.

Enquiries to:— Sales Division, Mercury House, Theobald's Road, London, W.C.1. Telephone: Holborn 8711

Branches at: Cardiff, Dudley, Manchester, Newcastle, Nottingham.

An Audio Frequency Cable for local distribution purposes. These types can be installed underground, overhead or underwater, as required.

It is essential to know–
HOW LONG MACHINES WORK
HOW MUCH MACHINES EARN

This completely new

ELAPSED TIME METER

will save you time and money

It will give you—

Operating times
Shut-down periods
Total operating life of machines or tools
Correct times for inspecting and servicing machines

These ELAPSED TIME METERS are designed to record the length of time that an electrical circuit or machine has been running.
Modern industrial methods require that a record be kept of the length of time machinery and electronic equipment is used in order that proper servicing and maintenance is carried out and component life determined. The new ELAPSED TIME METER is ideal for this purpose.

This ELAPSED TIME METER is one of a series of completely new electro-magnetic counters now in production.

Write for full details

TYPICAL APPLICATIONS

ELECTRONIC EQUIPMENT
MACHINE TOOLS
TELEVISION EQUIPMENT
POWER PRESSES
GENERATING EQUIPMENT
RADIO EQUIPMENT
MOULDING MACHINES
WELDING MACHINES
COMPONENT LIFE

Counting Instruments Ltd

COUNTING INSTRUMENTS LTD.
5 ELSTREE WAY, BOREHAM WOOD, HERTS.
Telephone: ELStree 1382 (4 lines)

Top level achievement in UHF equipment

That both the Royal Navy and the Royal Air Force have already accepted UHF by Plessey as standard equipment, bespeaks well its advanced conception and practicability. It has been adopted as standard equipment by the British Services for ground-to-air and ship-to-air communications and is now in large scale production. In addition it can be used for point-to-point, ship-to-ship, and ship-to-shore working.

This new UHF radio telephone communication equipment provides 1750 channels in the range 225/399·9 Mc/s and is available in single or multi-channel versions for Air Force ground stations and in special cabinets for ship fitting.

An outstanding feature of this system is that many of its sub-units are common to, and interchangeable with, several versions of the equipment. This Plessey UHF equipment will operate with any standard UHF Airborne sets currently in use or envisaged for NATO Forces.

Remote control facilities can be provided for either land or shipborne use.

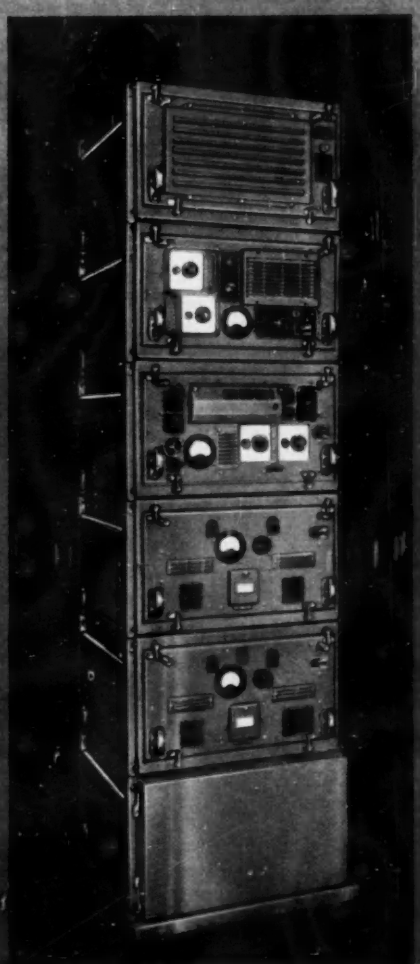

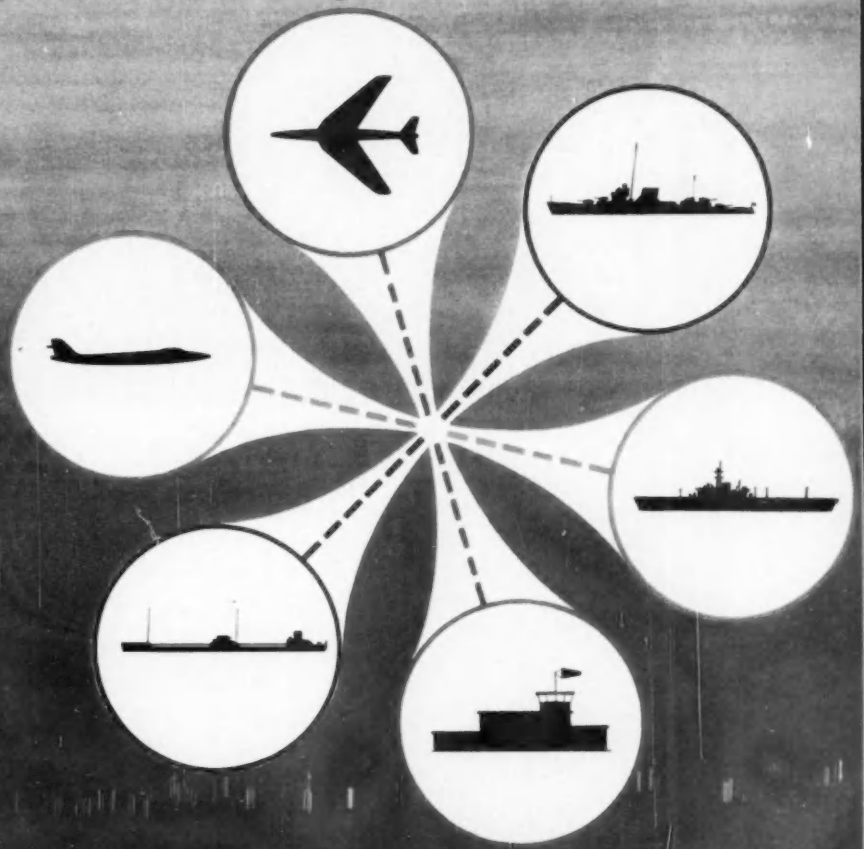

Plessey

ELECTRONIC AND EQUIPMENT GROUP - Ilford - Essex

Overseas Sales Organisation: PLESSEY INTERNATIONAL LIMITED · ILFORD · ESSEX · ENGLAND

ELECTRONIC BRAIN WAVE-

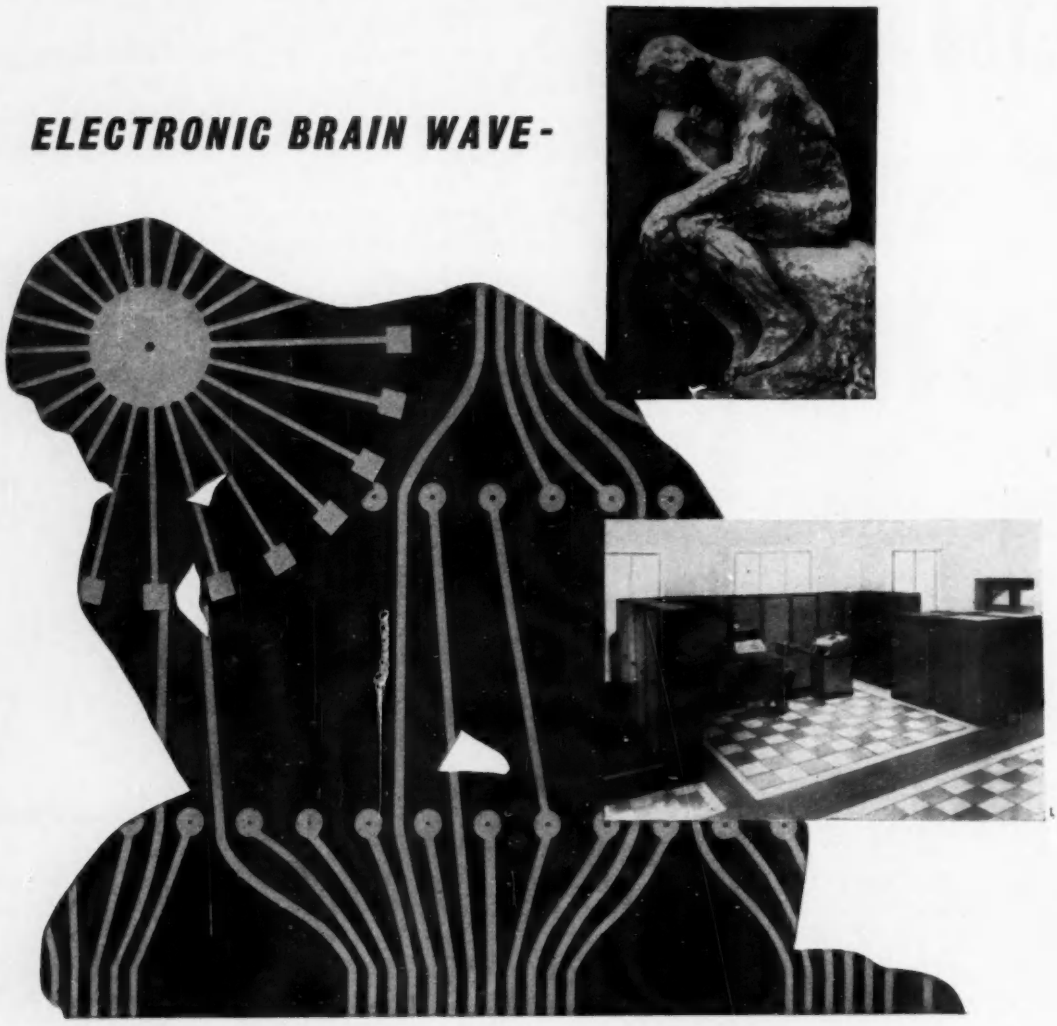

with BAKELITE Copper-Clad Laminated

REGD. TRADE MARK.

The Ferranti Mercury Computer, an immensely powerful machine of enormous capacity, is exceptionally fast and provides facilities for the most advanced techniques of programming. Among many interesting features of this machine is the use of printed circuits produced from BAKELITE Copper-Clad Laminated Materials. Used in front to back inter-connected panels and for mounting special pieces of equipment in various parts of the Computer, they reduce the bulk of these assemblies, thus helping to keep down the overall size of the Computer. Reliability provided by printed circuits is of prime importance and their use eliminates the possibility of faulty wiring, thus making servicing and maintenance very much simpler.

Today printed circuits on BAKELITE Copper-Clad Laminated Materials, either rigid or flexible, are finding new applications throughout the Radio and Electronics industries. They allow more freedom and precision to the designer, reduce production time and costs for the manufacturer, and give the customer a lighter, more compact and reliable instrument.

Write today for a copy of "Copper-Clad BAKELITE Laminated for Printed Circuits".

BAKELITE LIMITED

12-18 GROSVENOR GARDENS · LONDON SW1 · SLOane 0898

Bakelite Limited manufacture an extensive range of plastics materials and maintain a technical service unequalled in the industry. No matter what your plastics problems this service is at your disposal. SLOane 0898 is the telephone number.

TGA 1986

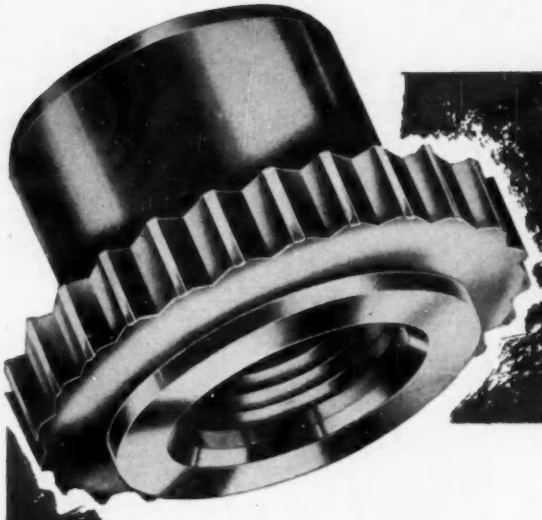

The ROSAN PRESS-NUT

The ROSAN Press Nut provides a deep tapped hole in metal sheet or plate—strongly secured. To fix the ROSAN Press Nut access from one side only is needed and no counterboring or countersinking is required. The ROSAN Press Nut is made in all threads up to $\frac{3}{8}$ in. and to special requirements.

Actual size **of a 4 BA. nut.**

Pat. App. No. 19826/57

To obtain full details of the ROSAN Press Nut, write or 'phone the Instrument Screw Co. Ltd., Northolt Road, South Harrow, Middlesex, Telephone: BYRON 1141 who will send you a descriptive leaflet and a sample.

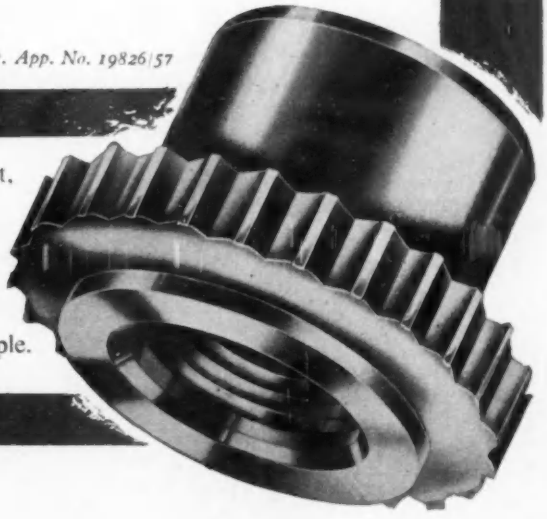

TAS/IS.4

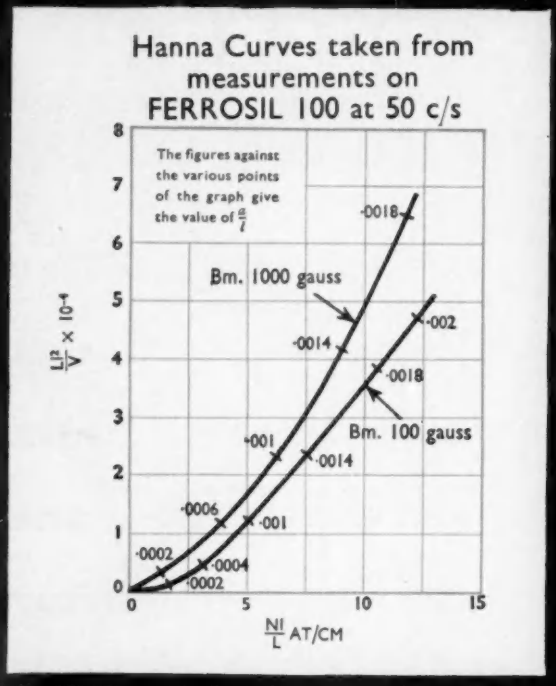

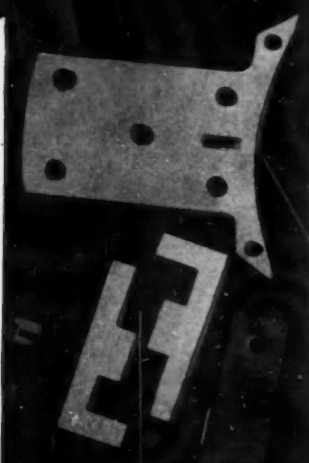



'Hanna' curves for 'FERROSIL 100'

Typical data of 'Ferrosil 100' stampings is shown by Hanna Curves such as are widely used by electronic engineers in the design of iron cored chokes and transformers carrying both A.C. and D.C. currents. Low-loss high-permeability Ferrosil stampings are ideally suited to an infinite number of applications, of which only a few are shown. Not only is there an R.T.B. stamping for every job, but a wealth of technical data is available both in our new catalogue and by request from

RICHARD THOMAS & BALDWINS LTD.

LAMINATION WORKS : COOKLEY WORKS, BRIERLEY HILL, STAFFS.
MIDLAND SECTION OFFICE : WILDEN, STOURPORT-ON-SEVERN, WORCS.
HEAD OFFICE : 47 PARK STREET, LONDON, W.1

Our Cookley Works is one of the largest in Europe specializing in the manufacture of laminations for the electrical industry.

RTB

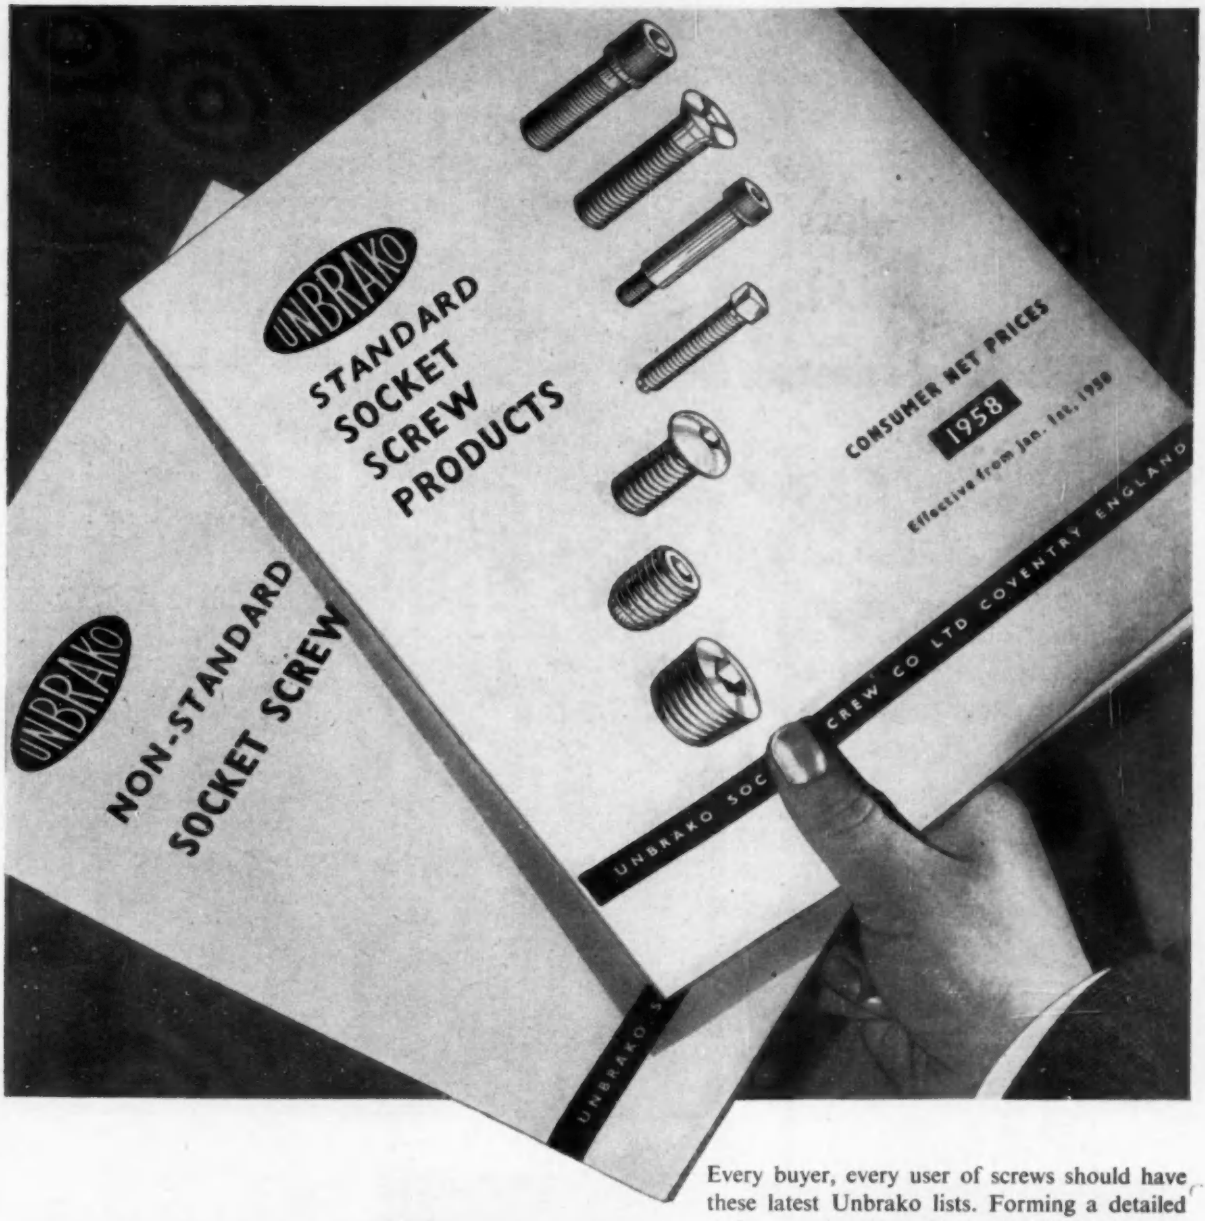

MORE THAN A PRICE LIST —THESE NEW UNBRAKO PUBLICATIONS ARE AN INVALUABLE SAFEGUARD OF YOUR INTERESTS

Every buyer, every user of screws should have these latest Unbrako lists. Forming a detailed and comprehensive guide to the whole Unbrako range, standard and non-standard, they will prove an invaluable addition to your bookshelves and enable you to always specify Unbrako screws for any job rather than risk screws that may lead to costly breakdowns.

A postcard or telephone call will bring your copies by return.

UNBRAKO SOCKET SCREW CO UNBRAKO LTD · COVENTRY

'FLUON' *increases production in the Electrical Industry—No. 2*

Marconi's Wireless Telegraph Co. Ltd., use 'Fluon' washers and insulators

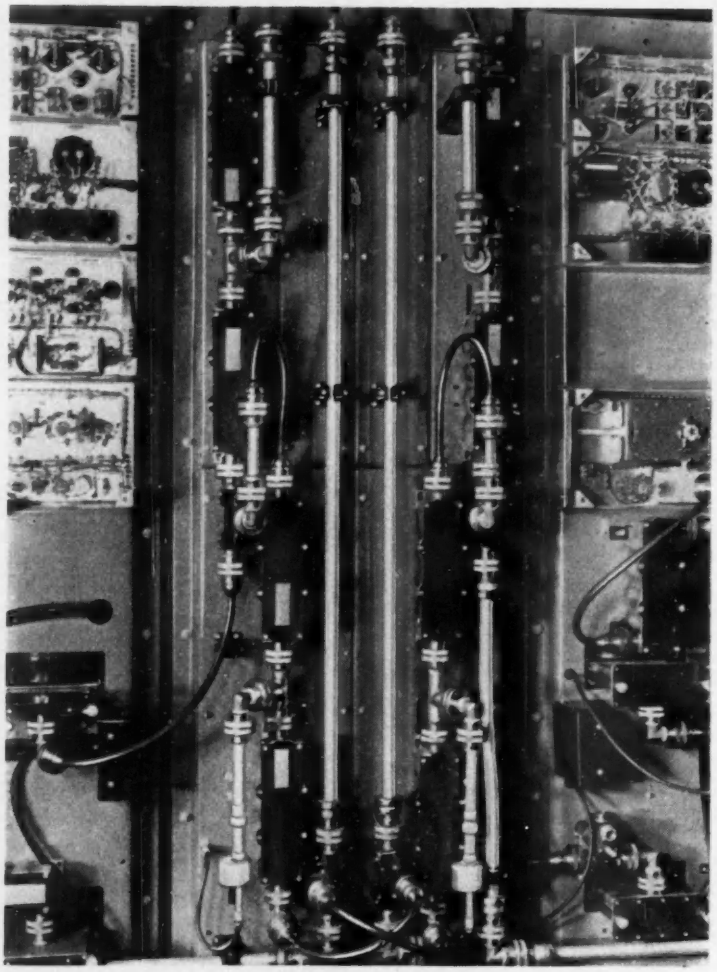

'FLUON', originally developed for its immunity to chemical attack, is now finding its most important outlets in the electrical and electronics industries. It is the best of the solid dielectrics and is an excellent electrical insulator.

It is being used in a wide variety of ways ranging from cable and wire insulation to T.V. antennae insulators; from high temperature condenser dielectric to low friction bearings for variable resistors. It is in fact the insulating material to use wherever maximum efficiency and extreme reliability are required over an indefinite period.

Marconi's Wireless Telegraph Co. Ltd. use 'Fluon' p.t.f.e. capacitor plates, washers, etc. made by 'Dalau' Specialised Plastics, Clacton-on-Sea, in their Wide-Band Multi-Channel Radio Link Equipment. Here a coaxial coupling is dismantled to show 'Fluon' p.t.f.e. spacers.

'FLUON'

'Fluon' is the registered trade mark for the polytetrafluoroethylene made by I.C.I.

ICI

IMPERIAL CHEMICAL INDUSTRIES LIMITED · LONDON · S.W.1

PF.42

BERCO – BPT
Voltage Regulators

The Widest Range in the World

250VA–110kVA

The BERCO design team will help you with any voltage or current Control problem.

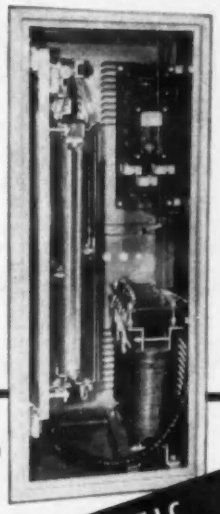

AUTOMATIC

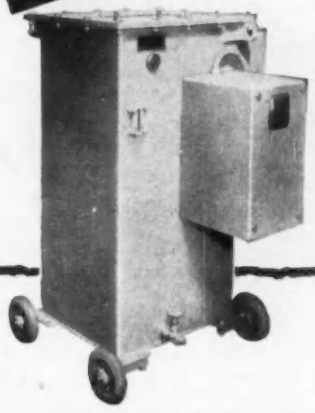



HAND OPERATED





MOTOR DRIVEN







★ Please write for our Catalogue which will be despatched by return of post.

THE BRITISH ELECTRIC RESISTANCE CO. LTD.

IN ASSOCIATION WITH

THE BRITISH POWER TRANSFORMER CO. LTD.

QUEENSWAY · ENFIELD · MIDDLESEX · Telephone: HOWard 2411

2A

Simplified

★ REPLACEMENT
★ PROTOTYPING
★ STOCK CONTROL



Our "MAKA-SWITCHES" (supplied as separate "Shafting Assemblies", "Spacers", "Mains Switches" and 5 Combinations of "Wafers") enable you to build almost any "Rotary" up to 6 Banks, thus solving all your SWITCHING PROBLEMS!

You can now build almost any Mains Dropper by using our "MAINS DROPPER SECTIONS". Available in a range of 32 Values (2 sizes). Another one of your headaches (especially T/V Droppers) gone!

Full Guarantee
Today's orders despatched today
Trade and industry only supplied

Radiospares Ltd.

4-8 MAPLE STREET · LONDON · W.1 · ENGLAND

Telephone: EUSton 7232-7

TELEGRAMS: RADOSPERES, WESDO, LONDON *CABLES:* RADOSPERES, LONDON

TYPE 12T03A

The Decca True Motion Radar† one of the most comprehensive marine radar equipments manufactured, uses a 'Cintel' Cathode-ray Tube for display purposes.

This tube is but one from a wide range in current production suitable for radar applications and radar is only one of the facets covered by the complete range of 'Cintel' Tubes.

†*Photograph by courtesy of Decca Radar Ltd.*

RADAR TUBES

✻ **over 200 tube types in the current catalogue. Full data on request.**

WORSLEY BRIDGE ROAD
LOWER SYDENHAM · LONDON · SE26
A Company within the Rank Organisation Ltd. **HITHER GREEN 4600**

CINTEL

HYPREZ
DIAMOND COMPOUND

GIVES
SURFACE PERFECTION

Some typical applications:



METALLURGICAL SPECIMENS



EXTRUSION DIES



PLASTIC MOULDS

HYPREZ is the most up-to-date method for **economic fine-grinding, lapping and polishing,** of steel, stainless steel, cast iron, non-ferrous metals, chrome-plate, stellite, tungsten-carbide, boron-carbide, sapphire, quartz, ceramics, etc.

It has been developed to impart the very finest degree of surface finish to a variety of materials and is currently employed in the finishing of **metallurgical specimens, plastic moulds, tungsten-carbide dies** (i.e. drawing, extrusion, forming and cold-heading dies), **cutting tools, die casting cavities, instrument bearings and pivots, etc.** The hardness of the diamond particles makes it suitable for use on the hardest of metals, for fine grinding, lapping and polishing.

ENGIS LTD.

GABRIEL'S HILL · MAIDSTONE · KENT

Telephone: MAIDSTONE 55185/6 *Telegrams & Cables:* ENGIS, MAIDSTONE
EXPORT OFFICE: 25, VICTORIA STREET, LONDON, S.W.1. *Telephone: ABBey 2487-8-9*

UNDOUBTEDLY . . .

" For inductance or capacitance measurements the measuring bridge is energised by the output from a valve oscillator, the out-of-balance voltage from the bridge being applied to the built-in selective amplifier-detector and moving-coil indicator, while for resistance measurements the indicator is used directly as a centre-zero galvanometer, the necessary d.c. for the bridge being derived from the power pack supplying the oscillator and detector used for inductance and capacitance measurements."

One of the problems of the age is how to keep up with the younger generation. One can support the shame of being unable to help with homework, but the prospect of having to admit ignorance of electronic equipment is intolerable. For instance, what do you know about the Marconi Universal Bridge Type TF 868A? Could you impress our young friend with an authoritative description of the instrument's ingenious mechanical design which provides single-dial measurement of L, C, and R? You owe it to yourself to be really up-to-date about Marconi Instruments—after all, they are important tools of your trade. Start with the TF 868A. Our leaflet J 112 contains full details, and we'll gladly send you a copy.

UNIVERSAL BRIDGE
Type TF 868A

Measures inductance or capacitance at 1 or 10 kc/s, resistance at d.c. Measurement Ranges: 1 μH to 100 henrys, 1 μμF to 100 μF, 0.1 ohm to 10 MΩ. Q Range: 0.1 to 10 at kc/s, 1 to 100 at 10 kc/s. Tan δ Range: 0.001 to 0.1 at 1 kc/s, 0.01 to 1.0 at 10 kc/s.

MARCONI INSTRUMENTS

AM & FM SIGNAL GENERATORS · AUDIO & VIDEO OSCILLATORS · FREQUENCY METERS · VOLTMETERS POWER METERS · DISTORTION METERS · FIELD STRENGTH METERS · TRANSMISSION MONITORS DEVIATION METERS · OSCILLOSCOPES, SPECTRUM & RESPONSE ANALYSERS · Q METERS & BRIDGES

MARCONI INSTRUMENTS LTD · ST. ALBANS · HERTFORDSHIRE · TELEPHONE: ST. ALBANS 56161

London and the South: Marconi House, Strand, London, W.C.2. Tel: COVent Garden 1234
Midlands: Marconi House, 24 The Parade, Leamington Spa. Tel: 1408 *North:* 30 Albion Street, Kingston-upon-Hull. Tel: Hull Central 16347
WORLD-WIDE REPRESENTATION

TC 112

your way to cut production costs



THE MINIATURE

GDT 120 M

PRIMED

TRIGGER TUBE

This new tube has been introduced to meet those low-cost trigger tube applications which demand closer tolerances and additional features normally not met with in tubes of this low price range.

As in the earlier GTR 120 W, the Ericsson combined cathode/getter element (patent applied for) forms the basis of this new design ensuring maximum performance at minimum cost.

The inclusion of an entirely separate built-in light source gives the circuit designer complete reliability of operation under all lighting conditions and consequently greater flexibility of circuit layout.

ERICSSON

TUBE DIVISION

BEESTON, NOTTINGHAM

FREE SAMPLES *are immediately available to Research and Development Organisations. Please write to the* TECHNICAL SERVICES DEPARTMENT

ERICSSON TELEPHONES LTD., HEAD OFFICE: 22 LINCOLNS INN FIELDS, LONDON, W.C.2.

Originators and Sole Manufacturers of the Dekatron Cold-Cathode Scaling Tube.

J. RUSSELL ELECTRONICS LIMITED

Corona Stabiliser Tube

TYPE CS.3

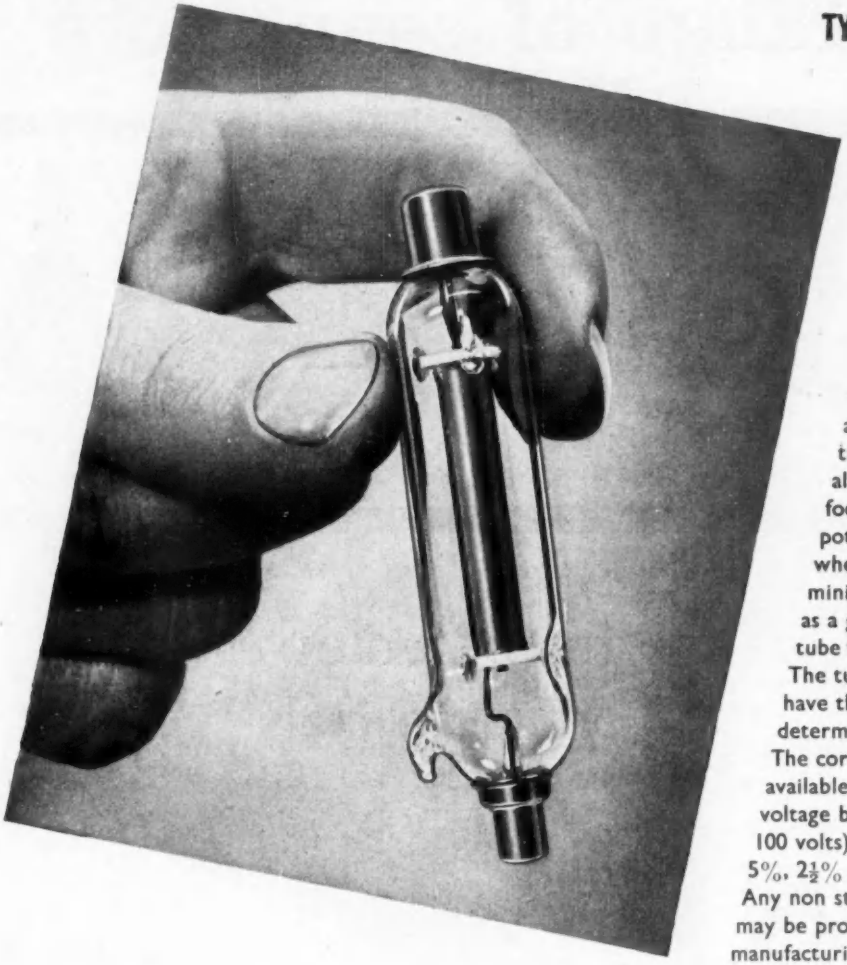

The corona stabiliser is a low current gas discharge tube for the regulation of voltages from 400 to 1,400, in circuits such as supplies for G-M counter tubes or photomultipliers but can also be used for stabilising beam focussing and accelerating potentials of cathode ray devices, where current consumption must be minimised. It may also be used as a general purpose voltage reference tube for all electronic equipment. The tubes which are hydrogen filled have their operating voltages determined by the hydrogen pressure. The corona stabiliser type CS.3 is available in standard form with operating voltage between 400-1,400 (in steps of 100 volts) and alternative tolerances of 5%, 2½% or 1%. Any non standard voltage within the range may be produced upon request with a manufacturing tolerance of 1%.

Full information may be obtained from

PEÑA INDUSTRIES LIMITED

Electronics Division

Peto Scott Electrical Instruments Limited
Easipower Limited
Cosmocord Limited
Thermionic Products Limited
Telemechanics Limited
Conrad Electrical Company Limited
J. Russell Electronics Limited

2-4 BROOK ST., LONDON, W.1. *Telephone: MAYfair 8262*

Performance proved since 1939 —the patented 'Tuchel' contact principle is a feature of the **Modac** range of connectors

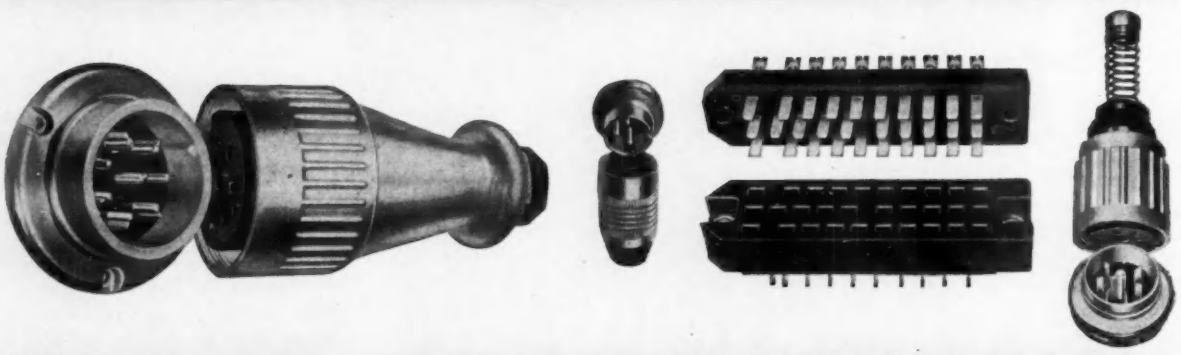

Within the MODAC range of connectors are available strip type, miniature, general service and heavy duty designs to meet most needs and applications.
The full technical data is set out in this new, completely illustrated brochure, a copy of which may be obtained on request.

Send for this new and fully illustrated brochure



MODERN ACOUSTICS LIMITED
CONTACT CONNECTORS DIVISION
MANOR WAY · BOREHAM WOOD · HERTS
Sole concessionaires of 'Tuchel' in Great Britain and Commonwealth Countries.

this patented principle gets to grips with improved contacting

Each pin on every Modac connector is gripped by up to 24 self-cleaning resilient pincer-like contacts which ensure the firmest mating and maintain clean and oxide-free surfaces. Modern Acoustics will be pleased to undertake the design of any special plug and socket arrangement to meet specific needs.

MA1a

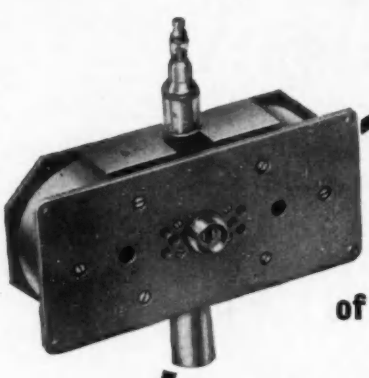



A selection
from a range
of special valves and tubes

E.M.I.
MAGNETRONS AND REFLEX KLYSTRONS

for J-BAND and Q-BAND



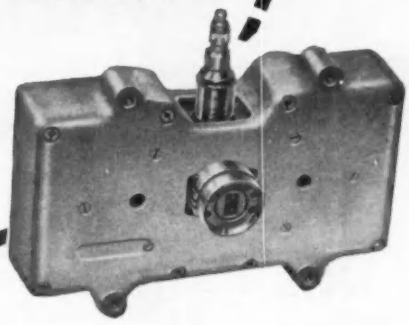

FIXED FREQUENCY PACKAGED MAGNETRONS

Type No.	Fixed frequency within range:—	Min. Peak Power	Max. Mean Power	Waveguide Termination
R 9509	16—17 kMc/s	50 kW	38W	WG 18
R 6138	34—36 kMc/s	15 kW	10W	WG 22
R 9515	34—36 kMc/s	30 kW	20W	WG 22

REFLEX KLYSTRONS

Type No.	Approximate Frequency Coverage	Minimum Power	Va	Nominal Ia	Waveguide Termination
R 9520	16—17 kMc/s	15 mW	350V	32 mA	WG 18
R 9521	35—40 kMc/s	15 mW	2000V	12 mA	WG 22
R 9546	32—38 kMc/s	15 mW	2000V	12 mA	WG 22
R 9518	28—32 kMc/s	15 mW	2000V	12 mA	WG 22
R 9547	24—28 kM/cs	15 mW	2000V	12 mA	WG 22

OTHER PRODUCTS: **Plug-in and integral-cavity Reflex Klystrons for frequencies 1000-12000 Mc/s; power up to 4 W. Photomultipliers, Television Camera Tubes and Special C.R.T.s**

For further information please contact:—

E.M.I. ELECTRONICS LTD., VALVE DIVISION,
RUISLIP · MIDDLESEX RUISLIP 4091

EE 123



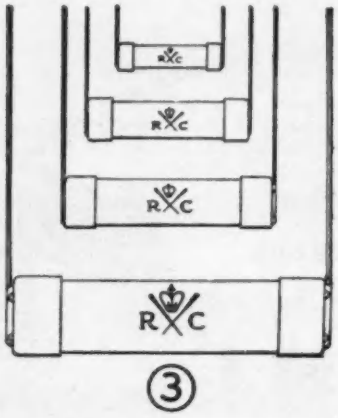

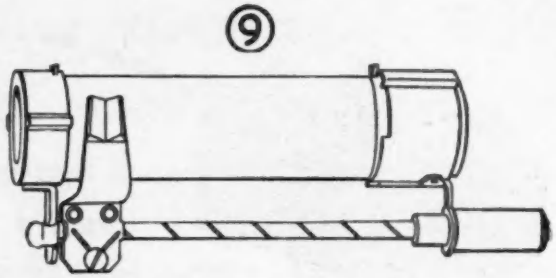

A SERVICE FOR DESIGNERS

The possibility of a component change—due to shortage of supplies, increased costs or failure to meet specific conditions—is a problem facing every designer of electronic equipment. However, one basic component can be 'tailor-made' from the start, for LAB will supply the precise type of Resistor required, ex stock *and* at the right price. Write for full technical data, prototype samples and price schedules to :—

THE RADIO RESISTOR CO. LTD.,

50, ABBEY GARDENS, LONDON, N.W.8

Telephone: Maida Vale 0888

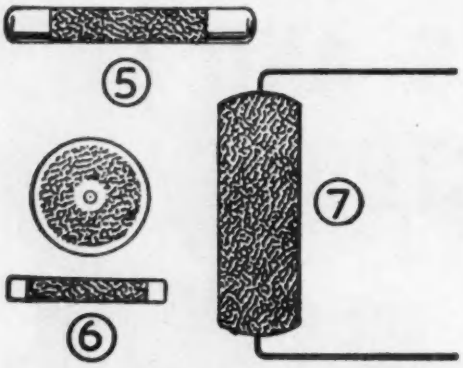



CARBON	WATTS	OHMIC RANGE	TOLERANCES ±
1. Solid	½ 1 & 2	10—10M	5% & 10%
2. Cracked	1/30—20	1—500M	5% & 10%
3. *High Stability	1/10—3	1—50M	0.5% 1% 2% 5%
4. Variable	½	5K—2M	—
5. V.High Resistance	½—3	50M—10^{13}	5% & 10%
6. V.H.F. (Rods & Discs)	1/10—1	10—1K	1% & 2%
WIREWOUND			
4. Rheostats	4—500	10—80K	—
9. Sliders	3—15	10—16K	—
8. Vitreous	3—500	1—150K	1% 2% 5%
7. Cemented	1—15	1—25K	5% & 10%

*The ubiquitous blue (1%) grey (2%) "HISTABS"

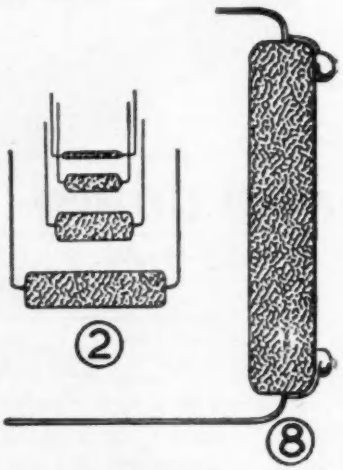

Do you KNOW

THAT V.H.F. rods and discs (5) can be supplied in matched pairs.

THAT Rheostats (4) can be made up in twos and threes on a common spindle.

25 YEARS LAB TESTED JUBILEE YEAR OF RESISTOR SPECIALISATION

Taylor Tunnicliff

ADMIRALTY "FISHSPINE" BEADS

for bare wire insulation

with no gapping on the sharpest bend!

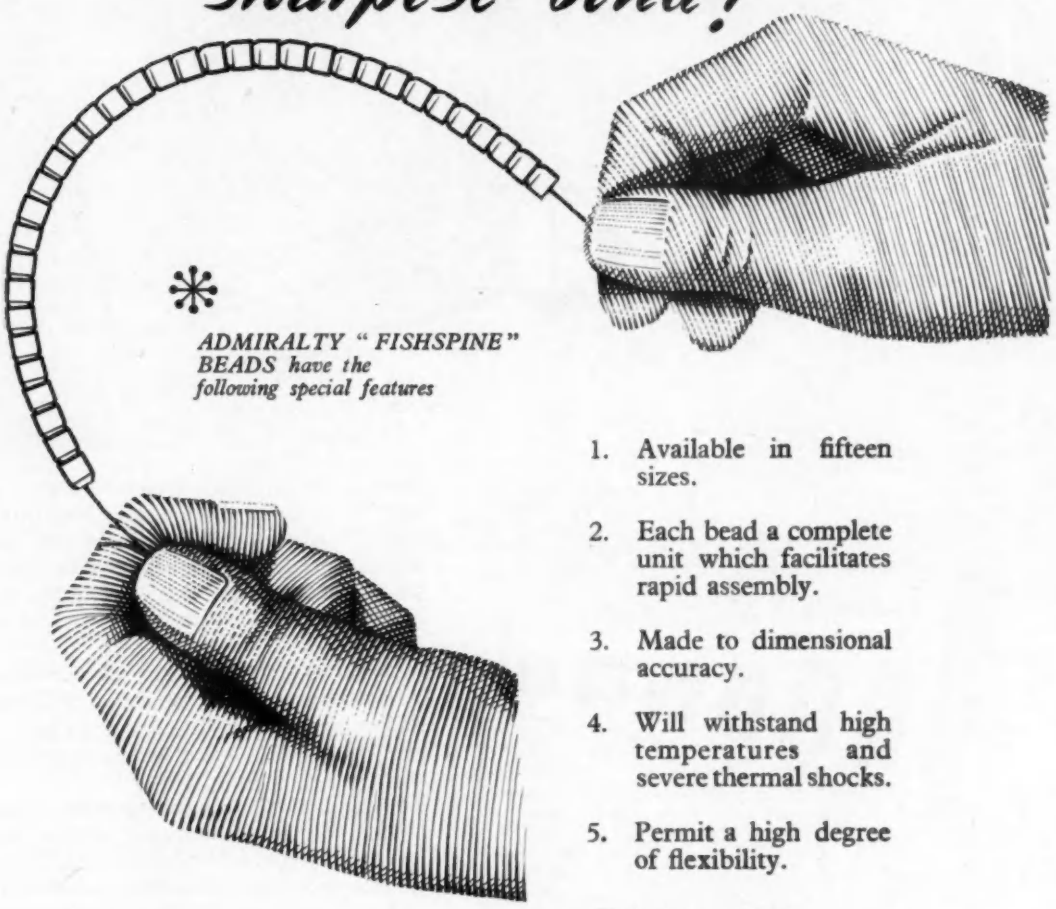

✻ *ADMIRALTY "FISHSPINE" BEADS have the following special features*

1. Available in fifteen sizes.
2. Each bead a complete unit which facilitates rapid assembly.
3. Made to dimensional accuracy.
4. Will withstand high temperatures and severe thermal shocks.
5. Permit a high degree of flexibility.

Delivery ex stock.

Full technical data, quotations and samples available on request

TAYLOR TUNNICLIFF (REFRACTORIES) LTD

Albion Works, Longton, Stoke-on-Trent, Staffs.

Tel.: Longton 33071/2

London Office: 125 High Holborn, W.C.1. *Tel.: Holborn 1951/2*

YOU are invited to write for a FREE copy

Nickel alloys provide for the designer a range of materials with a wide variety of magnetic properties. These include, on the one hand, the "soft" magnetic alloys, amongst which are found the highest permeabilities ever reported, and, on the other hand, steels which are sensibly non-magnetic.

A further group contains the most powerful permanent-magnet materials known, whilst yet another class provides the optimum properties for applications depending on magnetostrictive effects.

The high level of magnetic properties not only permits economic advantages, in saving the bulk and weight in equipment, but makes possible technical performance unattainable with other materials. Further advantages may often be realised in improved corrosion-resistance compared with that of other ferro-magnetic materials.

To give engineers and designers the fullest technical data on these important properties we have available a new publication "The Magnetic Properties of the Nickel-Iron Alloys". You are invited to write for a free copy.

THE MOND NICKEL CO. LTD. THAMES HOUSE · MILLBANK · LONDON S.W.I

TGA 21/36

"BELLING-LEE"

PRINTED CIRCUIT CONNECTORS

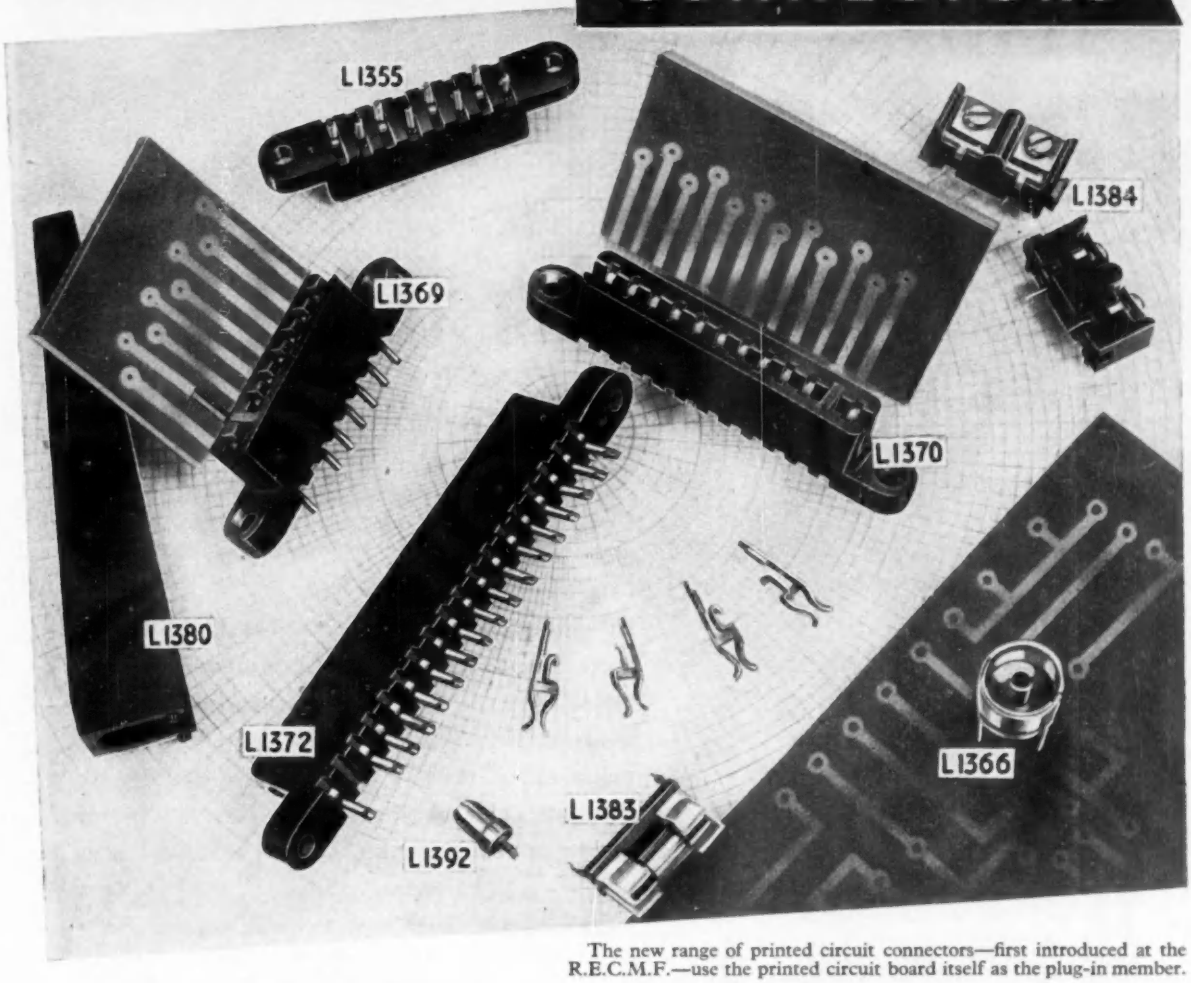

L.1369	8-pole connector 0.15″ module
L.1370	12-pole connector 0.15″ module
L.1372	18-pole connector 0.15″ module
L.1355	8-pole connector 0.1″ module
L.1380	Printed circuit guide
L.1381	Polarizing pin for connectors
L.1366	Coaxial socket (accepts standard plugs)
L.1383	Fuseholder size 00
L.1384	2-way Terminal block (Dovetail type)
L.1392	Test Point

The new range of printed circuit connectors—first introduced at the R.E.C.M.F.—use the printed circuit board itself as the plug-in member.

The unique contact spring construction ensures that a very large number of insertions and withdrawals of the board can be made without deterioration of the circuit or connector. The springs are gold-plated to ensure a low resistance connection.

Correct polarity of insertion can be arranged by removing a contact and replacing it with a polarizing pin (L.1381) which engages with a slot cut in the panel. More than one polarizing pin may be used to "code" boards in an assembly.

All printed circuit components have been designed for dip-soldering and any holes in the base panel are on the 0.1″ grid, with the exception of types L.1369, L.1370 and L.1372 which are on a 0.025″ grid because of their 0.15″ spacing. For example, with L.1355 connector all holes, including those for fixing the connector and the guides (L.1380), are on the 0.1″ grid.

The coaxial socket accepts standard free plugs. The fuseholder accepts "Belling-Lee" fuselinks L.754 and L.562 (10 mA to 7A ratings).

BELLING & LEE LTD

GREAT CAMBRIDGE ROAD, ENFIELD, MIDDX., ENGLAND

Telephone: Enfield 3322 · Telegrams: Radiobel, Enfield

FARNELL
Instruments
LTD.

LIGHT INDUSTRIAL ESTATE,
YORK ROAD, WETHERBY, TELEPHONE 2544

VISIT OUR

SECOND INDUSTRIAL ELECTRONICS EXHIBITION

in the North East

OPEN DAILY from 10 a.m. to 5 p.m.
TUESDAY, MAY 20th to FRIDAY, MAY 23rd inclusive

at the

RUTHERFORD COLLEGE OF TECHNOLOGY

NORTHUMBERLAND ROAD, NEWCASTLE-UPON-TYNE, 1

A number of new instruments not seen at the Spring Exhibition in London will be on Show at our exhibition.

Exhibitors include:-
Advance Components, Ltd · Avo Ltd · Cossor Instruments, Ltd . Dawe Instruments, Ltd Hivolt, Ltd · Micro-Wave Instruments, Ltd Nagard, Ltd · Nash and Thompson, Ltd · Racal Engineering, Ltd · Rutherford College of Technology · Bryan Savage, Ltd . Taylor Electrical Instruments, Ltd · Telequipment, Ltd · Waveforms, Ltd · Wayne Kerr Laboratories, Ltd

★ *Some of the leading technical journals will also be exhibiting.*

Admission by TICKET ONLY

Obtainable free of charge from the Principal, Rutherford College of Technology, direct from Farnell Instruments, Ltd., or any exhibitor

Manufacturers' technical advisers will be available on each Stand

High-Temperature Strain Gauges

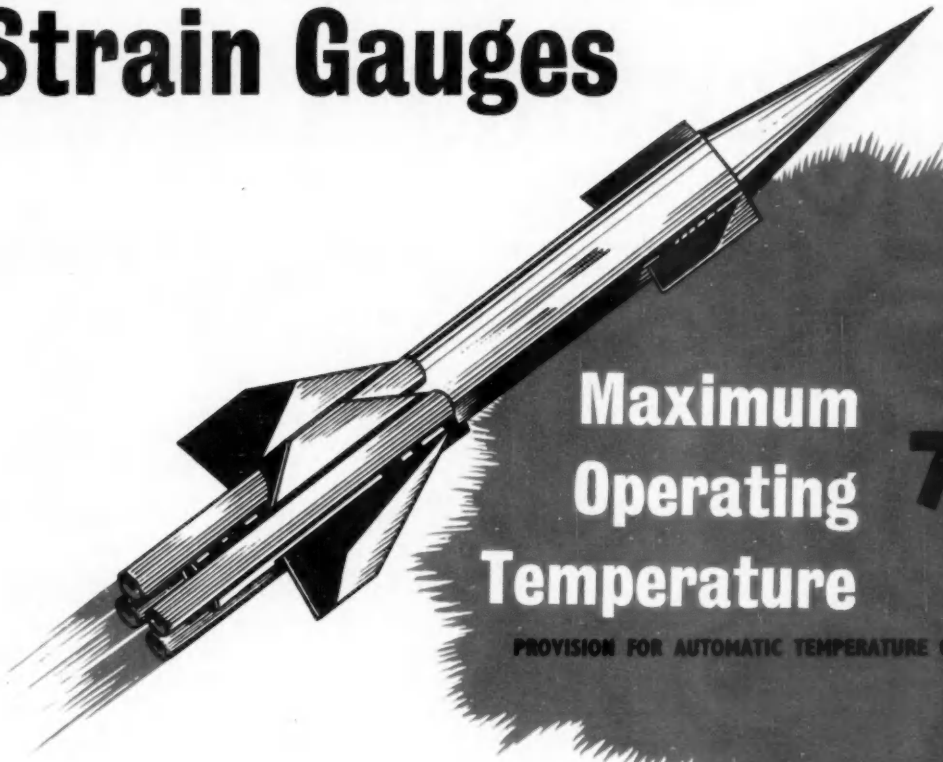

Maximum Operating Temperature 750° C

PROVISION FOR AUTOMATIC TEMPERATURE COMPENSATION

3 TYPES OF BASES AVAILABLE including Ceramic

SMALL SIZE

RIGID CONSTRUCTION—
fatigue tests have been carried out on gauges attached to aluminium alloy specimens with an alternating stress of 10 tons per sq. in. All but one specimen withstood ONE MILLION REVERSALS designed and used extensively by **A. V. ROE** & Co., Ltd., prior to release.

AVRO-FARNELL ACCESSORIES manufactured by FARNELL INSTRUMENTS LTD.

SPOT WELDING EQUIPMENT *for connecting leads to strain gauges.*

BALANCING AND SELECTOR UNITS. ALTERNATING STRAIN MEASURING INSTRUMENTS.

Also Complete Kits comprising:
Strain Gauges (in units of ten)
Connecting Leads
Thermistors
Special High-temperature Adhesive Cement, etc.

Available direct from the sole suppliers:-

FARNELL
Instruments
LTD.

SEE THESE ON OUR STAND at the NEWCASTLE EXHIBITION

WETHERBY INDUSTRIAL ESTATE, YORK ROAD, WETHERBY, YORKS. **Telephone 2544**

(Further details available on application)

a transmitting all communications

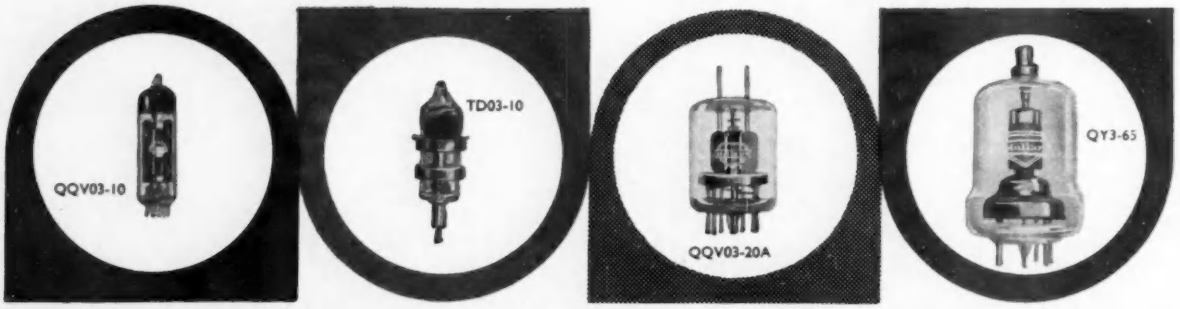

Valve Output Power in Watts	Type Number
10,000·0	TY7-6000A
10,000·0	TY7-6000W
6,900·0	TY6-5000A
6,900·0	TY6-5000W
4,100·0	QY5-3000A
4,100·0	QY5-3000W
1,690·0	TY4-500
1,440·0	TY4-350
1,000·0	QY4-250
900·0	QY4-500A
845·0	TY3-250
390·0	TY2-125
375·0	QY3-125
280·0	QY3-65
195·0	QV1-150A
90·0	QQV06-40A
87·0	QQV07-40
52·0	QV06-20
48·0	QQV03-20A
27·0	TD1-100A
26·0	QQV04-15
23·0	TD04-20
16·0	QQV03-10
10·0	QV03-12
7·9	QV04-7
6·0	QQV02-6
2·8	TD03-10
2·0	TD03-10F
0·02	TD05-12

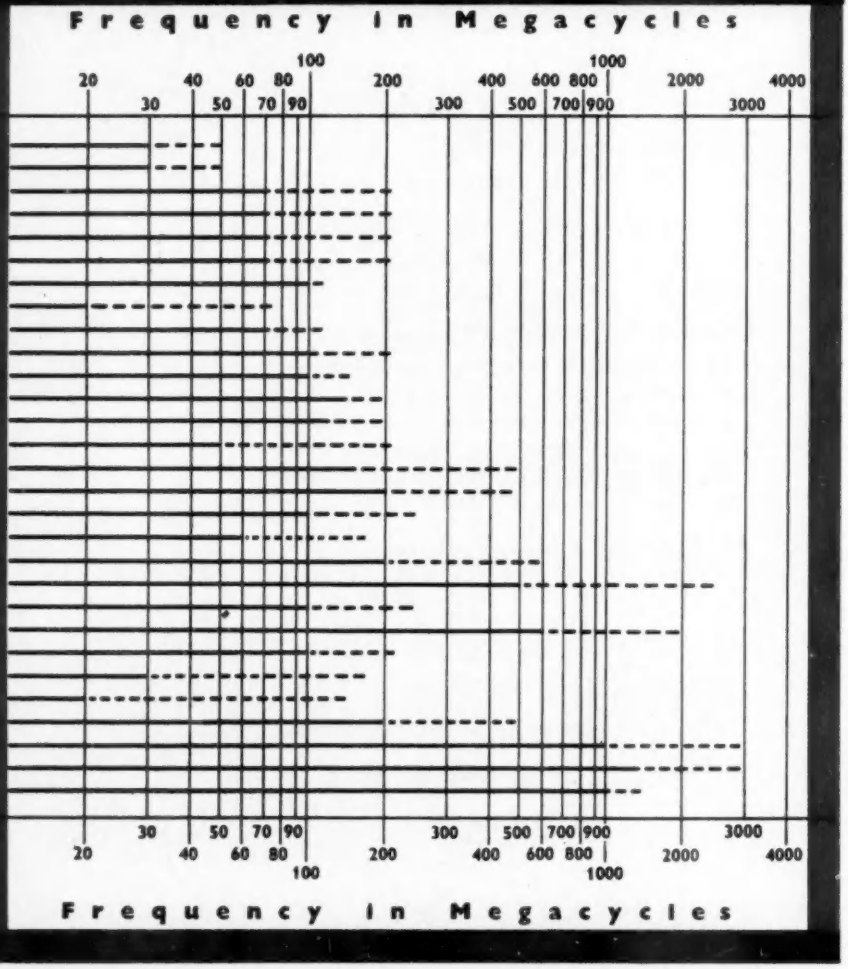

valve range for equipment

This extensive range of work-proven transmitting valves fills the wide and diverse needs of communications equipment manufacturers. The performance of this valve group extends to frequencies as high as 3,000 Mc/s for 0.5W and to powers up to 6.9kW at lower frequencies.

The Mullard technical advisory service is always at the disposal of manufacturers to answer questions relating to the applications and suitabilities of these valves.

Transmitting Valve Data

This chart has been compiled to acquaint designers with the range and scope of Mullard transmitting valves available for communication purposes, and to facilitate the selection of suitable types for given applications.

The power quoted is the maximum valve output available with Class C telegraphy operation up to the frequency indicated by the junction of the solid and lines. The extent to which a valve may be used at higher frequencies with reduced ratings is given by the line.

More detailed information may be obtained from a leaflet on this range of valves and from individual data sheets—all of which are available on request at the address below.

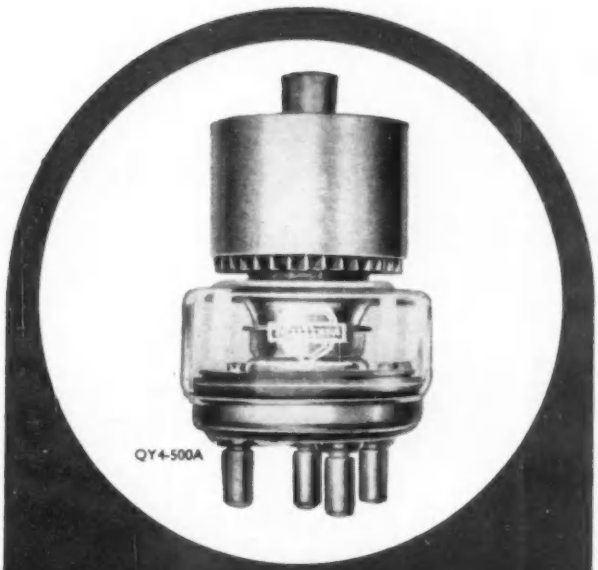

Mullard

COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT

MULLARD LIMITED · MULLARD HOUSE · TORRINGTON PLACE · LONDON · W.C.1

MV 305

Here's a complete range of insulating tapes with improved thermosetting adhesive —

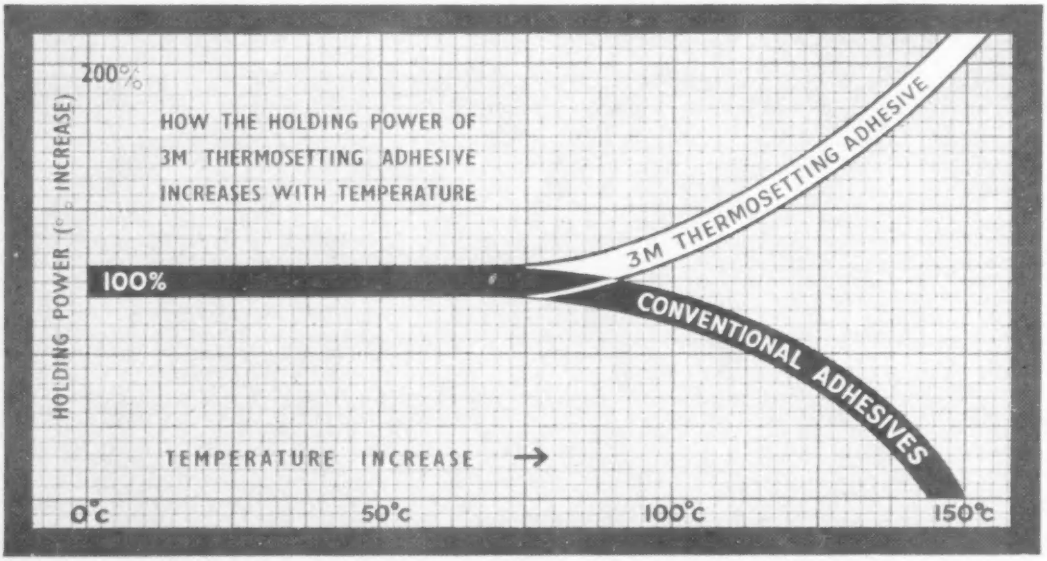

'Scotch Boy' electrical tapes

GREATER ADHESION · LONGER SHELF LIFE
RESISTANCE TO SOLVENTS · 50% MORE TACK

DON'T BELIEVE THESE CLAIMS WITHOUT PROOF :
Ask for a demonstration! Send this coupon to Minnesota Mining & Manufacturing Co, Ltd, 3M House, Wigmore Street, London, W.1,

NAME .....

ADDRESS .....

E.T.I.

HOLDING POWER . . . that's the big difference between pressure-sensitive insulating tapes with thermosetting adhesive and tapes with the conventional adhesives. Improved 3M thermosetting adhesive gives *holding power* to 'SCOTCH BOY' electrical tapes. It holds without softening under extreme operating heat . . . has high bond strength for anchoring leads . . . bakes dry to prevent "throw-out" . . . permanently resists the action of solvents, waxes, and varnishes. The only tapes with all these four advantages are electrical tapes with 3M thermosetting adhesive. 'SCOTCH BOY' electrical tapes with this unique adhesive are available in polyester film, acetate cloth, glass cloth, and paper.

TRADE MARK **SCOTCH BOY** *does the job BETTER!*

PRODUCT OF 3M RESEARCH

MINNESOTA MINING & MANUFACTURING COMPANY LIMITED
3M HOUSE, WIGMORE ST., LONDON, W.1, and BIRMINGHAM · MANCHESTER · GLASGOW

WORLD'S LARGEST MANUFACTURERS OF COATED PRODUCTS

CUT your Cost

by taking advantage of costing according to the number of channels required for initial coil loading, but ensuring interchangeability of subsequent loading.

IMPROVE your Gain

by providing easy alignment and simplified Dealer maintenance.

ADD to your Reliability

by ensuring consistent performance, both on current production and subsequent channel insertion.

INCREASE your Value

by offering full facility on T.V. and Radio in the 40-220 Mc/s range.

PROFIT by Experience

by using the facility of batch sequence channel loading, i.e. Any number of channels required can be loaded in any order, so obviating the necessity for switching through channels not required.

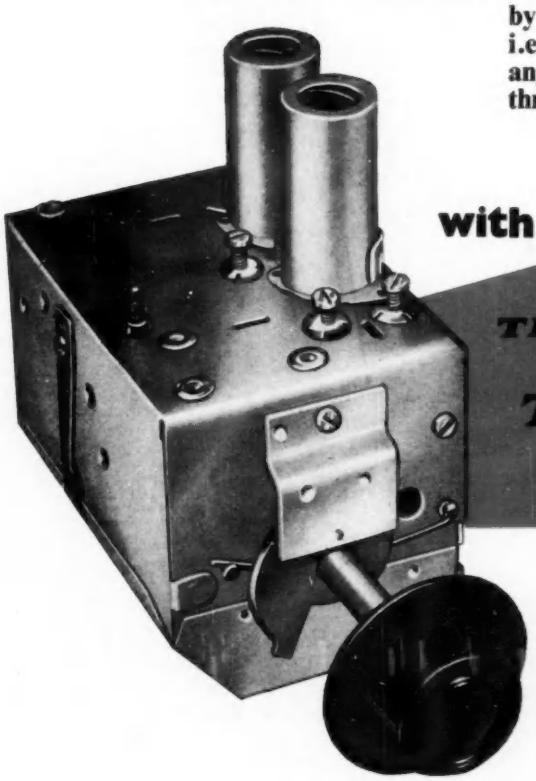

with

THE "Cyldon" TURRET TELETUNER

TRADE MARK

Receiver manufacturers only, write for full details and specifications.

SYDNEY S. BIRD
AND SONS LTD. POOLE DORSET

Contractors to Ministry of Supply, Post Office, and other H.M. Government Depts.

Address for enquiries and sales correspondence :-

London Sales & Technical Liaison Office,
3 Palace Mansions, Palace Gardens, Enfield, Middlesex.
Telephone: Enfield 8571-3 *Telegrams: "Capacity-Enfield"*

ELECTRONIC ENGINEERS

You can throw these away when the problem is

EXPERIMENTAL CHASSIS

LEKTROKIT

THE VERSATILE ELECTRONIC CONSTRUCTION KIT

GIVES YOU THE FOLLOWING ADVANTAGES

- ★ No delay in getting your ideas put into practice.
- ★ No need to interrupt your smooth flow of quantity production to produce Experimental Chassis.
- ★ Lektrokit Experimental Chassis can be modified quickly and simply.
- ★ A wide range of accessories permit the construction of bench or rack mounted units for permanent use.
- ★ Units can be fitted together almost indefinitely in a variety of ways.

ALL-POWER TRANSFORMERS LTD.

CHERTSEY ROAD, BYFLEET, SURREY TELEPHONE: BYFLEET 4411

OPERATIONAL RELIABILITY

RADIO PRODUCTS
EDDYSTONE
TRADE MARK

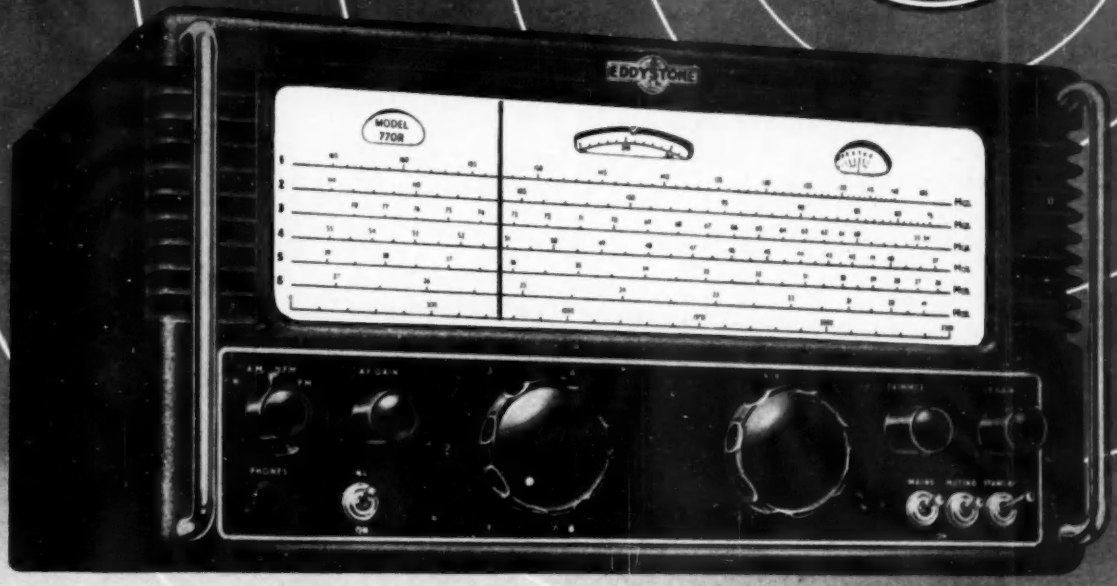

EDDYSTONE

VHF & UHF (AM & FM) Communications Receivers

Model 770R.
19-165 Mc/s.

Model 770U.
150-500 Mc/s.

Please write for full Technical Specifications to the Manufacturers

STRATTON & CO. LTD., BIRMINGHAM, 31

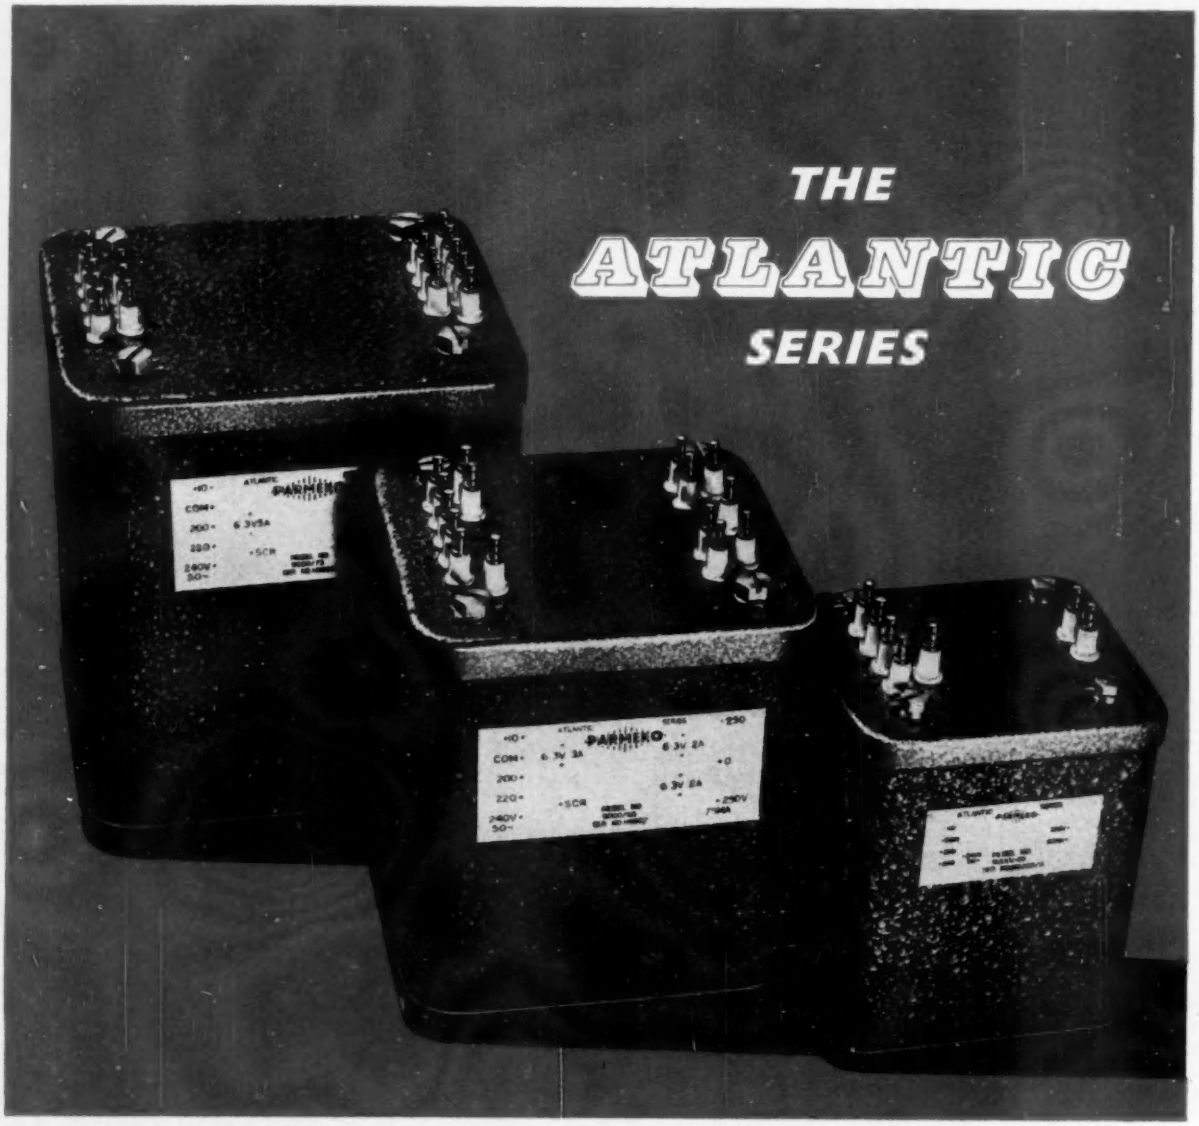

NEW LOW-COST TRANSFORMERS



The Atlantic Series offers advantages over the conventional open type transformer without increase in cost, thus fulfilling the need for a commercial equivalent to the existing ranges of open and hermetically sealed 'C' core constructions. Plan dimensions, terminal positions, and fixing centres comply with RCSC Specification RCL 215.

PARMEKO TRANSFORMERS

for the Electrical and Electronic Industries

PARMEKO LTD, PERCY ROAD, LEICESTER, ENGLAND

a Tailor-made furnace

may do YOUR bright heat treatment better

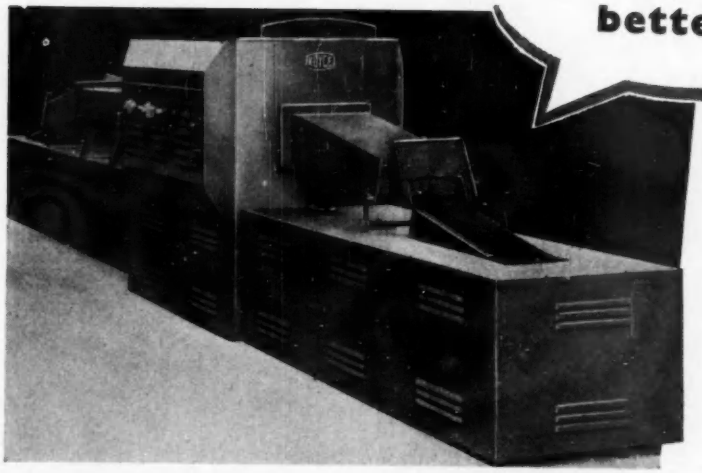

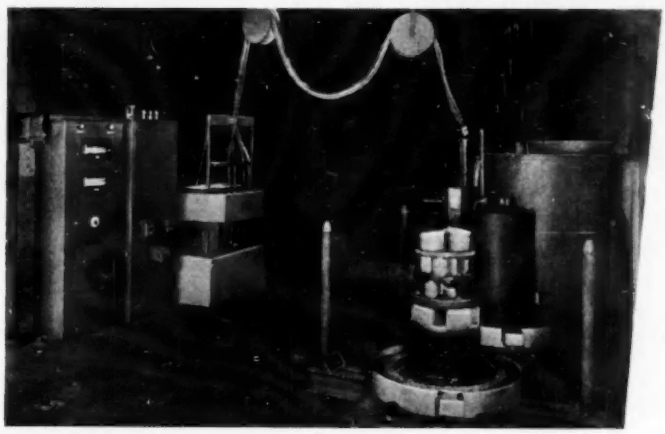

Often the best results in heat treatment work are obtained with a furnace designed expressly for a particular product or manufacturing technique. We specialise in furnaces tailor-made to meet special requirements. It is not an expensive business. And we can put a wealth of knowledge at your disposal. Our ability can be judged from the fact that we work for many leading manufacturers. Here are two examples:

(TOP ILLUSTRATION) Continuous mesh-belt conveying furnace for bright annealing in a cracked-ammonia atmosphere. A special 'hump-back' design eliminates discolouration of work at discharge.

(BOTTOM ILLUSTRATION) Bell furnace with three bases and gas-tight retorts for bright brazing and annealing in a nitrogen atmosphere.

ROYCE

ELECTRIC FURNACES LTD

SIR RICHARDS BRIDGE, WALTON-ON-THAMES, SURREY

SPECIALISTS IN FURNACES, OVENS AND KILNS DESIGNED FOR INDIVIDUAL REQUIREMENTS

Phone: Walton-on-Thames 206

S.T.C.

"Over the horizon"

RADIO TRANSMISSION SYSTEMS

A new advance in telecommunications...

The new S.T.C. "Scatter" equipment allows the transmission of telephone, telegraph and television signals over *distances of the order of 100 to 180 miles or more.* In appropriate conditions *up to 120 telephone circuits* can be transmitted on a single radio circuit.

The basic S.T.C. equipment provides *dual space-diversity reception,* but other diversity arrangements can be supplied.

Aerials consist of 30 ft. or 60 ft. elliptical reflectors, specially designed to overcome wind-loading problems. Station equipment, which uses the most modern waveguide techniques, is totally enclosed in a suite of neat metal cubicles.



Advice on systems planning and propagation testing can be obtained from

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

TRANSMISSION DIVISION: NORTH WOOLWICH · LONDON · E.16

GERMANIUM JUNCTION RECTIFIERS
— finned bridge units

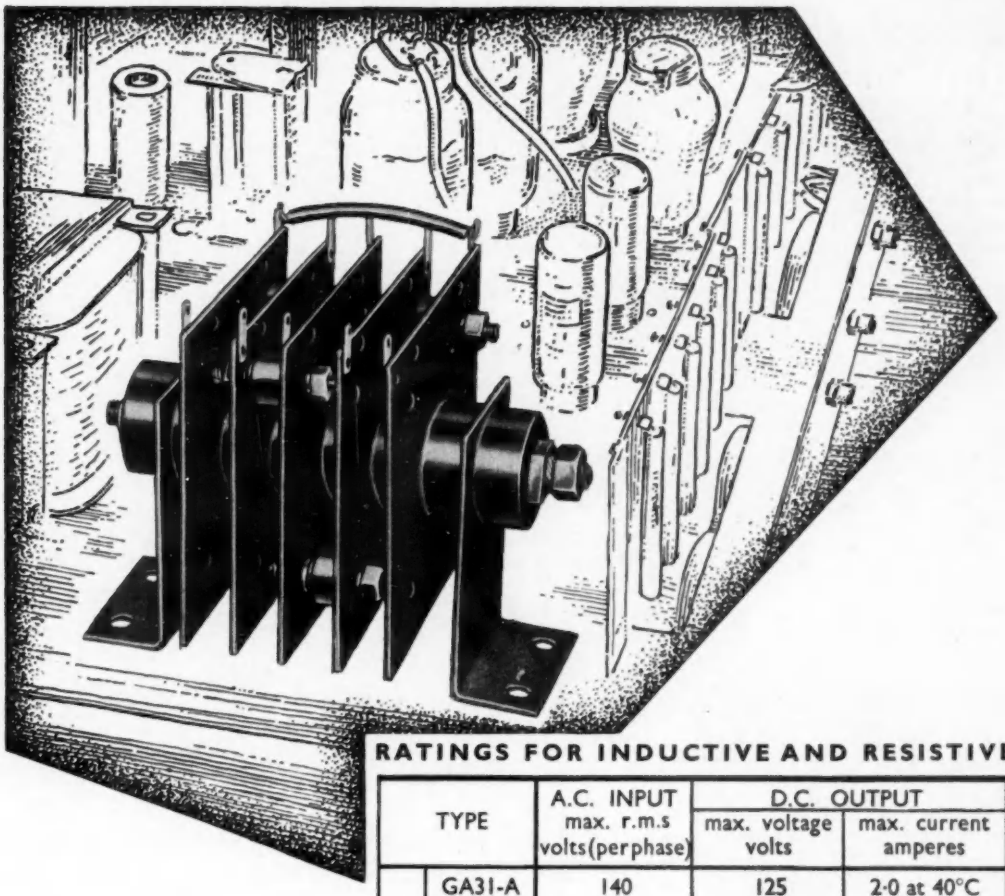

The well-known range of BTH germanium junction rectifiers is now available made up into convenient bridge units ready for incorporation in your equipment.

RATINGS FOR INDUCTIVE AND RESISTIVE LOADS

	TYPE	A.C. INPUT max. r.m.s volts (per phase)	D.C. OUTPUT max. voltage volts	D.C. OUTPUT max. current amperes	OVERALL LENGTH inches
SINGLE-PHASE	GA31-A	140	125	2·0 at 40°C	3¼
	GA41-A	53	47	2·0 at 60°C	3¼
	GA51-A	210	187	2·0 at 40°C	3¼
	GA61-A	106	94	2·0 at 60°C	3¼
	GA52-A	340	303	2·0 at 40°C	5
	GA62-A	170	151	2·0 at 60°C	5
	GA53-A	510	455	2·0 at 40°C	6¼
	GA63-A	254	227	2·0 at 60°C	6¼
THREE-PHASE	GB31-A	140	188	3·0 at 35°C	4⅝
	GB41-A	53	71	3·0 at 55°C	4⅝
	GB51-A	210	283	3·0 at 35°C	4⅝
	GB61-A	106	143	3·0 at 55°C	4⅝
	GB52-A	340	458	3·0 at 35°C	6¾
	GB62-A	170	229	3·0 at 55°C	6¾

BRITISH THOMSON-HOUSTON

THE BRITISH THOMSON-HOUSTON CO., LTD., RUGBY ENGLAND

an A.E.I. Company

A 5184

WEDGLOK

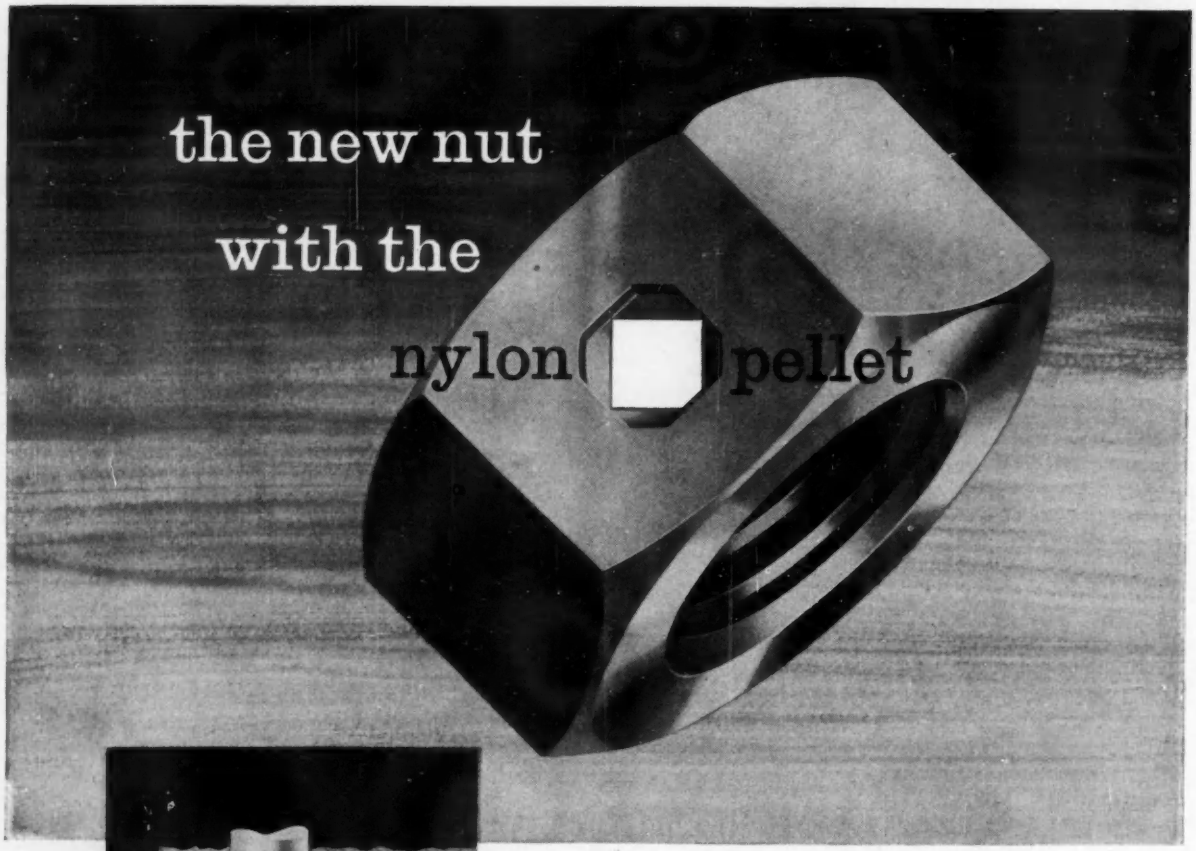

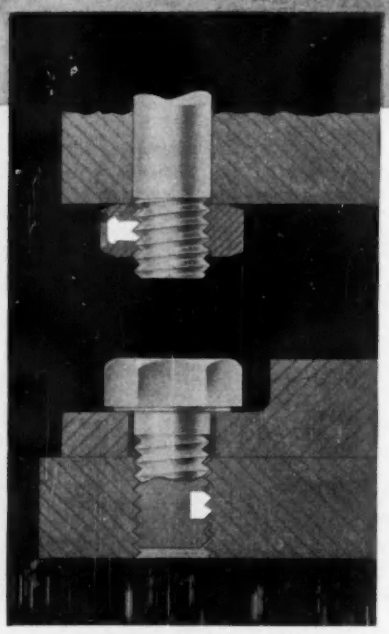

Wedglok nuts are completely self-locking. They will not work loose through vibration or reversal of stress. They need no locking devices—and the locking-action is unaffected by age or temperatures within the normal range.

How is it done?

In a Wedglok nut the locking element consists of a tough, resilient nylon pellet. This is inserted in the body of the nut and projects slightly above the crest of the thread. When the nut is turned the pellet sets up a wedging action, gripping the threads tightly. This counter-thrust creates metal to metal engagement of mating threads. The Wedglok principle can be applied to screws as well.

If it's a matter of how to fasten one thing to another . . . get in touch with GKN

Wedglok Self-Locking Products are manufactured under licence in the United Kingdom solely by
Guest Keen & Nettlefolds (Midlands) Ltd., Screw Division, Box 24, Heath St., Birmingham 18. Tel: Smethwick 1441
S/WK/3825

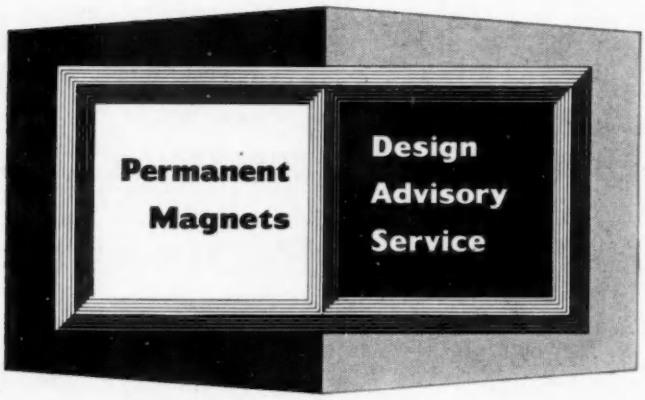

No. 2

Magnetic Circuits

Advertisements in this series deal with general design considerations. If you require more specific information on the use of permanent magnets, please send your enquiry to the address below, mentioning the Design Advisory Service.

The fundamental factors governing the design of a magnetic circuit are:—

(*a*) The magnetic field strength required in the air gap.

(*b*) The physical dimensions of the air gap.

(*c*) The leakage flux from the surface of the magnet (and pole pieces, if used).

If the dimensions of the gap and the flux required in it are known, the length of the magnet may be determined with the aid of either of the following simple formulae.

c.g.s. System

Length L_m of magnet in cm.

$$L_m = \frac{H_g \times L_g}{H_d} \times K_l$$

H_g is the field in the air gap in oersteds; L_g is the length of the air gap in cm; H_d is the design value of H from the magnet material characteristic.

M. K. S. System

Length L_m of magnet in metres

$$L_m = \frac{B_g \times L_g}{H_d} \times 4\pi \times 10^{-7} \times K_l$$

B_g is flux density in gap in webers/metre^2; L_g is length of gap in metres; H_d is in ampère-turns/metres.

K_l is a factor which may vary between 1.05 and 1.2. The lower value would apply if iron is of good magnetic quality operating well below saturation; also if joints in the magnetic circuit do not present appreciable reluctance.

The cross-sectional area of the magnet may be obtained by this formula.

Area A_m of magnet in sq. cm.

$$A_m = \frac{B_g \times A_g}{B_d} \times \text{Leakage Factor}$$

B_g is the flux density required in the air gap ($B_g = H_g$ in air); A_g = area of gap in sq. cm; B_d = design value of flux density of the magnetic material.

Leakage factors vary enormously with different applications and therefore, some experience or information is necessary in order to get a sufficiently close approximation for practical purposes. An example illustrating leakage is shown below.



APPROX. EFFICIENCY

Using the M. K. S. System, the same formula still applies with B_g and B_d in webers/metre^2 and the area in square metres.

If you wish to receive reprints of this advertisement and others in this series write to the address below.

Mullard

'TICONAL' PERMANENT MAGNETS
'MAGNADUR' CERAMIC MAGNETS
FERROXCUBE MAGNETIC CORES

MULLARD LIMITED, COMPONENT DIVISION, MULLARD HOUSE, TORRINGTON PLACE, W.C.1 Tel. LANgham 6633
MC 262

Presenting

A POWER UNIT FOR SCR-211 & BC-221 SERIES FREQUENCY METERS

Developed primarily for a Service requirement, this compact A.C. mains-operated power unit was designed to replace the batteries normally used with American Frequency Meters SCR-211 (BC-221), TS-174/U and TS-175/U. It is equally suitable for the British manufactured versions X7474 and X7475.

The power unit locates neatly into the former battery compartment, with a slight adjustment to compensate for varying case dimensions.

A small control box contains the mains ON-OFF switch, fuses, pilot lamp and mains input plug.

Input 110-120v or 200-250v A.C. 50-60 c/s.
Output 135v ± 2% 25mA Stabilised.
6v ± 2% 1A

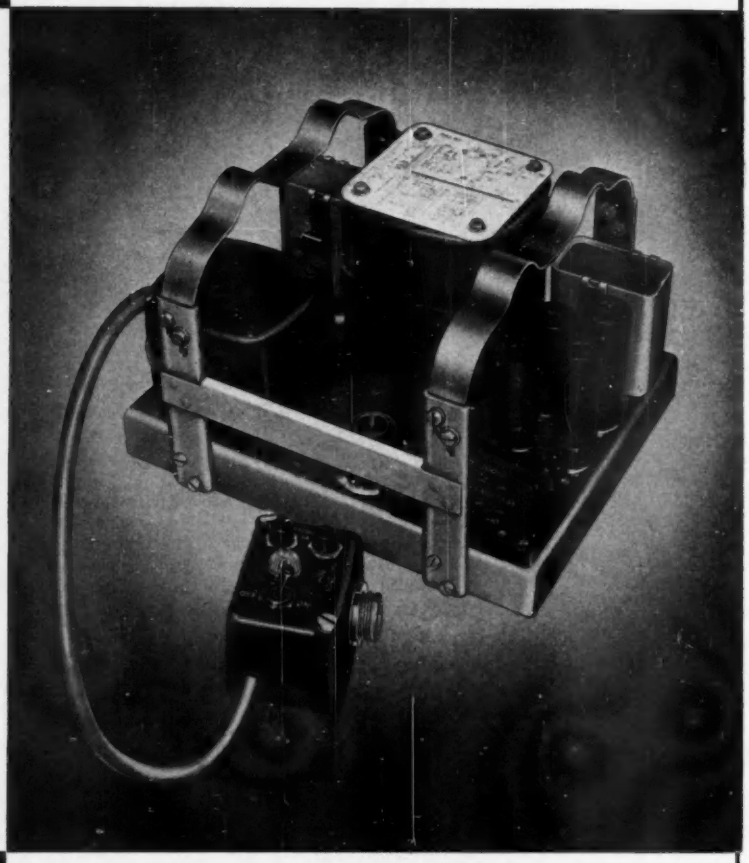

TYPE UE.22

GEB

G. & E. BRADLEY LTD.

ELECTRAL HOUSE · NEASDEN LANE · LONDON · NW10

TELEPHONE: GLADSTONE 0012-7 · TELEGRAMS · BRADELEC · LONDON NW10

COMMUNICATION ACOUSTICS

Miniature Electro-Magnetic Microphone and Earphone Inserts

(Items illustrated are only part of the range.)

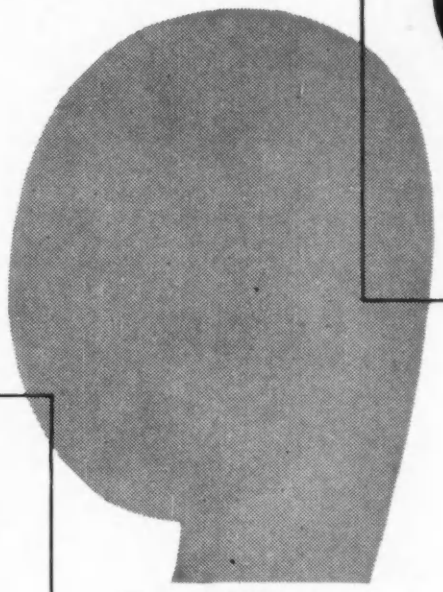

...For Military and Commercial equipments...

in fact, for nearly every application there is, within the complete Amplivox range, a suitable microphone or earphone insert. Whether to the stringent NATO Specifications for performance in Military Equipments or, for example, to the tone and acceptable appearance requirements for use in Hearing Aids, every Amplivox miniature acoustic insert is subject to the same care in Design, precision and efficiency in Manufacture, and searching Inspection.

and other products *Communication Systems · Headphones and Headsets Earphone and Microphone Inserts · Communication Helmets Stethophones · Microphone Assemblies Ear-Defenders · Extruded Cordage and Cables*

Enquiries to:

AMPLIVOX LIMITED INDUSTRIAL DIVISION

52-53 Margaret Street, London W.1.
Telephone: LANgham 7918

Cressall
HEATERS

for Industry and Transport

CARTRIDGE HEATING UNITS

Cartridge elements enclosed in metal tubes are designed to be used for the local heating of metal parts such as dies and moulds. They are made in two standard diameters and several lengths.

BAND HEATING UNITS

These units are intended for clamping round cylindrical surfaces for local heating. Of the two types available, one is of light and flexible construction and the other is preformed and totally encased.

CRESSALL STEEL JACKETED HEATER UNITS

For use in conditions of severe shock and vibration such as space heating on public transport and for heating moulds and platens. Units with alternative terminal arrangements are available.

THE CRESSALL MANUFACTURING CO. LTD. *(A subsidiary of The Expanded Metal Co. Ltd.)*

Eclipse Works, Tower Street, Birmingham 19
Tel: Aston Cross 2666

London Office: Burwood House, Caxton St., London, S.W.1
Tel: ABBey 7766

Expamet | Cressall

A.I.D. and A.R.B. approved

'ENGLISH ELECTRIC'

Britain's leading manufacturers of 'C' Cores

'ENGLISH ELECTRIC' introduced 'C' Cores to Britain and established the Standard Inter-Service Range in conjunction with the Radio Components Standardisation Committee. The full RCS range of 'C' Cores and a comprehensive range of accessories are AVAILABLE FROM STOCK. *Enquiries for 'C' Cores should be made to The* ENGLISH ELECTRIC *Company Limited, Transformer Sales & Contracts Section, East Lancashire Road, Liverpool, 10. Telephone AINtree 3641.*

THE ENGLISH ELECTRIC COMPANY LIMITED, MARCONI HOUSE, STRAND, LONDON, W.C.2

Transformer Department, Liverpool

WORKS: STAFFORD · PRESTON · RUGBY · BRADFORD · LIVERPOOL · ACCRINGTON

TFL.28 B7

HASSETT & HARPER

STANDARD ELECTRONIC RACKS, CABINETS & CONSOLES

STANDARD ELECTRONIC RACKS

4'x19" 6'x19" 6'x24"

AVAILABLE WITH SOLID SIDES AND BACK
OR HINGED SIDES AND BACK
OR HINGED SIDES AND HINGED BACK
OR TOTALLY ENCLOSED

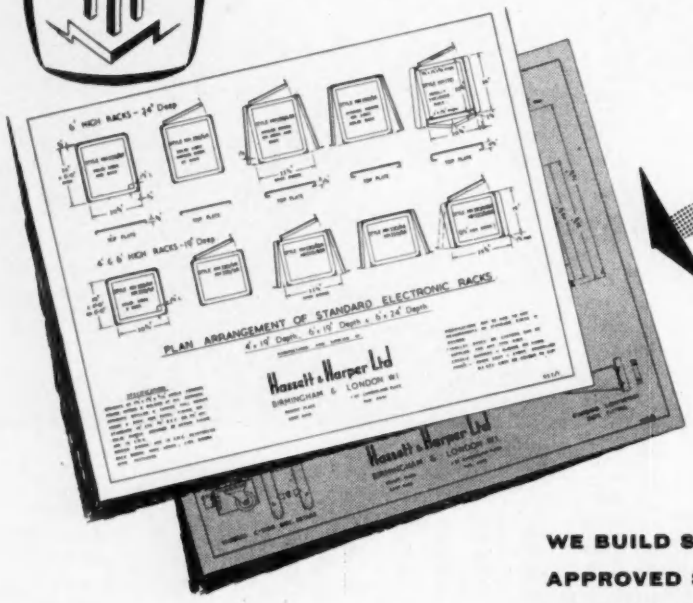

WRITE FOR THESE DATA SHEETS

WE BUILD STANDARD RACKS TO MINISTRY APPROVED SPECIFICATION—THESE CAN BE MODIFIED TO YOUR REQUIREMENTS

Hassett & Harper Ltd

REGENT PLACE · BIRMINGHAM · 1

Telephone: **CENTRAL 6418**

LONDON SHOWROOM: 1 GT. CUMBERLAND PLACE W.1 Tel: PAD. 4691

J3929

..and now the R.44

-for piercing *through* Templates!

BRITISH

WIEDEMANN
Turret Punch Press

Piercing through templates, this new Wiedemann model gives faster than ever piercing on longer runs. Templates are fully protected—the press cannot trip until the punch has fully entered the template opening. Rack or standard gauges are available if required.

Punching Pressure ... ... 30,000 lb.
Throat depth 28" ... 1 HP. Motor
16, 18 or 20 turret stations

There's a Wiedemann Turret Punch Press for every short and medium run piercing job. Hand or power—15,000 to 160,000 lb. punching pressure.

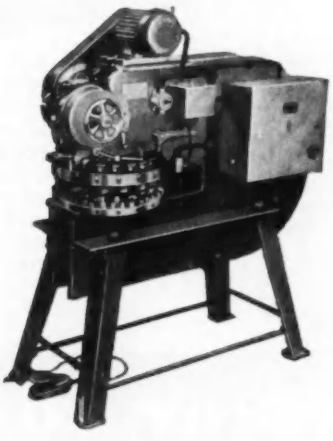

Write for the new Wiedemann Brochure.

DOWDING & DOLL LTD
346 KENSINGTON HIGH STREET, LONDON, W.14
Telephone: WESTERN 8077 (8 lines) Telegrams: ACCURATOOL HAMMER LONDON

143

Putting two and two together and making five ! At least, that's how it appears when you consider the saving in time and cost by changing over to tapping screws.
Without doubt, the tapping screw does display a number of very definite advantages over the conventional machine screw. It obviates the use of nuts. With its self-locating point, it forms its own thread and eliminates a separate and expensive tapping operation.
It makes for easier assembly, is stronger, cheaper and faster. And when used in conjunction with the Phillips recessed head, designed for power driving without damage to either work or worker, it is obviously safer. Putting two and two together, the tapping screw simply ensures a better job.
Why not change over to tapping screws and prove it for yourself?

Linread *tapping screws for economy and safety*

LINREAD LTD. COX ST. BIRMINGHAM 3

SLOTTED AND PHILLIPS RECESSED HEAD MACHINE SCREWS AND TAPPING SCREWS • HIGH TENSILE HEXAGON HEAD BOLTS AND SETSCREWS
AIRCRAFT BOLTS, SCREWS AND RIVETS • SEMS • RIVNUTS • CUSTOM DESIGNED COLD FORGED FASTENERS • ALEX SCREWPLUGS.

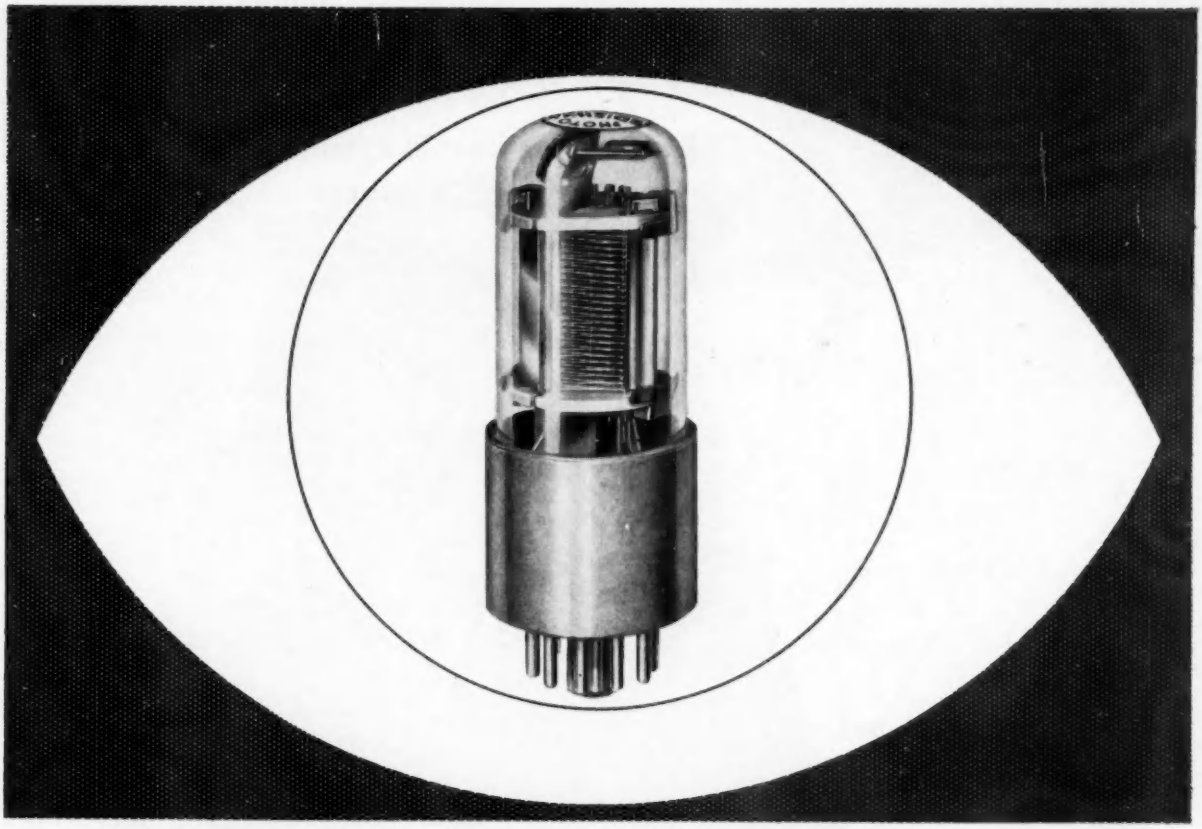

Announcing
two new EDISWAN Photomultipliers

We are pleased to announce two new Ediswan Photomultipliers: Type 27 M12 and Type 27 M13.
Both are based on the well-known Ediswan Photomultiplier Type 27 M1.
Here are brief details of the new types (further particulars will be gladly given on request):

27 M12		27 M13	
Nine-stage Photomultiplier specially designed for use in aircraft and other locations where strong vibration is experienced.		Seven-stage Photomultiplier with twin anodes. These provide a double output, which remains well matched under all conditions.	
Base:	Flying Lead	*Base:*	11 pin sub-magnal
Cathode:	Blue Sensitive	*Cathode:*	Blue Sensitive
Av. Cathode Sensitivity:	20 μA/lumen	*Av. Cathode Sensitivity:*	15 μA/lumen
Max. Anode Current:	1 mA	*Max. Anode Current:*	1 mA
Typical Operation:		*Typical Operation:*	
Volts per stage	65V	Volts per stage	125V
Volts anode to secondary cathode	65V	Volts anode to secondary cathode	50V
Sensitivity (white light)	1·0 A/lumen	Sensitivity (white light)	2·0 A/lumen
Average Current Amplification	60,000	Average Current Amplification	13,000
List Price: £18.0.0		*List Price:* £16.0.0	

Other Photomultipliers in the Ediswan range.

27 M1 Standard high sensitivity type (9-stage)	List price £15.0.0.
27 M2 Lower sensitivity (9-stage) type	List price £8.0.0.
27 M3 Sensitive to near ultra violet (9-stage)	List price £16.0.0.

SIEMENS EDISON SWAN LIMITED
AN A.E.I. COMPANY
155 CHARING CROSS ROAD, LONDON, W.C.2 AND BRANCHES
Phone: GERrard 8660. Grams: Sieswan, Westcent, London

CRC 16/5

Burgess new V3—a completely new mechanism—ten million operations *minimum*—new family of associated low force actuators—double pole switches. Full details in issue number 2 of "Micro Switchcraft."



Micro Switchcraft by

BURGESS

THE BRITISH MICRO SWITCH DESIGN
AND MANUFACTURING SPECIALISTS

BURGESS PRODUCTS CO. LTD., MICRO SWITCH DIVISION, DUKES WAY, TEAM VALLEY, GATESHEAD 11. Tel: Low Fell 75322 Telex: 53-229

Everybody wants

EMITAPE

the World's best magnetic tape!

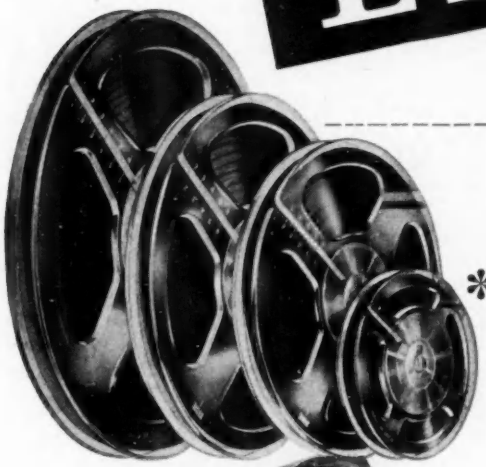

EMITAPE 88 — *General Purposes.*

EMITAPE 99 — *Long Play, giving 50% increased playing time.*

* 4 SPOOL SIZES

to fit all standard magnetic tape recorders

3" MESSAGE **5" JUNIOR**

5¾" CONTINENTAL **7" STANDARD**

* HIGHEST TECHNICAL STANDARDS

- High sensitivity
- Low noise level
- Low print-through factor
- Freedom from curl and stretch
- Anti-static
- Low head wear

* EMICASE

solves storage problems

protects spools from dust

allows easy identification of leader tapes

TYPE No.	TITLE	SIZE	LENGTH APPROX.	EMITAPE IN "EMICASE"	PRICE WITHOUT "EMICASE"
88/6E	"Junior"	5" dia.	600′	£1 . 3 . 6	£1 . 1 . 0
★99/9E	"	5" dia.	850′	£1 . 10 . 6	£1 . 8 . 0
88/9E	"Continental"	5¾" dia.	850′	£1 . 10 . 6	£1 . 8 . 0
★99/12E	"	5¾" dia.	1200′	£1 . 17 . 6	£1 . 15 . 0
88/12E	"Standard"	7" dia.	1200′	£1 . 17 . 6	£1 . 15 . 0
★99/18E	"	7" dia.	1800′	£2 . 12 . 6	£2 . 10 . 0

★ *LONG PLAY—50% increased playing time.*

EMITAPE—*the magnetic recording tape with the world-wide reputation!*

E.M.I. SALES & SERVICE LTD *(Recording Materials Division)* **HAYES · MIDDLESEX**

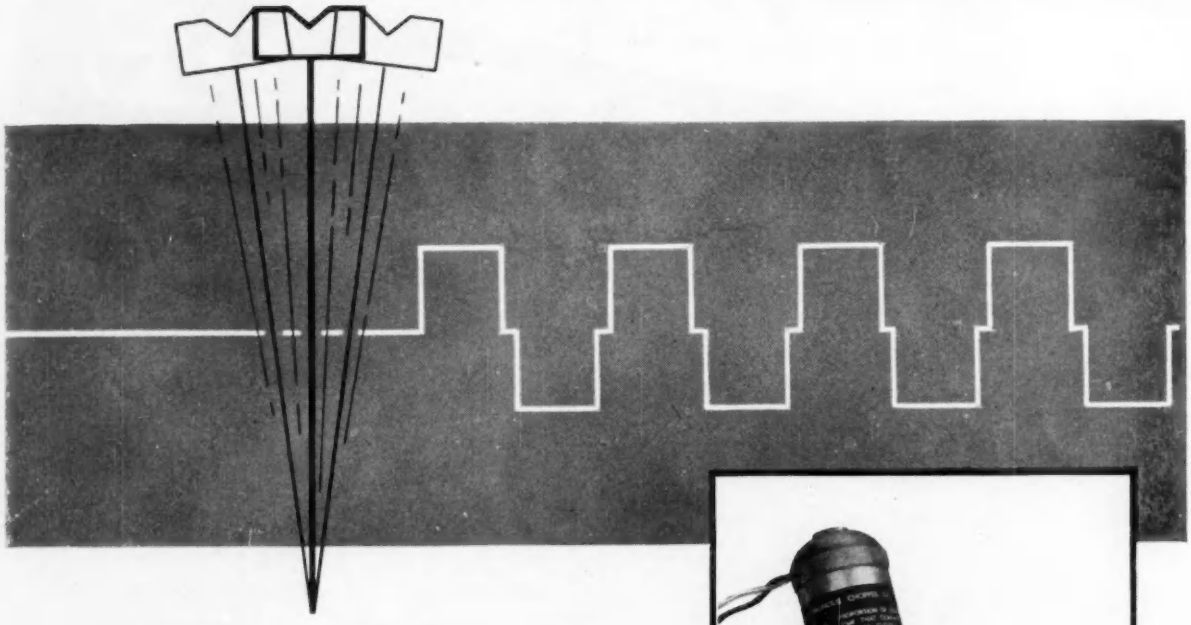

METROVICK 'SYNCHRONOUS CHOPPER' TYPE CK

SOME FEATURES

- ★ Low Electrical Noise (designed for high-impedance measurements)
- ★ Contact Settings Readily Adjustable
- ★ Small Size (Fits standard B9A valve base)
- ★ Hermetically Sealed

METROPOLITAN-VICKERS
ELECTRICAL CO LTD · TRAFFORD PARK · MANCHESTER 17

An A.E.I. Company

G/R 801

You are invited to write to The M-O Valve Company Ltd for this free comprehensive 30-page Catalogue

"G.E.C. valves and cathode ray tubes for industry"—publication OV4265 — includes rating tables and equivalents lists for the range of G.E.C. transmitting and industrial valves and instrument cathode ray tubes, manufactured by the M-O Valve Co., Ltd. This informative catalogue is invaluable to all engineers concerned with the design of electronic equipment.

Data Sheets . .
are available which provide all relevant information concerning G.E.C. electronic valves and devices.

M-O VALVE COMPANY LIMITED
BROOK GREEN, HAMMERSMITH, LONDON, W.6
Makers of G.E.C. High Grade Radio Valves and Cathode Ray Tubes
A subsidiary of The General Electric Company Limited

–for Industrial Research

A simultaneous dual-channel tape recorder

Series 3C/FN

THE Ferrograph Series 3C/FN, illustrated here, is a simultaneous dual-channel instrument, using staggered heads, which offers special facilities to those engaged in medical, aeronautical and other scientific research. Besides the normal ability to record simultaneously time pulses on one track and intelligence on the other, it becomes immediately obvious that many forms of comparative measurement, stereophonic sound, or indeed, any two activities capable of being translated into electrical phenomena (within its frequency and phase shift limitations) can be recorded simultaneously and replayed when required. Thus, the scope of such an instrument, when used for Research purposes, is almost unlimited.

Our wide experience in the design, manufacture and application of high precision magnetic tape recording equipment in Industry will be made freely available to you on request.

The Incomparable **Ferrograph**

BRITISH FERROGRAPH RECORDER CO. LTD., 131 Sloane Street, London, SW1. Tel: SLOane 2214/5 & 1510

A Subsidiary of Wright and Weaire Limited

Means to ends . . .

The reliability of modern instrumentation argues the efficiency not only of the instruments themselves but of the specialised materials and components upon which their performance depends. The contribution that Johnson Matthey make to progress in automatic process control—and other important fields—is unobtrusive, but is none the less vital.

★ Precision drawn resistance wires . Nickel cathode
★ tubes . Grid support wire . Contacts and contact
★ springs . Rhodium electrodeposits .
★ Silvered mica capacitor plates . Fine fuse wires .
★ Platinum: rhodium-platinum thermocouples . Mallory
★ 73 Beryllium Copper wire and strip . Bourdon, capillary
★ and pointer tubes . Wires for resistance thermometry .
Silver brazing alloys.

Specialised Products of

Johnson Matthey

Technical data sheets describing the products listed above are available on request.

JOHNSON, MATTHEY & CO., LIMITED, HATTON GARDEN, LONDON, E.C.1. Telephone: Holborn 6989

Vittoria Street, Birmingham, 1. Telephone: Central 8004. 75-79 Eyre Street, Sheffield, 1. Telephone: 29212

E2

GSV

Manufacturers of: **DIRECTIONAL AND OMNI-DIRECTIONAL VHF. AND UHF. ARRAYS, AERIAL FILTERS AND MATCHING NETWORKS, TO SUIT ALL CLIMATES**

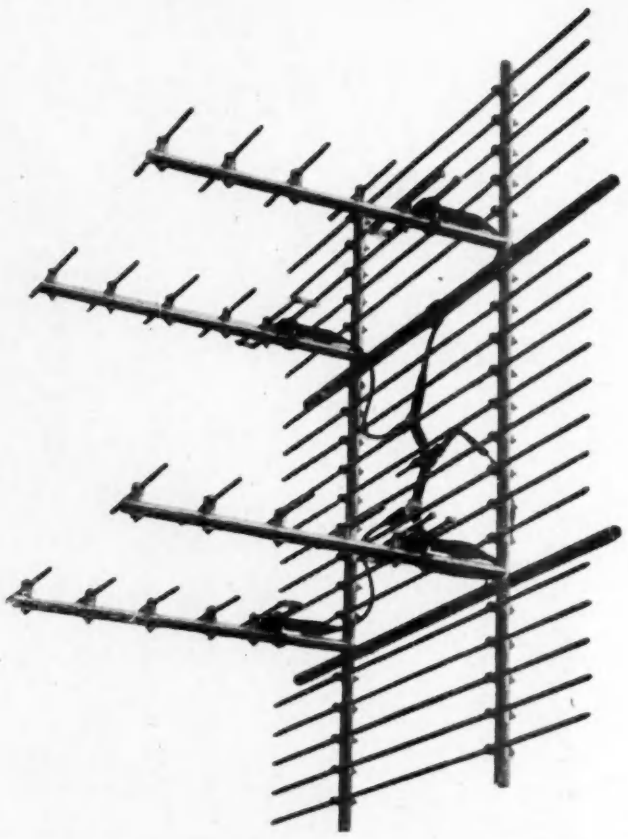

G.S.V. ***products are specially designed to meet the exacting conditions in all parts of the world — including internally heated aerials for use where severe icing is experienced — and are at present in operation in more than 50 countries.***

Among the principal users of G.S.V. Aerials are the following:

AUTOMOBILE ASSOCIATION, AUTOMATIC TELEPHONE & ELECTRIC CO., BRITISH & FOREIGN POST OFFICES, CENTRAL REDIFFUSION, CROWN AGENTS, ECKO ELECTRONICS, GENERAL ELECTRIC CO., HOME OFFICE, INTERNATIONAL AERADIO, IRAQ PETROLEUM, I.T.A., MARCONI'S WIRELESS TELEGRAPH CO., MINISTRY OF SUPPLY, MINISTRY OF TRANSPORT & CIVIL AVIATION, MULLARD, MURPHY, PYE TELECOMMUNICATIONS, REDIFON, SHELL PETROLEUM, STANDARD TELEPHONES & CABLES, TRAWLER & WHALING FLEETS, TAXI SERVICES, POLICE, FIRE & AMBULANCE SERVICES, ETC.

G.S.V. Engineers have a wide experience of aerial problems and would welcome your enquiries.

G.S.V. (MARINE & COMMERCIAL) LIMITED

KNIGHT ROAD · STROOD · KENT · TELEPHONE: STROOD 78255/6

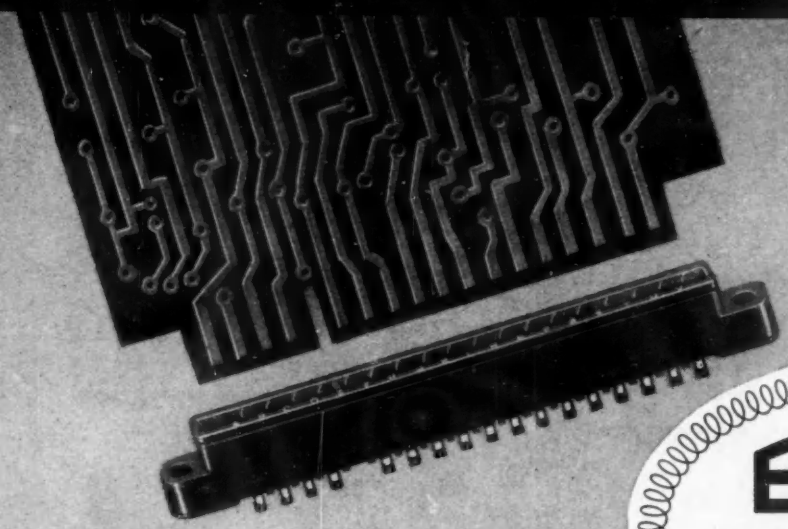

This K-18 connector is
ACTUAL SIZE
—made under U.S licence from
Winchester Electronics Inc.

ELECTRO METHODS LTD OF STEVENAGE

— the foremost manufacturers of

printed circuit connectors

★

GOLD-PLATED CONTACTS
made from spring-tempered phosphor-bronze
provide low contact-resistance, prevent corrosion and facilitate soldering.

★

MELAMINE MOULDINGS
conforming to B.S.S. 1322
provide high arc-resistance, high dielectric and mechanical strength.

NOW AVAILABLE FOR PROMPT DELIVERY

SERIES 'K'
with 6, 12, 18 & 22 contacts
CONTACT CENTRES .156"
END FIXING
Solder-cups or rivet ends

*

SERIES 'KKM'
with 6, 10, 12, 15, 18 & 22 contacts
CONTACT CENTRES .156"
END FIXING
Solder-eyelets

*

SERIES 'KM'
with 14, 21, 31 & 37 contacts
CONTACT CENTRES .078"
END FIXING
Solder-eyelets

*

Polarising-pins can be fitted in any position (This applies to each series)

Full technical data and illustrated leaflets forwarded on request
ELECTRO METHODS LTD.
17-41 Caxton Way, Stevenage, Herts.
Telephone Stevenage 780

Louis Pasteur

had to work fasteur to avoid coming to terms with any of his germs!

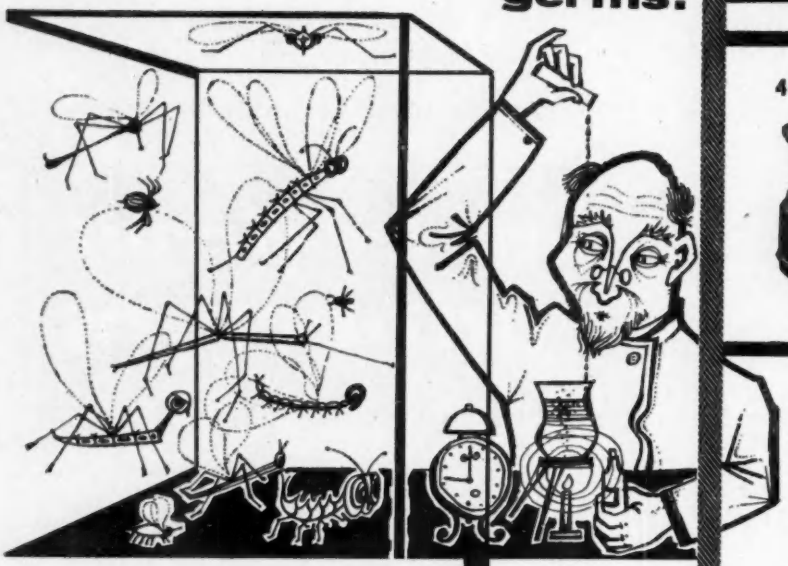

THERMOCOUPLE TEST SET

Cat. No. 7556

A potentiometer, wheatstone bridge, galvanometer and potential source with series resistance all forming one compact, portable unit.

40kV ELECTROSTATIC VOLTMETER

Cat. No. 11314



Direct reading up to 40 kV d.c. or 40 kV r.m.s. a.c. regardless of waveform: the instrument employs a specially designed vane. A bright lightband is projected on to the scale, which is 15 cm. long. Lamp may be operated from 4V battery or 200-250V a.c. mains. No critical levelling. Limit of error ± 2% f.s.d. Carefully insulated to eliminate leakage and discharge errors.

D.C. AMPLIFIER AND MICROVOLTMETER

Cat. No. 11343/11353



The most robust and stable of low level d.c. amplifiers: this is achieved by the use of a self-contained oscillator, a high feed-back factor and efficient stabilising methods in the feed-back circuit

Scale 10μV-0-10μV. Zero drift ± 1μV per day. Noise level: less than 10^{-15} watts.

Pasteur was one of the greatest discoverers in medical history—and his work has benefited millions of men, women and children. His work is carried on by scientists all over the world who are working, sometimes at great risk to themselves, to improve the lot of man physically and towards improving his environment. Many of these men use Pye Scientific Instruments, because of the precision and reliability which are assured by the designers and craftsmen in the W. G. Pye factory at Cambridge.

Please address complaints about this advertisement or requests for information on Pye Chemical or Physical Instrumentation to:—

SCIENTIFIC PYE INSTRUMENTS

W. G. PYE & CO., LTD. GRANTA WORKS, NEWMARKET ROAD, CAMBRIDGE

Telephone: Cambridge 54411 Telegrams: Pye-Cambridge

VAPOUR-COOLED VALVES

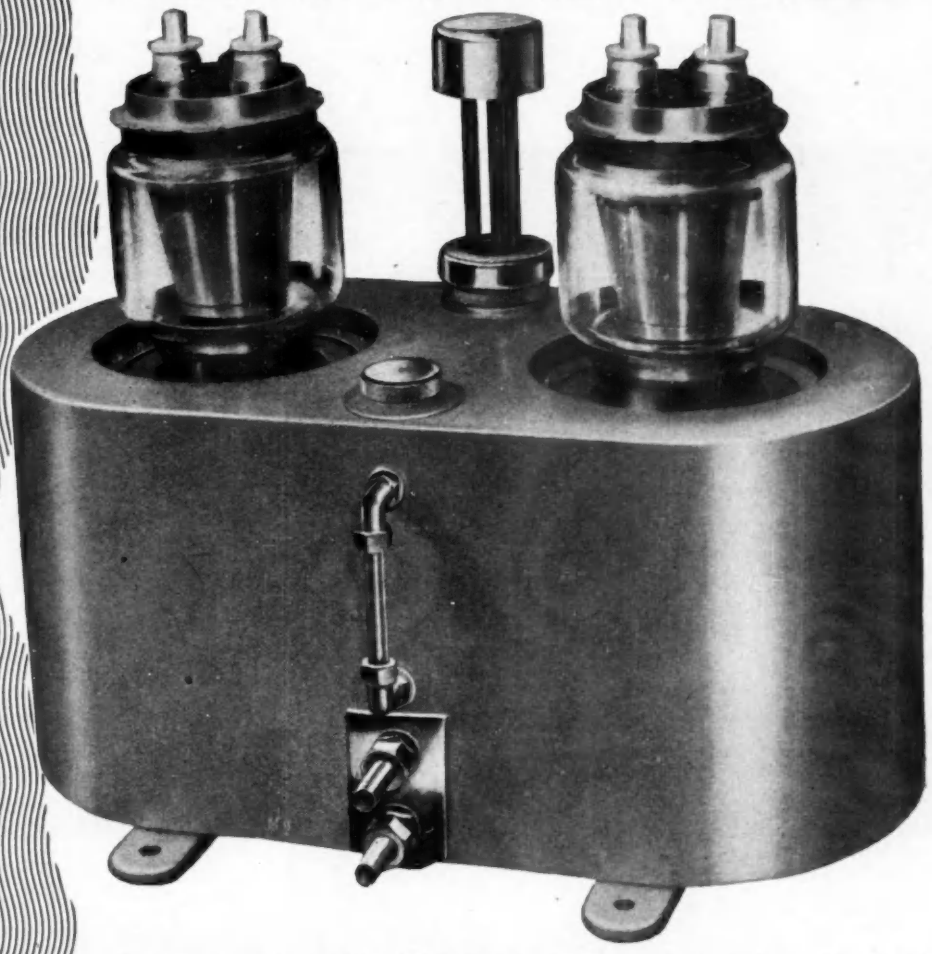

Conditions sometimes exist both in industry and in communications where neither forced air cooling nor water cooling of high power valves is entirely satisfactory. Air may be so dirt laden that the cleaning of filters and radiators calls for undue effort and cost and at the same time water may be expensive, scarce or otherwise unsuitable.

Under such conditions the E.E.V. vapour-cooled valves may give just the advantages needed: low water cost; built-in protection against failure of water supply; quiet operation; and greater overload capacity. Many types in the E.E.V. range of forced air and water-cooled valves are now available as vapour-cooled versions. Typical examples are

Forced air-cooled	Water-cooled	Vapour-cooled
BR1102	BW1102	BY1102
BR1121	BW1121	BY1121
BR189	BW189	BY189

'ENGLISH ELECTRIC'

ENGLISH ELECTRIC VALVE CO. LTD. *Chelmsford, England*
Telephone: Chelmsford 3491

AP101

let us demonstrate these superb

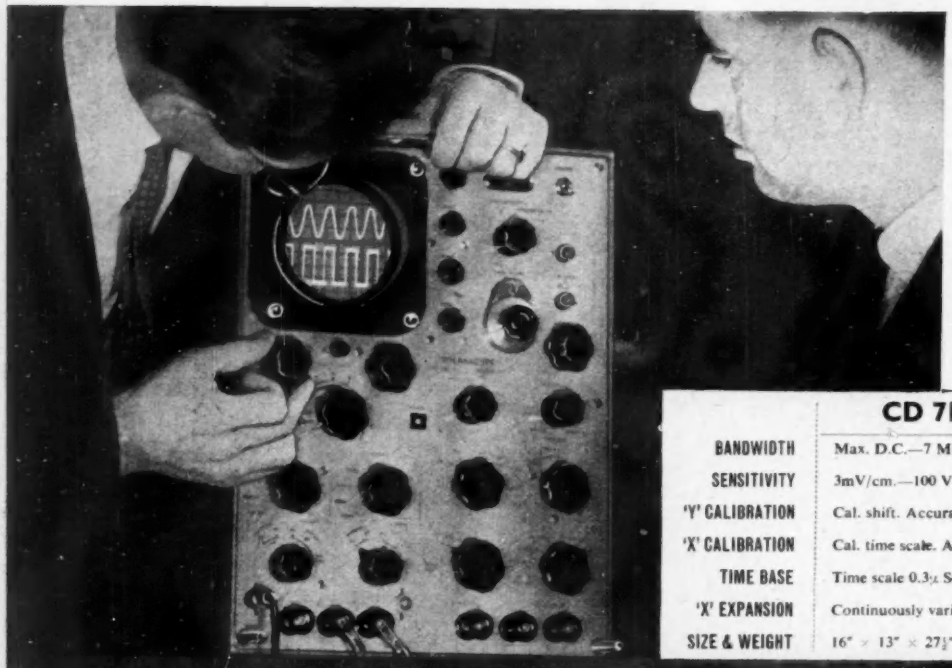

Have you seen the *new* Solartron Double Beam CD 711 Solarscope being put through its paces? Now for the first time, you can choose a double beam 'scope of Solartron quality, embodying all the latest design features, and built to the highest standards of electronic engineering.

	CD 711 DOUBLE BEAM	CD 715
BANDWIDTH	Max. D.C.—7 Mc/s. at 100mV/cm.	Max. D.C.—20Kc/s.
SENSITIVITY	3mV/cm.—100 V/cm.	10 mV/cm.—10V/cm.
'Y' CALIBRATION	Cal. shift. Accuracy ±5%	Special facilities
'X' CALIBRATION	Cal. time scale. Accuracy ±5%	Special facilities
TIME BASE	Time scale 0.3μ Sec./cm.—3 Sec./cm.	Sweep time 10 Sec. to 0.1 Sec.
'X' EXPANSION	Continuously variable × 10	×1, ×0.5, ×0.2, ×0.1, ×0.05
SIZE & WEIGHT	16" × 13" × 27½" deep. 110 lb.	14" × 10" × 20" deep. 47 lb.

Solartron make the finest electronic equipment:

PRECISION INSTRUMENTS
POWER SUPPLIES
COMPUTERS
TRANSFER FUNCTION ANALYSER
RADAR SIMULATORS
ELECTRONIC READING AUTOMATON
CYBERNETICS
INDUSTRIAL CONTROLS

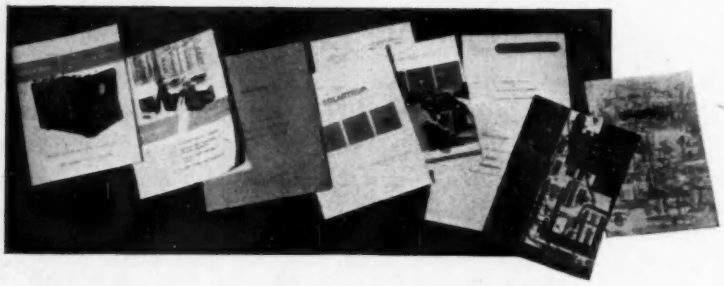

Literature is available

call in a SOLARTRON

THE SOLARTRON ELECTRONIC GROUP LIMITED

SOLARTRON oscilloscopes

See also the new CD 643, the most accurate measuring oscilloscope in production . . . and the new CD 814, which, particularly considering its price, is a quite remarkable contribution to technical education and general use. The Solartron range of eight solarscopes covers every known application, based on intensive analysis of oscilloscope users' requirements. Specialist Instrument Engineers will visit to advise on the choice of the right 'scope for your purpose.

PRICES

Home & Export (F.O.B., packing extra)

CD 711	£320
CD 715	£460
AD 557	£275
CD 518	£225
CD 568	£210
CD 513	£220
CD 523S	£265
CD 814	£115
CD 643	£490

AD 557	CD 518	CD 568	CD 513	CD 523S	CD 814	CD 643
Max. D.C.—1 Mc/s.	Max. D.C.—5 Mc/s.	Max. D.C.—5 Mc/s.	Max. D.C.—10 Mc/s.	Max. D.C.—10 Mc/s.	Constant 1 c/s.–8 Mc/s.	Constant D.C.–15 Mc/s.
3 mV/cm.—100 V/cm.	0.25 V/cm.—5 V/cm.	0.25 V/cm.—5 V/cm.	1 mV/cm.—10 V/cm.	1 mV/cm.—10 V/cm.	30m V/cm.—30 V/cm.	100 mV/cm.—60 V/cm.
Cal. shift ±5%	Shift meter. Accuracy ±3%	Shift meter. Accuracy ±3%	Cal. sensitivity Accuracy ±10%	Cal. sensitivity Accuracy ±10%	Comparison method Accuracy ±5%	Cal. shift. Accuracy ±2%
Cal. time scale. Accuracy ±10%	'Cal Pips' and sine wave. Accuracy ±2%	Sine wave. Accuracy ±2%	Cal. time scale Accuracy ±10%	Cal. time scale Accuracy ±10%	'Cal Pips' Accuracy ±5%	'Cal Pips' and brightup Accuracy ±2%
Time scale. 1μ Sec./cm. —1 Sec./cm.	Sweep time 100m. Sec. —1μ Sec.	Sweep time 100m. Sec. —1μ Sec.	Time scale 0.1μ Sec./cm. —1 Sec./cm.	Time scale 0.1μ Sec./cm. —1 Sec./cm.	Repetition Rate 6 c/s—185 Kc/s.	Time scale 0.1μ Sec/cm. —100m. Sec./cm.
Continuously variable × 10			×0.5, ×1, ×2, ×5	× 0.5, × 1, × 2, × 5	Continuously variable × 10	Continuously variable × 100
16½" × 10" × 22" deep. 70 lb.	12" × 9" × 18" deep. 40 lb.	12" × 9" × 18" deep. 40 lb.	16½" × 10" × 22" deep. 70 lb.	16½" × 10" × 23" deep. 70 lb.	14½ × 10½" × 19½" deep. 43 lb.	20" × 14½" × 27½" deep. 140 lb.

on request.

Solartron instrumentation has a key role in major scientific advances. Here, for example, is a Solarscope used in the development of ZETA. Stringent environmental tests by Service departments, prior to awards of Interservice Approval, have also made dramatic demonstrations of accuracy, robustness and sheer reliability under ardous conditions. You can *rely* on Solartron just as the Services do.

specialist instrument engineer

for expert advice and demonstration of the Solartron complete range of precision electronic instruments

THAMES DITTON • SURREY • Telephone: EMBerbrook 5522 • Cables: Solartron, Thames Ditton

Do YOU know about

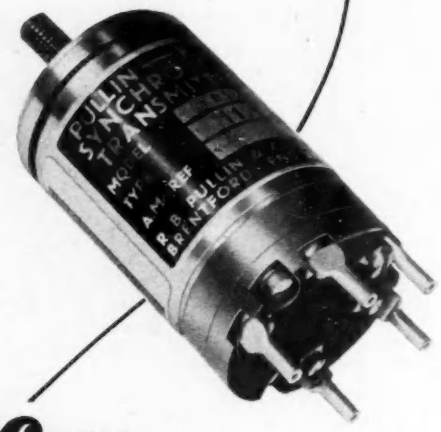

PULLIN Kearfott

SYNCHROS & SERVOCOMPONENTS

These are new—and if you do not know about the Pullin-Kearfott range of high precision synchro and servocomponents, fill in and post the coupon below or 'phone for our up-to-the-minute catalogue of Pullin-Kearfott precision products. It gives descriptive and technical information on *Size* 11 *Synchros and 7-Terminal Resolver*, *Size* 10 *Servomotor* and *Motor Generator*, **now in production**—and other servocomponents planned and available shortly.

Included in the catalogue are the Pullin low voltage motors, together with a range of high efficiency permanent magnet D.C. motors in standard synchro housings.

Please send me full details of the Pullin-Kearfott range.

Name _____

Address _____

_____

R. B. PULLIN & CO. LTD.
PHOENIX WORKS
GREAT WEST ROAD, MIDDLESEX.

Telephone:
EALing 0011-3 and 3661-4

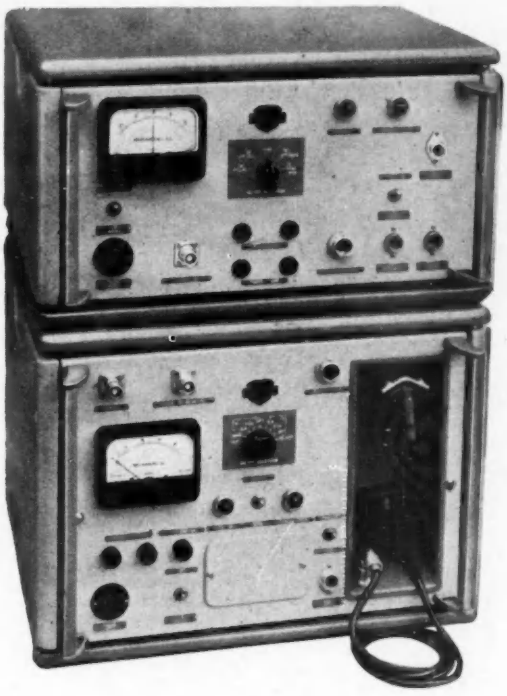

music quality transmission in band 5 with

NEW 600 Mc/s LINK

This new Mullard development will be of particular interest to broadcasting authorities with requirements for fixed or mobile music links.

It has an obvious potential in OB applications, particularly in areas where the lower VHF bands are overcrowded.

Frequency band	660 to 665 Mc/s.
Audio response	50 c/s to 10 kc/s ± 2dB
Modulation system	F.M.
Deviation	35 kc/s.
Transmitter output power	10 watts
Audio input	0dbm (Alternatively a local handset may be used.)
Output	+10dbm (Alternatively 0.5 W into loudspeaker).
Power supplies	110–120 & 200–250 volts A.C. mains

Mullard

Mullard is the trade mark of Mullard Limited.

MULLARD EQUIPMENT LIMITED

MULLARD HOUSE

TORRINGTON PLACE · LONDON W.C.1

ME6'

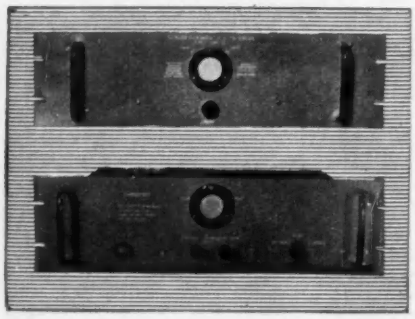

Remote Chronoscopic Indicator for providing instantaneous and accurate indication of the frequency of A.C. mains. It is used in conjunction with a crystal controlled frequency generator, and has many applications. A frequency change of one in 10,000 can be readily seen on the chronoscope tube

If it's Electronic...

and you want it Designed and Developed or produced*

to your Specification

Consult

P.A.M·LTD

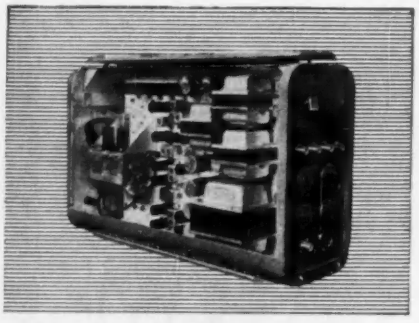

Mobile sound and vision receiver designed and produced by P.A.M. LTD. for Marconi's Wireless Telegraph Company Limited. It is primarily intended for use in studio and mobile control rooms

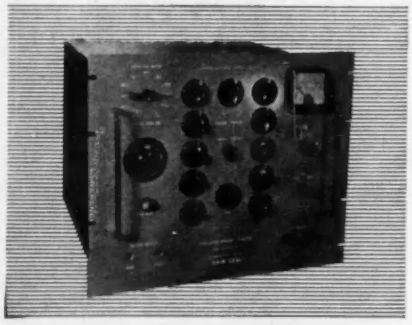

A crystal controlled substandard frequency generator covering normal power frequencies and designed for rack mounting. Various forms of this instrument have been designed and developed by P.A.M. LTD.

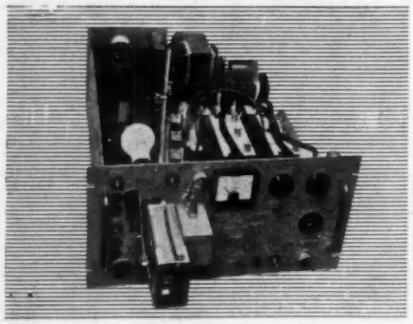

Camera Recording surge voltmeter developed from the original design of C.E.A.'s research laboratories. A number are being installed at various points on the grid system

P.A.M. LTD. Electronics Department combines the technique of several companies, long-established in the Electronic field, with the extensive modern production resources of P.A.M. LTD.

Examples of recent work are illustrated.

P.A.M. LIMITED
Electronics Department
MERROW, GUILDFORD, SURREY.
Telephone: Guildford 2211

One of the group of Companies associated with the Southern Areas Electric Corporation Limited

**Whichever stage of the struggle you've reached, we can save you time and trouble - maybe money too - write or 'phone without delay*

CINCH phono plugs and sockets

The design and dimensions are to the international standard. With the sockets, backing plates can be supplied for complete insulation from the chassis.
Please write for Leaflet No. 4992

CINCH

CARR FASTENER CO LTD

STAPLEFORD · NOTTINGHAM

Sole Selling Representatives: THE BENJAMIN ELECTRIC LTD · TOTTENHAM, N.17 · TEL: TOTTENHAM 9721

Smee's 127

HIGH FREQUENCY SIGNAL GENERATOR TYPE 201

Some of the main features are;—

- ★ **Frequency range from 30 kc/s–30 Mc/s**
- ★ **Crystal calibration**
- ★ **Harmonic components less than 1 per cent**
- ★ **Film scale giving actual scale length of 4 ft on each frequency range**
- ★ **90 ; 1 slow motion drive with logging scale**
- ★ **High output of 5 volts**
- ★ **Output level constant over entire frequency range**
- ★ **Modulation depth variable from 0–100 per cent**
- ★ **F.M. with A.M. less than 300 c/s**

IMMEDIATE DELIVERY **PRICE £220 NETT**

Full details of this or any other Airmec instrument will gladly be forwarded upon request.

AIRMEC LIMITED **HIGH WYCOMBE BUCKINGHAMSHIRE ENGLAND**

Telephone : High Wycombe 2060 *Cables :* Airmec High Wycombe

MICROWAVE COMMUNICATIONS ISSUE

Vol. 30
No. 363

MAY 1958

Electronic Engineering

Managing Editor: H. G. FOSTER, *M.Sc., M.I.E.E.*

CONTENTS

Microwave Communications		**225**
A Survey of Microwave Radio Communication	*By W. J. Bray*	**226**
Microwave Line-of-Sight Propagation	*By M. W. Gough*	**237**
Tropospheric Scatter Propagation	*By G. Millington*	**248**
Microwave Link Development in the Radio Laboratories of the Post Office Engineering Department	*By C. F. Floyd and R. W. White*	**253**
G.P.O. Orders First All-Travelling-Wave-Tube Radio Links		**261**
Surveying For Microwave Radio Relay Systems	*By L. E. Strazza and R. C. S. Joyce*	**262**
Microwave Radio Toll Systems	*By E. W. Anderson*	**267**
Tropospheric Scatter Communication	*By G. L. Grisdale*	**272**
British Television Equipment for Yugoslavia		**275**
S.H.F. Radio Links Using Travelling-wave Output Amplifiers	*By G. Dawson and T. K. M. Korytko*	**276**
All Travelling-Wave Tube System	*By S. Fedida*	**283**
U.H.F./S.H.F. Portable Links in the BBC Television Service	*By T. H. Bridgewater*	**291**
Broadband Microwave Systems Employing U.H.F. Triodes	*By G. W. S. Griffith and B. Wilson*	**297**
Travelling-Wave Tubes in Radar and Communications	*By R. B. Coulson*	**302**
Travelling-Wave Tube Amplifiers	*By D. H. O. Allen*	**305**
Travelling-Wave Tubes for 4 000Mc/s	*By P. F. C. Burke*	**310**
Reflex Klystrons	*By A. H. Atherton*	**315**
Multi-Cavity Klystrons	*By V. J. Norris*	**321**
Coaxial-line Velocity Modulated Oscillator Valves	*By D. E. Lambert*	**324**
Backward Wave Oscillators	*By A. G. Stainsby*	**329**
Triodes and Tetrodes for U.H.F./S.H.F. Operation	*By C. A. Tremlett and A. D. Williams*	**335**
Ferrite Components in Microwave Systems	*By B. L. Humphreys*	**341**
U.H.F. Power Meter for Operation in the 2 000Mc/s Communication Band	*By J. K. Murray*	**345**
The White-noise Method of Measuring Crosstalk and Noise Interference in Multi-channel Telephone Link Systems	*By J. F. Golding*	**349**
Book Reviews		**352**
Electronic Equipment		**354**
Short News Items		**356**

CLASSIFIED ADVERTISEMENTS Page 1

INDEX TO ADVERTISEMENTS Page 167, 168

PUBLISHED MONTHLY on the last Friday of the preceding month by:

MORGAN BROTHERS (PUBLISHERS) LIMITED
at 28, Essex Street, Strand, London, W.C.2.
Telephone: CENtral 6565 Telegrams: 'Lectroning, Estrand, London'
Annual Subscription: Home and Overseas £1.16.0 post free, Canada and U.S.A. $5

Travelling wave tubes for U.H.F. communications



LA4-250 Travelling wave tube with permanent magnet periodic focusing.

Original work on the development and production of travelling wave tubes is one of the major contributions Mullard is making in the advance of U.H.F. communications. Abridged data for four of these special types is shown here. Full details of these and other U.H.F. & S.H.F. tubes, including klystrons, backward wave oscillators and disc seal valves, are available from the address below.

Mullard

Type	Description	Frequency Range (kMc/s)	Power Output (W)	Noise factor (dB)	Power Gain (dB)	Helix Volts (V)	Beam Current (mA)
LA4-2	Low noise signal amplifier	3.6 to 4.2	0.002	<9.5	20	600	0.15
LA4-250	Intermediate power amplifier	3.6 to 4.2	0.25	—	25	1150	3.5
LB4-2	Power amplifier	3.6 to 4.2	2.0	—	25	1200	25
LA9-3	Broadband signal amplifier	7 to 11.5	0.005	16	25	1300	0.5

Mullard

COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT

Mullard Limited,
Mullard House, Torrington Place, London, W.C.1. LANgham 6633.

MVT350

ELECTRONIC ENGINEERING

VOL. 30 No. 363

MAY 1958

Microwave Communications

THE wideband multi-channel microwave radio link is a branch of communications that has expanded enormously of late years and it owes much of its development to the radar techniques originated during the war.

It has now become one of the accepted methods of carrying from point to point a large number of separate telephone channels or, alternatively, a wide band television signal.

The multi-channel radio link itself is no new thing for much development work was carried out before the war in the v.h.f. band and valuable contributions to the techniques were made on both sides of the Atlantic. Interest in the band of frequencies above 300Mc/s for commercial purposes began to grow in 1930 onwards and one of the first microwave links was set up on an experimental basis in 1931. This was the microwave link across the English channel between Dover and Calais. Operating at what was then regarded as an extremely high frequency of 1 700Mc/s with a radiated power of about half a watt it was regarded as an enormous advance on the techniques of the day and it demonstrated that the little used band of frequencies from 300 to 3 000Mc/s—the Ultra High Frequency Band—was ripe for exploitation.

There followed in 1934 what was probably the world's first microwave link operating on a regular commercial basis between the airports of Lympne in Kent and St. Inglevert in France, a distance of some 35 miles.

A halt to further progress was caused by the outbreak of war but the many radar techniques of the war period and the advent of special types of valves such as the klystron and the travelling wave tube, which were developed for radar purposes, were to make a great contribution when hostilities ceased.

One of the first microwave links to take advantage of the new techniques was installed in 1949 between London and Birmingham. This link operated at a frequency of 900Mc/s and was designed to carry a single channel television link from London to the BBC's new television transmitter at Sutton Coldfield. It was followed in 1952 by another microwave link on 4 000Mc/s from Manchester to Edinburgh to convey the BBC's television signals to Kirk o'Shotts.

Since then, similar systems have been installed in Europe and it is interesting to recall that in 1954 when the Coronation ceremonies were televised, an extensive network of microwave systems had been brought into being to link the countries of Europe for this occasion.

Investigations had also shown that the microwave link offered distinct possibilities for use in multi-channel telephony and in 1946 the British Post Office set up its own experimental link between London and Castleton, near Cardiff. It was used in 1949 to convey the BBC's television signal to Wenvoe and, although operating at a frequency of 200Mc/s, it was one of the first links to use frequency modulation for the transmission of television. Much valuable information was gained on the problems involved in the use of this form of modulation and the Post Office followed this installation by a single hop frequency modulated microwave link across the Moray Firth, carrying 240 separate telephone channels and designed to meet C.C.I.T.T. standards as far as conditions would permit.

The foregoing is a very brief account of the history and development of post war microwave communications but however incomplete this may be, reference should be made to enhanced possibilities that are suggested by tropospheric propagation.

It has been evident for a number of years that the propagation of microwaves could extend for distances considerably beyond the horizon and Marconi himself was one of the early pioneers in this respect.

Several theories have been put forward to account for this new phenomenon of tropospheric scatter propagation but the mechanism is not yet fully understood and much investigation remains to be carried out. It does, however, appear that long distance microwave propagation, including the bridging of the Atlantic, is within the bounds of possibility.

The world wide interest in microwave transmission and tropospheric propagation has grown to the extent that it was felt that the time is appropriate to present a survey of current British practice in this field and this month's issue has been given over to this purpose.

It deals principally with propagation, both line of sight and tropospheric, microwave systems and their essential components, such as valves. Radar and navigational devices have been excluded.

The amount of reading matter included in this issue is probably more than can normally be digested in a month, but the subject to be covered is an extensive one and care has been taken to make the survey as complete and as representative of British practice as is possible.

A Survey of MICROWAVE RADIO COMMUNICATION

By W. J. Bray*, M.Sc.(Eng.), M.I.E.E.

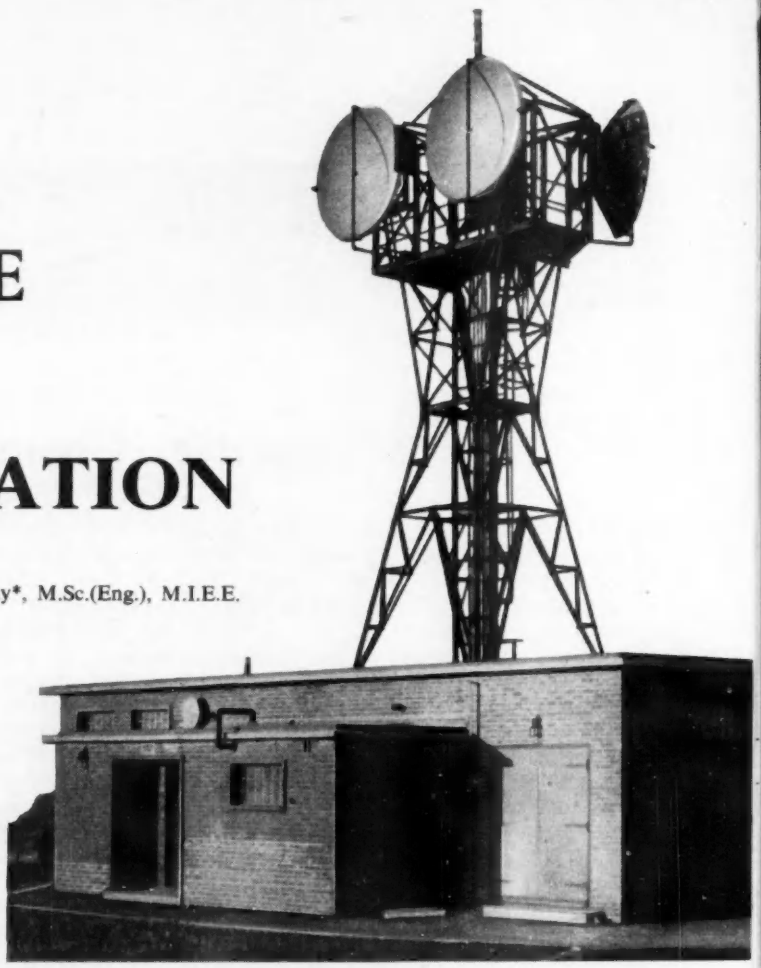

This article is a broad survey of line-of-sight and tropospheric forward-scatter radio communication systems operating in the frequency range from about 1 000 to 10 000Mc/s, for the transmission of multi-channel telephony and television signals. The applications of such systems, the transmission requirements, the factors determining the choice of frequency, and the basic equipment techniques are described. Possible future developments are also considered.

THIS article is a broad survey of microwave radio communication systems existing in the United Kingdom and elsewhere, and of current developments in this field. Most of the systems discussed are intended to operate on frequencies in the range 1 000 to 10 000Mc/s. They may be divided into two main classes:

(a) Low-power systems with line-of-sight paths between adjacent stations, the paths being some 10 to 50 miles in length[1-4].

(b) High-power systems with paths extending well beyond the visible horizon up to 200 miles or more long; these systems include 'tropospheric-scatter' systems[5-7].

Microwave communication systems with line-of-sight paths are rapidly assuming a position of considerable importance in the field of telecommunications and in many respects such systems are competitors to wire-line and coaxial-cable systems. A wide range of applications is possible, extending for example from systems providing a small number of telephone circuits to systems providing several thousands of telephone circuits or several television channels over distances of a thousand miles or more with the high standards of performance and reliability essential for national and international trunk circuits.

The increasing use of 'line-of-sight' microwave systems may be attributed to the following advantages:

(1) In some applications the capital cost and annual charges are less than for line or coaxial-cable systems of comparable capacity and performance.

(2) Microwave systems can often be installed more rapidly than line systems.

(3) Additional capacity can be provided quickly once a chain of relay stations has been established.

(4) Microwave systems are well adapted to the provision of communications in difficult terrain, particularly in sparsely populated, mountainous or densely wooded areas, where line systems may be impracticable or unduly costly.

There are however certain disadvantages which must be recognized and taken into account in the planning of such systems, viz.:

(1) The siting requirements of the stations are often critical and there may be difficulties in obtaining suitable sites due, for example, to objections from local planning authorities or unwillingness of land owners to sell.

(2) Mains power supplies or access roads may not be available, or available only with difficulty, at some sites.

(3) Adverse propagation conditions may at times cause a deterioration of performance due to fading; while this deterioration can be minimized by suitable equipment design and choice of paths, it cannot be completely eliminated.

The above discussion applies primarily to low-power microwave systems with line-of-sight paths; high power tropospheric-scatter systems are a comparatively recent development and have as yet been used only on a relatively limited scale; these systems are discussed later in the present article (see also Millington and Grisdale page 248 and 275 this issue).

* *Post Office Engineering Department.*

Applications of Microwave Systems

The main fields of application for microwave communication systems are as follows:

(a) "Integrated" fixed systems for multi-channel telephony or television, forming part of national or international networks.

(b) "Non-integrated" fixed systems for multi-channel telephony or television, not normally, or only occasionally, interconnected with the national or international networks.

(c) "Transportable" systems, generally for outside broadcast television purposes, which may be interconnected at times with the national or international networks.

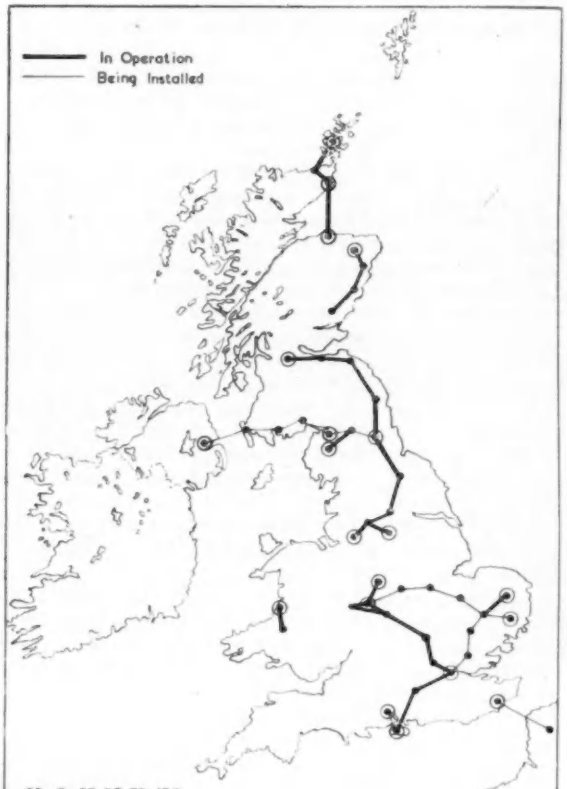

Fig. 1. Post Office microwave links in operation and being installed in the United Kingdom (Feb. 1958)

(a) Integrated Microwave Systems

Typical "integrated" microwave systems in operation or being installed in the United Kingdom are shown in Fig. 1; the buildings and aerials of a typical repeater station are shown on page 226 and the equipment is shown in Fig. 2.

In the United States of America, some three quarters of the total mileage of long-distance television channels and about a quarter of the total trunk telephone circuit-mileage owned and operated by the American Telephone and Telegraph Co. are now provided by microwave systems, and the proportion of trunk telephone circuit mileage provided by microwave is expected to approach a half the total in ten years' time. These systems are mainly of the 'low-power line-of-sight' type, although some tropospheric-scatter systems are beginning to make their appearance.

In addition to the strictly 'microwave' systems using frequencies above about 1 000Mc/s, use is also made in the United Kingdom and elsewhere of systems operating at frequencies around 150 and 450Mc/s for the provision of blocks of up to 24 or 48 telephone channels. The main field of application of the latter systems in the United Kingdom has been for the provision of communications between the mainland and off-shore islands; in overseas countries extensive inland networks have also been set up with this type of system.

(b) Non-integrated Fixed Microwave Systems

Non-integrated microwave systems are used in some countries for such purposes as the communications networks of the fire, police, forestry and highway maintenance services, oil pipe line and electricity power line communications, railway and highway communications and for the broadcast auxiliary services (e.g. studio to transmitter links).

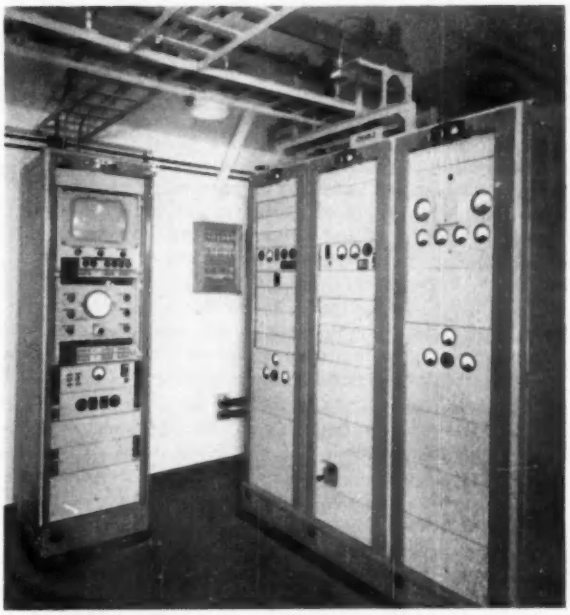

Fig. 2. Typical microwave radio-relay station equipment

(c) Transportable Microwave Systems

The transportable microwave systems referred to here are essentially point-to-point systems set up and operated for a few hours or a few days in one location and then moved to a new location. Typical examples are the microwave equipments used by the British Broadcasting Corporation and the Programme Contractors of the Independent Television Authority in this country for relaying television and in some cases sound signals from the scene of an outside broadcast to a point on the Post Office network for onward transmission to the television control centre of the broadcasting organization[8,9] (see Bridgewater, page 291, this issue).

Choice of Frequency: The Frequency Bands For Microwave Systems

Microwave systems for television or some hundreds of telephony channels occupy several megacycles per second of frequency space for each direction of transmission, and if several broadband channels are to be provided on the same route for both directions of transmission, hundreds of megacycles per second of frequency space are required. It follows that sufficient space can only be found if frequencies above about 1 000Mc/s are used.

Electromagnetic waves with frequencies above about 1 000Mc/s are propagated more or less freely over line-of-sight paths but above about 10 000Mc/s, appreciable absorption is introduced at times by rain, fog and snow; at still higher frequencies, above 20 000Mc/s, absorption by water vapour and oxygen in the atmosphere becomes significant[10].

Low-power microwave systems must use sensibly line-of-sight paths between the transmitting and distant receiving aerials in order to avoid excessive loss of signal strength. Obstructions such as the surface of the earth, buildings, trees etc. should preferably be removed from the direct transmission path by at least 'first Fresnel zone' clearance even under the most unfavourable condition of atmospheric refraction; this implies that the path from one aerial to the other via any obstruction should be at least one half-wavelength longer than that via the direct path. There is an additional requirement that appreciable reflected components should not be received from outside the Fresnel zone since the resulting multi-path transmission may impair transmission quality.

As the frequency is increased both the gain and the directivity of microwave aerials of a given size increase, the beamwidth correspondingly decreases; furthermore, the width of the Fresnel zone also decreases so that the necessary obstacle clearance is more readily obtained at the higher frequencies. These advantages are, however, offset to some extent by the tendency for fading to be greater at the higher frequencies.

Summing up, it may be said that the range from about 1 000 to 10 000Mc/s is particularly suitable for microwave line-of-sight systems, but frequencies up to 15 000Mc/s can be used effectively under suitable conditions.

The frequency bands allocated in the United Kingdom for microwave systems conform with the agreement reached by the member countries of the International Telecommunications Union at Atlantic City in 1947. For example, frequencies around 2 000, 4 000 and 6 500Mc/s are available for integrated systems.

As already mentioned frequencies around 150 and 450Mc/s are also used for the smaller capacity systems, sometimes on a shared basis with mobile services where adequate geographical separation is possible. These lower frequencies have the advantages that longer paths, and some obstruction of the paths, can be tolerated and the equipment is often cheaper.

Although the less favourable propagation characteristics of frequencies above 10 000Mc/s restrict the range to a certain degree, there are compensatory advantages, for example the equipment is more compact and there is at present less demand on the available frequency space.

Transmission Requirements

In general the telephony or television channels provided by integrated microwave systems may, at times, form part of international connexions several thousands of miles long. It follows that the transmission characteristics in respect of noise, gain stability, bandwidth and amplitude linearity, and in the case of television channels, waveform distortion, must be such as to permit satisfactory transmission over these long distances.

Two international bodies, both forming part of the International Telecommunication Union (I.T.U.), are responsible for the preparation of recommendations facilitating the setting up of long international circuits, viz. the International Radio Consultative Committee (C.C.I.R.), and the International Telegraph and Telephone Consultative Committee (C.C.I.T.T.). The C.C.I.R. through its Study Group IX, is responsible for the preparation of recommendations relating to microwave systems[11]; the C.C.I.T.T., through its Study Group III, is concerned with the introduction of such systems into the general line telecommunication network. The C.C.I.R. and the C.C.I.T.T. are thus both concerned in the formulation of the transmission requirements of international microwave systems.

The recommendations of the C.C.I.R. in respect of the transmission requirements of microwave systems are in close conformity with the corresponding recommendations of the C.C.I.T.T. for line systems, but take into account the special characteristics of microwave systems, e.g. the higher noise levels that may occur for a very small percentage of the time due to fading.

NOISE REQUIREMENTS FOR TELEPHONY AND TELEVISION

In a microwave system the noise requirements are of particular interest since these determine the transmitter power, aerial size and other parameters of the system. One important source of noise is that due to valves and mixers in the early stages of receivers and repeaters, since external radio noise is generally negligible; this noise is a maximum when the fading is deepest. In a telephony system additional noise may arise due to intermodulation between the signals in the various telephony channels; this noise is a maximum when most channels are active, i.e. during the busy hours. In general the noise in a microwave system is fairly steady at a low value for most of the time but there are occasional surges of higher level due to fades; by suitable system design and planning these surges can be confined to a negligibly small percentage of the time.

The permissible noise levels are defined internationally in terms of 'hypothetical reference circuits' 2 500km (1 600 miles) long with a specified number of modulation and demodulation processes (Rec. No. 200, 201, 202 and 203 Ref. (11) and Doc. 12, Ref. (12)); if these levels are expressed in terms of a typical microwave system 250km (160 miles) long the resulting signal-to-noise ratios are as follows:

Telephony channel (300c/s to 3·4kc/s); the ratio of the level of a test-tone (1mW) at a point of zero relative level to the mean value of psophometric noise in any hour should exceed 63dB. (The higher levels of noise permissible for very short periods of time have not yet been defined.)

Television channel (450 line system, 50c/s to 3Mc/s or 625 line system, 50c/s to 5Mc/s): the ratio of the peak-to-peak signal to r.m.s. noise should not be less than 40dB for more than 0·1 per cent of the time (linear noise distribution, i.e. rising with frequency by 6dB per octave, in the video band).

The foregoing relates to the transmission requirements in respect of noise that are desirable for integrated microwave systems forming part of long international connexions; in the case of other systems, not integrated with the general network, appreciably higher levels of noise are permissible and still enable satisfactory service to be provided.

WAVEFORM TRANSMISSION REQUIREMENTS FOR TELEVISION

The waveform transmission requirements are of great importance for television signals and it is now customary to specify the requirements in terms of a rating factor K, defining the permissible distortion of a number of test signals including the following:

(1) A pulse of sine-squared envelope and half-amplitude duration 0·17μsec (405 line system) or 0·10μsec (625 line system).

(2) A 40μsec bar test signal.

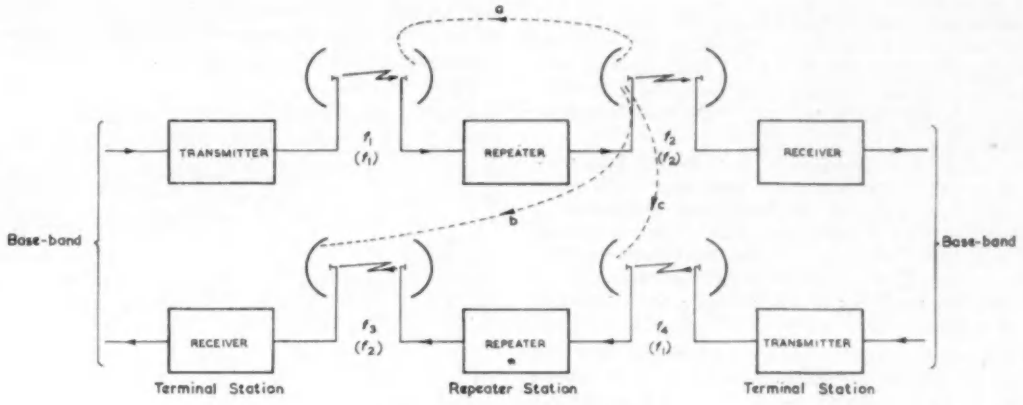

Fig. 3. Principles of radio-relay system

(3) A 50c/s square-wave test signal.

The detailed determination of the *K*-rating from the received signal waveform is described elsewhere[12,13]; as a guide it may be said that a *K*-rating factor of 1 per cent, which is considered permissible for a 250km (160 mile) link, would correspond to a long-delay echo of 1 per cent observed with test signal (1), a tilt of 2 per cent on test signal (2) or a tilt of 4 per cent on test signal (3).

Space does not permit a complete statement of all the transmission requirements for telephony and television; reference should be made elsewhere[11,12] for more detailed information.

Line-of-Sight Microwave Systems

The basic elements of a multi-section radio-relay system using line-of-sight paths are shown in Fig. 3; such a system comprises two terminal stations and a chain of repeater stations spaced at intervals of some 20 to 50 miles. At the terminal stations a microwave carrier is generated, modulated by the multi-channel telephony or television signal to be transmitted, and after amplification to a power of a few watts, is applied to a directional aerial for radiation to the first intermediate or repeater station. At the repeater station the microwave signal is received on a directional aerial, is amplified and shifted in frequency to avoid interference between the incoming and outgoing signals and is then re-radiated to the second repeater station and so on. The microwave signal at the distant terminal station is, after amplification, demodulated and the multi-channel telephony signal recovered.

In the system shown in Fig. 3, four frequencies f_1, f_2, f_3 and f_4 are used to avoid crosstalk over the dotted paths *a*, *b* and *c*. With adequate aerial directivity however it is possible to reduce the number of frequencies required to two, i.e. to f_1 and f_2, as shown in brackets in the Figure.

Multiplexing Techniques for Telephony

With a few exceptions general practice in integrated microwave systems is to use frequency-division multiplexing (f.d.m.) when a number of telephony channels are to be transmitted on the same carrier. The f.d.m. signal comprises a number of telephony channels arranged side-by-side in the base-band* as shown in Fig. 4; each telephony channel transmits audio frequencies from 300c/s to 3·4kc/s, the base-band signals being in the form of single-sideband signals with suppressed carriers at intervals of 4kc/s. The

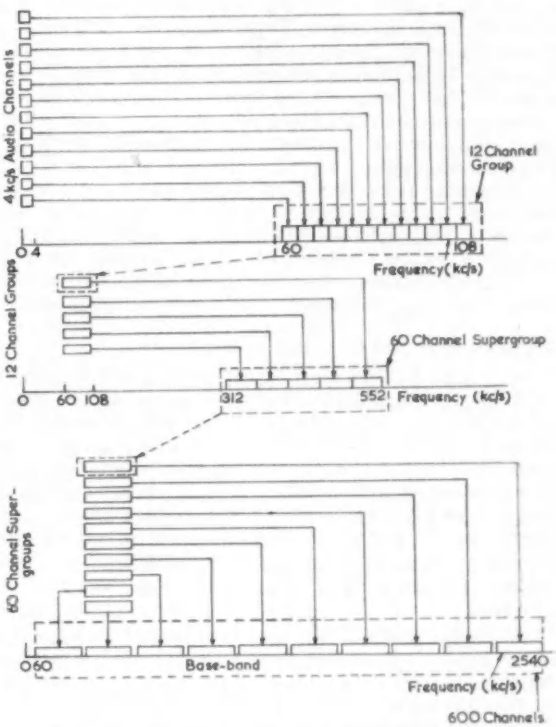

Fig. 4. Frequency-division multiplex multi-channel telephony signals.

lower and upper frequency limits required for typical systems with various numbers of telephony channels are shown in Table 1. The frequencies given are those recommended by the C.C.I.R. for radio systems (Rec. No. 191, Ref. (11)), and are compatible with those recommended by the C.C.I.T.T. for line systems.

TABLE 1.

Base-band Frequency Limits for Various Numbers of Telephony Channels.

NUMBER OF CHANNELS	BASE-BAND FREQUENCY LIMITS (KC/S)
12 (1 group)	12-60 or 60-108
24 (2 groups)	12-108
60 (1 supergroup)	12-252 or 60-300
120 (2 supergroups)	12-552 or 60-552
240 (4 supergroups)	60-1052
600 (10 supergroups)	60-2540

* *The term 'base-band' designates the band of frequencies transmitted by the microwave system between its input and output terminals.*

Consideration is now being given to microwave systems with even larger capacity, e.g. 1 800 or more telephony channels, in which case the base-band might extend from 60 to 8 500kc/s; a microwave system for up to 2 220 telephone channels has been developed by the Bell Telephone Laboratories[4].

The use of f.d.m. techniques is of course an important advantage when line and microwave systems are to be interconnected, since little or no additional equipment is required at the point of interconnexion; it also permits the use of standardized multiplex terminal equipment throughout a mixed line and microwave radio network; and the use of common techniques for dropping and inserting blocks of channels.

Time-division multiplex (t.d.m.) techniques have also been used in systems providing up to 24 or 48 telephone channels[14]. In t.d.m. systems pulses with a half-amplitude duration of a few microseconds are modulated in amplitude, width or position by the audio signals to be transmitted; each pulse in a train of pulses corresponds to a different telephony channel and the train of pulses is repeated at a frequency at least twice the highest audio frequency to be transmitted, e.g. 8kc/s. The main advantages of t.d.m. techniques are that the terminal equipment is cheap and compact, amplitude linearity of the microwave links is unimportant, and individual telephony channels can readily be dropped and inserted; however, t.d.m. systems cannot be interconnected with f.d.m. systems except on an audio-to-audio basis. T.D.M. systems also require considerably greater frequency space than f.d.m. systems of similar capacity and are not suitable for large numbers of telephone channels because of the very narrow pulses and large bandwidths that would be required.

Transmission of Television Signals

Microwave systems are well adapted to the transmission of television signals since the video signal may be transmitted directly in the base-band, i.e. without modulation on to a sub-carrier as is necessary in a long coaxial-cable system in order to avoid low-frequency interference and delay distortion. Furthermore, little or no equalization is required in a microwave system whereas in a long coaxial-cable system the equalization required to correct the variation of the cable attenuation over the frequency band of the television signal may amount to hundreds of decibels.

In current practice, and for monochrome television, the video signal is transmitted over radio-relay systems without modification; however, it would appear that there are significant advantages to be obtained by the use of pre-emphasis, i.e. the attenuation of the lower video components by some 15dB relative to the high frequency components before transmission, the appropriate de-emphasis correction being applied at the output of the terminal receiver. Pre-emphasis enables the same modulators and demodulators to be used either for television or for multi-channel telephony, thus facilitating the interchangeability of broad-band channels and the use of a common standby channel in a multi-r.f. channel system transmitting both television and multi-channel telephony. It would also appear, from experience in the U.S.A., that pre-emphasis facilitates the transmission of colour television signals over microwave links by minimizing the differential delay and amplitude distortion of the chrominance sub-carrier signal.

Microwave systems of very large capacity, e.g. 1 800 or more telephone channels, may be used alternatively to provide a television channel together with some 600 or 900 telephone channels on a single microwave carrier; such systems would offer marked economic advantages on routes where traffic requirements are heavy compared with systems using a number of carriers to provide the same capacity.

Modulation Methods

Frequency modulation is in general use for f.d.m. multi-channel telephony with 12 to 600 or more channels and for television transmission over microwave systems; both frequency modulation and amplitude (pulse) modulation are used for t.d.m. multi-channel telephony with up to 48 channels.

The reasons for this general preference for frequency modulation as compared with amplitude modulation are as follows:

(1) The transmission of f.d.m. multi-channel telephony signals requires a highly linear relation between the input and output amplitudes of the base-band signal if crosstalk between the telephony channels is to be avoided; at the present state of the art this is more readily achieved with f.m. than with a.m.

(2) By using f.m. with deviation ratios greater than unity a substantial improvement in signal-to-noise ratio can be obtained in both multi-channel telephony and television systems. To obtain an equal improvement in an a.m. system would require appreciably larger aerials or increased transmitter power.

(3) The use of f.m. for television results in a distribution of noise in which most of the noise is concentrated at the higher video frequencies, where it is less visible than at low video frequencies; furthermore and for a similar reason, echo signals are less visible with f.m. than with a.m.

However, the use of f.m. for the transmission of f.d.m. multi-channel telephony places stringent requirements on the uniformity of the group-delay/frequency characteristics of the intermediate frequency and microwave components of the system if crosstalk between telephony channels is to be avoided. For the same reason the levels of echo signals, e.g. arising from impedance mismatch in feeders or in the radio path, must not be excessive[15].

Aerials, Feeders, Branching Filters and Isolators

The chief requirements of the aerials for a microwave system are: high gain to reduce the transmitter power required for a given signal-to-noise ratio, good directivity to minimize interference to and from other systems and to reject echoes due to reflections from buildings, hillsides etc., in the radio path, good impedance matching between the aerial and its feeder to minimize reflections which would otherwise cause echoes in television systems or crosstalk in multi-channel telephony systems.

Perhaps the most commonly used aerials in microwave systems are those employing parabolic reflectors or mirrors with a waveguide feed or feed horn at the focus, Fig. 5(a). The sizes of parabolic reflectors used range from about 3 to 6ft diameter for mobile equipment, to 12 or 15ft in diameter for fixed systems; the power gain is proportional to the area of the aperture and is some 40dB relative to a non-directional or isotropic aerial in the case of a 4 000Mc/s aerial with a diameter of 12ft, the corresponding beam-width at half power being about 3°. In some cases arrangements are made for the aerial to be energized with two planes of polarization simultaneously, e.g. to enable a single aerial to be used simultaneously for transmission and reception on nearby frequencies. The maximum bandwidth available on parabolic reflector aerials is usually of the order of 10 to 20 per cent of the mid-band

frequency, this being adequate for systems with several radio frequency channels on the same aerial.

In the case of heavily loaded main-route microwave systems it may be advantageous to accommodate three frequency bands centred on say 2 000, 4 000 and 6 500Mc/s on the same aerial; in such cases the horn-reflector aerial shown in Fig. 5(b) can be used. This type of aerial has excellent impedance matching properties over a frequency range of four to one or more, together with very low levels of radiation in unwanted directions.

Although air-spaced coaxial feeders are used up to about 2 000Mc/s, the losses and impedance irregularities of such feeders tend to be prohibitive at higher frequencies and rectangular waveguides are generally used at 4 000Mc/s upwards; the loss of a typical 2·4in by 1·1in copper waveguide at 4 000Mc/s is about 1dB/100ft.

Plane reflectors are sometimes used, as shown in Fig. 5(c); such reflectors enable the aerials to be kept near ground level, thus facilitating maintenance and avoiding the need for, and cost of, long feeders.

Where transmit and receive radio-frequency channels are to be combined for application to a common aerial, or when several transit (or receive) channels are to be combined for this purpose, branching filters using coaxial-line techniques up to 2 000Mc/s or waveguides techniques at 4 000Mc/s upwards are available.

The non-reciprocal properties of ferrite-loaded coaxial or waveguide components can be used to minimize the effects of impedance mismatch in long feeders; these 'isolators' are particularly useful when transmitters with frequency-modulated oscillators are to be operated directly into long feeders without a buffer amplifier[16].

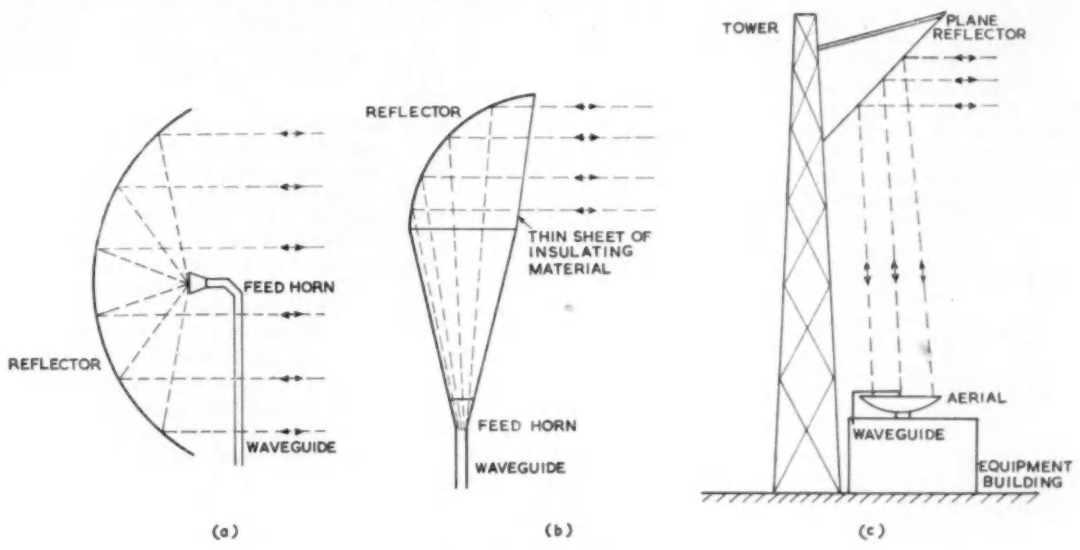

Fig. 5. Microwave aerial systems
(a) Parabolic reflector
(b) Horn reflector
(c) Plane-reflector

Terminal Transmitters and Receivers

The basic arrangements of typical frequency-modulation terminal transmitters are shown in Figs. 6(a) and 6(b); they are of two main types:

(1) In which a radio-frequency oscillator is frequency-modulated, e.g. by means of a reactor valve in u.h.f. systems, or directly using a klystron oscillator in s.h.f. systems, Fig. 6(a).

(2) In which an intermediate-frequency carrier is frequency modulated and this i.f. carrier is combined with a radio-frequency carrier in a frequency-changer, thus producing the required output frequency, Fig. 6(b).

Arrangement (2) is more complex but has certain advantages, e.g. the frequency modulator is a standard unit working on the same frequency irrespective of the radio frequency used. Furthermore the functions of frequency stabilization and modulation of the carrier are carried out separately and generally more effectively.

In the case of multi-channel telephony microwave systems the mean frequency of the carrier is stabilized; in most of the television microwave systems in current use the carrier frequency corresponding to the tips of the synchronizing pulses is stabilized. However, as noted earlier, there is now a tendency in television microwave systems to use 'pre-emphasis'; this removes most of the asymmetry of the video waveform and enables mean-frequency stabilization of the carrier to be employed, it also enables the same modulators and demodulators to be used for television and multi-channel telephony.

In the case of microwave equipment for fixed links providing large numbers of telephone channels or a television channel with the high standards of performance necessary for long national or international connexions it is usual to interpose an amplifier, e.g. a travelling-wave tube, between the frequency-modulated oscillator and the aerial in order not only to provide a higher power output but also to isolate the oscillator from feeder reflections. This avoids the non-linearity due to frequency-pulling that would otherwise occur; in the case of mobile television link equipment, or multi-channel telephony equipment providing a relatively small number of telephone channels, the frequency-modulated oscillator feeds the transmitting aerial directly, or if a long-feeder is used, via a ferrite isolator[16].

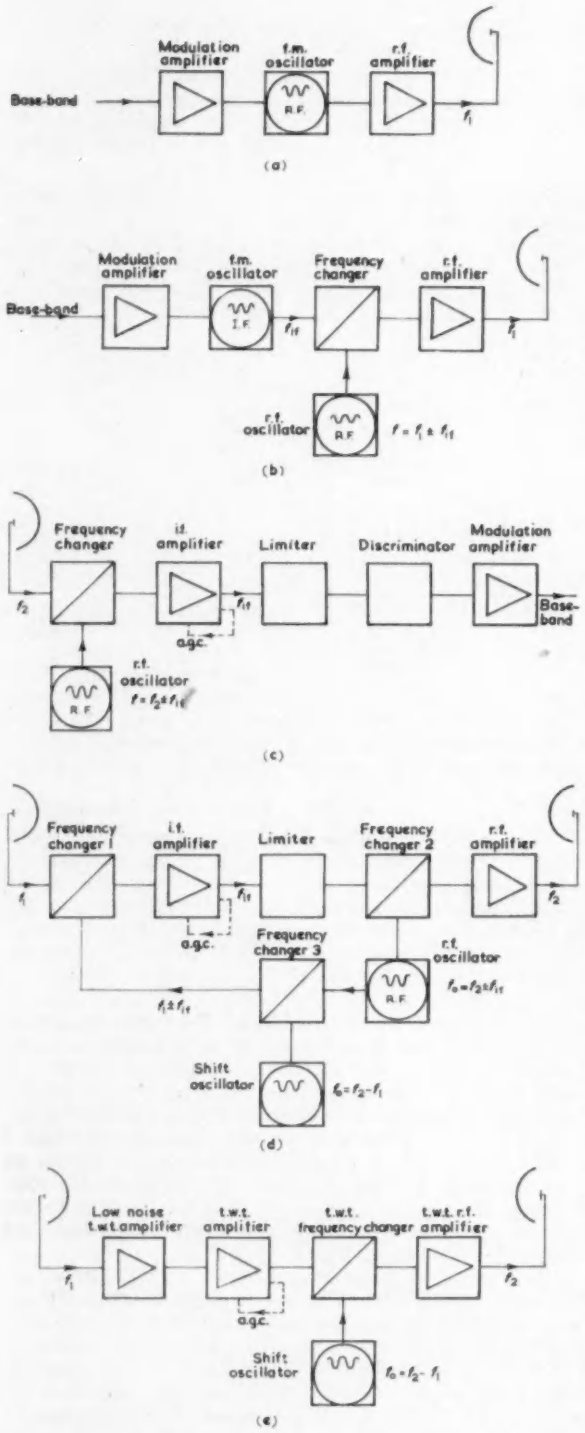

Fig. 6. Basic arrangements of terminal transmitters, terminal receivers and repeaters

(a) Terminal transmitter with frequency-modulated r.f. oscillator
(b) Terminal transmitter with frequency-modulated i.f. oscillator
(c) Terminal receiver
(d) Repeater with i.f. amplification
(e) Repeater with all r.f. amplification

Terminal receivers are almost invariably of the superheterodyne type with a frequency-stabilized local oscillator, as in Fig. 6(c); the superheterodyne principle is used because it enables the desired gain to be readily achieved and facilitates automatic gain control, limiting and demodulation, which are at present difficult to achieve at radio-frequency.

The C.C.I.R. has indicated preferred values for the base-band signal levels and impedances, and for the modulation, intermediate-frequency and radio-frequency characteristics of microwave radio-relay systems used for international connexions (Rec. Nos. 184 to 195, Ref. (11)).

Repeaters

The repeaters generally employed are of the non-demodulating type to avoid an increase in distortion and noise, and the greater level instability that would be entailed by the use of repeaters in which the signal appears at the base-band and is then modulated on to a carrier for onward transmission.

A typical non-demodulating repeater is shown in Fig. 6(d); such a repeater incorporates two frequency changes in the main signal path, the first change is from the incoming radio frequency f_1 to an intermediate frequency f_{if} at which most of the required gain is achieved, the second frequency change is from the intermediate frequency to the outgoing frequency f_2. Automatic gain control and some limiting are provided at intermediate frequency in order to stabilize the output level. The output from the second frequency changer is amplified to a power level suitable for radiation to the next repeater station.

To avoid cumulative frequency errors provision is made for deriving the local oscillator feeds for the first and second frequency changers from a common radio-frequency source; in the example shown in Fig. 6(d) the radio-frequency oscillator feeds the second frequency-changer at a frequency $f = f_2 \pm f_{if}$ and the feed for the first frequency-changer is obtained from it by modulating a portion of the radio-frequency oscillator output by the shift frequency $f_o = f_2 - f_1$ in a third frequency-changer, the sideband frequency $f_1 \pm f_{if}$ being selected and used.

It is not essential to translate the incoming signal to an intermediate frequency in a non-demodulating repeater, all the necessary amplification can be achieved at radio frequency. For example, a repeater may consist of a two-stage low-noise travelling-wave tube amplifier with fast-operating automatic gain control, followed by a travelling-wave tube used as a frequency-changer[17] and finally a travelling-wave tube power amplifier, Fig. 6(c). In such a repeater the shift-frequency oscillator f_o is applied to the travelling-wave tube frequency changer and generates sidebands $f_1 \pm f_o$, one of which is selected and amplified.

Multi-R.F. Channel Systems

In the case of heavily loaded routes it may be necessary to provide several independent broad-band channels over the same route. The wide bandwidths that can be accommodated on microwave aerials makes it possible to use the same aerial for a number of r.f. channels, simultaneously for transmission and reception if required. Such an arrangement reduces the cost of a link, not only by reducing the number of aerials and feeders but also by enabling lighter and the therefore cheaper towers or masts to be used to support the aerials.

A repeater for three r.f. channels is shown schematically in Fig. 7; in this case each aerial transmits and receives three r.f. channels simultaneously. A bi-polar feed can be used to provide some discrimination between transmitted

and received signals on the same aerial. Additional discrimination is provided by the selectivity of the repeaters and the associated band-pass filters (the latter are not shown in Fig. 7). Branching filters are used to separate the individual r.f. channels without significant loss.

The frequency plan for multi-r.f. channel systems must be chosen with great care in order to minimize the risk of interference from (a) the various oscillators in the system, (b) the high-level transmitted signals and (c) from any intermodulation products of the latter. Account must also be taken of the 'image' channels of the transmitter and receiver, i.e. channels spaced from the wanted channel by twice the intermediate frequency.

The frequency plan recommended by the C.C.I.R. (Rec. No. 194, Ref. (11)) for 600-channel telephony or television systems is shown in Fig. 8. The plan provides for up to six r.f. channels in each direction and is intended for use with an intermediate frequency of 70Mc/s; the spacing between the centres of adjacent channels is 29Mc/s and

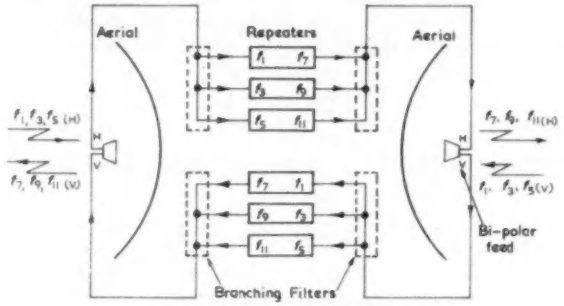

Fig. 7. Three r.f. channel repeater

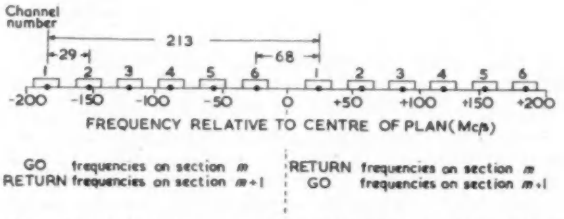

Fig. 8. Frequency plan recommended by the C.C.I.R. for six r.f. channel systems for multi-channel telephony (600-channels) or television

the 'shift frequency', i.e. the frequency interval between corresponding go and return channels, is 213Mc/s. Adjacent r.f. channels operate with different polarization in order to facilitate the separation of channels. Channels on frequencies interleaved with those on the main plan can also be used if desired, e.g. for spur or crossing routes.

If six r.f. channels are required on one route, two 3-r.f channel systems such as that shown in Fig. 7, can be provided; in such a case one system would use the odd number channels of the frequency plan, and the other the even channels.

Protection or Stand-by Channels; Stand-by Power Supplies; Supervisory and Control Systems

A microwave system may be required to achieve a reliability of 99·9 per cent or more; in order to achieve a reliability of this order it is necessary to provide a 'protection' or stand-by channel which can be switched into use manually or automatically when a working channel fails. In systems with up to five working channels on the same route only one protection channel may be needed since the latter is required for a very small percentage of the time and simultaneous faults on two or more working channels are extremely unlikely. The use of a stand-by channel on a separate radio frequency is generally preferred to the use of stand-by equipment operating on the same frequency as the working equipment and switched at individual stations, since the former arrangement enables the stand-by channel to be monitored continuously or used as a temporary additional working channel when required, e.g. for television outside broadcasts.

A pilot tone is sometimes transmitted in the base-band of both working and stand-by channels, above the range of frequencies occupied by the multi-channel telephony or television signal; the pilot tone enables the continuity of each channel to be established, and by measuring the noise level in a narrow band adjacent to the pilot, provides a basis for switching automatically from a working to a stand-by channel should the signal-to-noise ratio in the working channel become inferior to that in the stand-by channel. The C.C.I.R. has recommended preferred values of the pilot frequencies, i.e. 3·2Mc/s for 600-channel systems and 7 or 8·5Mc/s for television systems (Rec. No. 198 and 199, Ref. (11)). In some systems the stand-by channel is also used to provide frequency-diversity operation in order to minimize the effects of fading[18].

Since the normal mains supply cannot always be relied on to the degree of reliability required, it is usual to provide a stand-by generator driven by a petrol or oil engine. In some systems, e.g. those transmitting multi-channel telegraphy, it may be essential to avoid interruptions and in such cases a 'continuity set' is employed. These sets comprise a motor driven from the mains, a generator and a heavy flywheel on the same shaft, and an engine. In the event of a mains failure the engine is started up automatically and is coupled to the motor-generator via a magnetic clutch, the flywheel providing energy to maintain the electrical power output until the engine comes into operation.

Since the repeater stations are normally unattended it is necessary to provide a supervisory and control system for identifying at staffed control stations associated with terminal stations, the repeater station at which a fault has occurred, in order that a maintenance man may visit the station and correct the fault. It is also desirable to indicate broadly the nature of the fault, e.g. urgent or non-urgent, and to indicate to the control station when a mains failure has occurred, so that steps may be taken to replenish the fuel supply of the stand-by generator set. This information is usually transmitted by keyed audio-frequency tones, similar to voice-frequency telegraph signals, sent either over a line circuit, or in an additional 3kc/s wide channel or channels in the base-band of the radio-relay system, or in channels provided by an auxiliary low-power radio-relay system. A service channel for speech transmission is also provided between all the repeater stations and the staffed control stations to facilitate maintenance operations and control of the system.

Tropospheric Forward-Scatter Systems

The fact that radio waves in the frequency range from about 100 to 10 000Mc/s are consistently propagated well beyond the visible horizon to distances of up to a few hundred miles has now been firmly established, mainly as a result of experiments carried out since 1950. However, it should be noted that Marconi, as far back as 1932, demonstrated that signals on about 500Mc/s could be received at a distance of 168 miles, but because of the low power used in his experiments the signals were not reliable.

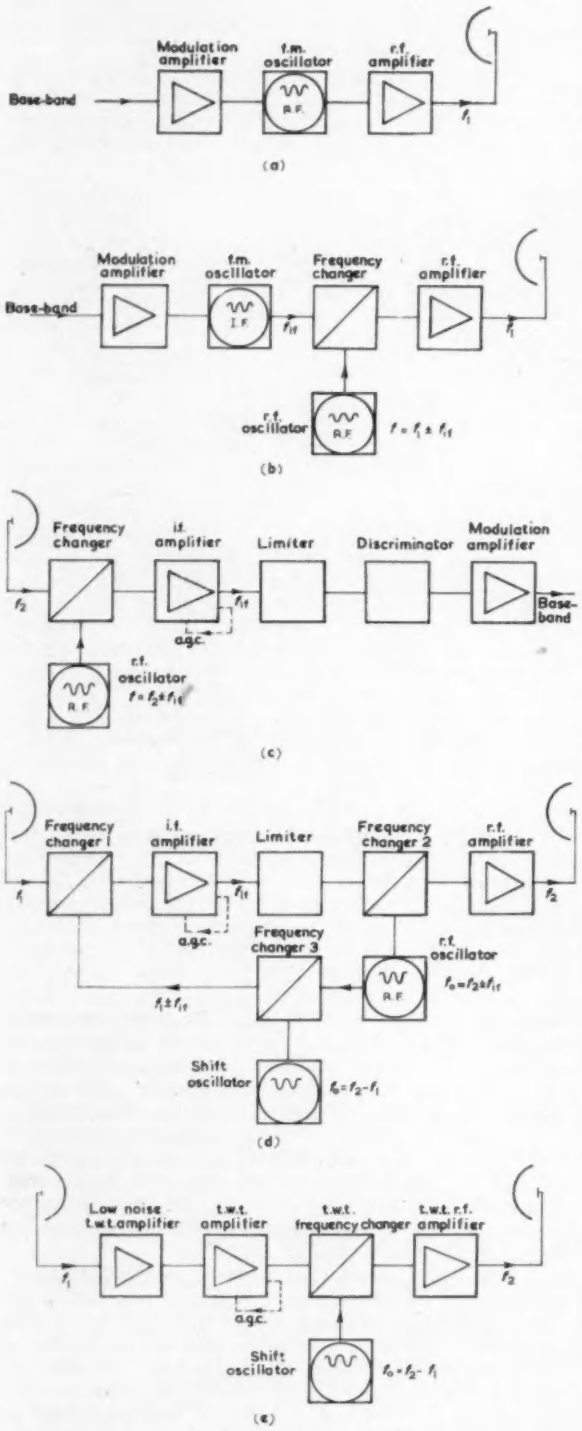

Fig. 6. Basic arrangements of terminal transmitters, terminal receivers and repeaters

(a) Terminal transmitter with frequency-modulated r.f. oscillator
(b) Terminal transmitter with frequency-modulated i.f. oscillator
(c) Terminal receiver
(d) Repeater with i.f. amplification
(e) Repeater with all r.f. amplification

Terminal receivers are almost invariably of the superheterodyne type with a frequency-stabilized local oscillator, as in Fig. 6(c); the superheterodyne principle is used because it enables the desired gain to be readily achieved and facilitates automatic gain control, limiting and demodulation, which are at present difficult to achieve at radio-frequency.

The C.C.I.R. has indicated preferred values for the base-band signal levels and impedances, and for the modulation, intermediate-frequency and radio-frequency characteristics of microwave radio-relay systems used for international connexions (Rec. Nos. 184 to 195, Ref. (11)).

Repeaters

The repeaters generally employed are of the non-demodulating type to avoid an increase in distortion and noise, and the greater level instability that would be entailed by the use of repeaters in which the signal appears at the base-band and is then modulated on to a carrier for onward transmission.

A typical non-demodulating repeater is shown in Fig. 6(d); such a repeater incorporates two frequency changes in the main signal path, the first change is from the incoming radio frequency f_1 to an intermediate frequency f_{if} at which most of the required gain is achieved, the second frequency change is from the intermediate frequency to the outgoing frequency f_2. Automatic gain control and some limiting are provided at intermediate frequency in order to stabilize the output level. The output from the second frequency changer is amplified to a power level suitable for radiation to the next repeater station.

To avoid cumulative frequency errors provision is made for deriving the local oscillator feeds for the first and second frequency changers from a common radio-frequency source; in the example shown in Fig. 6(d) the radio-frequency oscillator feeds the second frequency-changer at a frequency $f = f_2 \pm f_{if}$ and the feed for the first frequency-changer is obtained from it by modulating a portion of the radio-frequency oscillator output by the shift frequency $f_o = f_2 - f_1$ in a third frequency-changer, the sideband frequency $f_1 \pm f_{if}$ being selected and used.

It is not essential to translate the incoming signal to an intermediate frequency in a non-demodulating repeater, all the necessary amplification can be achieved at radio frequency. For example, a repeater may consist of a two-stage low-noise travelling-wave tube amplifier with fast-operating automatic gain control, followed by a travelling-wave tube used as a frequency-changer[17] and finally a travelling-wave tube power amplifier, Fig. 6(c). In such a repeater the shift-frequency oscillator f_o is applied to the travelling-wave tube frequency changer and generates sidebands $f_1 \pm f_o$, one of which is selected and amplified.

Multi-R.F. Channel Systems

In the case of heavily loaded routes it may be necessary to provide several independent broad-band channels over the same route. The wide bandwidths that can be accommodated on microwave aerials makes it possible to use the same aerial for a number of r.f. channels, simultaneously for transmission and reception if required. Such an arrangement reduces the cost of a link, not only by reducing the number of aerials and feeders but also by enabling lighter and the therefore cheaper towers or masts to be used to support the aerials.

A repeater for three r.f. channels is shown schematically in Fig. 7; in this case each aerial transmits and receives three r.f. channels simultaneously. A bi-polar feed can be used to provide some discrimination between transmitted

and received signals on the same aerial. Additional discrimination is provided by the selectivity of the repeaters and the associated band-pass filters (the latter are not shown in Fig. 7). Branching filters are used to separate the individual r.f. channels without significant loss.

The frequency plan for multi-r.f. channel systems must be chosen with great care in order to minimize the risk of interference from (a) the various oscillators in the system, (b) the high-level transmitted signals and (c) from any intermodulation products of the latter. Account must also be taken of the 'image' channels of the transmitter and receiver, i.e. channels spaced from the wanted channel by twice the intermediate frequency.

The frequency plan recommended by the C.C.I.R. (Rec. No. 194, Ref. (11)) for 600-channel telephony or television systems is shown in Fig. 8. The plan provides for up to six r.f. channels in each direction and is intended for use with an intermediate frequency of 70Mc/s; the spacing between the centres of adjacent channels is 29Mc/s and

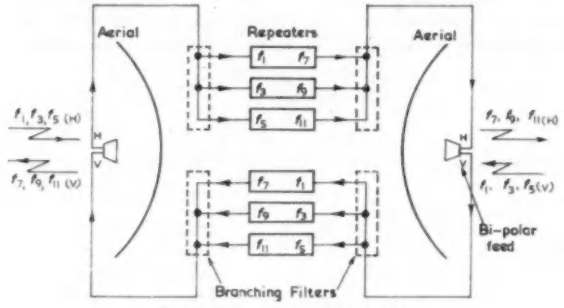

Fig. 7. Three r.f. channel repeater

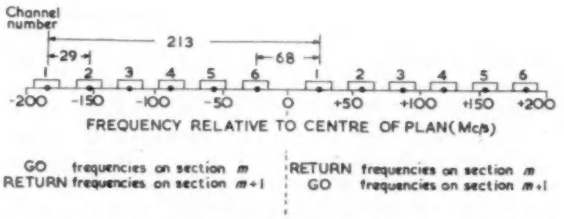

Fig. 8. Frequency plan recommended by the C.C.I.R. for six r.f. channel systems for multi-channel telephony (600-channels) or television

the 'shift frequency', i.e. the frequency interval between corresponding go and return channels, is 213Mc/s. Adjacent r.f. channels operate with different polarization in order to facilitate the separation of channels. Channels on frequencies interleaved with those on the main plan can also be used if desired, e.g. for spur or crossing routes.

If six r.f. channels are required on one route, two 3-r.f channel systems such as that shown in Fig. 7, can be provided; in such a case one system would use the odd number channels of the frequency plan, and the other the even channels.

Protection or Stand-by Channels; Stand-by Power Supplies; Supervisory and Control Systems

A microwave system may be required to achieve a reliability of 99·9 per cent or more; in order to achieve a reliability of this order it is necessary to provide a 'protection' or stand-by channel which can be switched into use manually or automatically when a working channel fails. In systems with up to five working channels on the same route only one protection channel may be needed since the latter is required for a very small percentage of the time and simultaneous faults on two or more working channels are extremely unlikely. The use of a stand-by channel on a separate radio frequency is generally preferred to the use of stand-by equipment operating on the same frequency as the working equipment and switched at individual stations, since the former arrangement enables the stand-by channel to be monitored continuously or used as a temporary additional working channel when required, e.g. for television outside broadcasts.

A pilot tone is sometimes transmitted in the base-band of both working and stand-by channels, above the range of frequencies occupied by the multi-channel telephony or television signal; the pilot tone enables the continuity of each channel to be established, and by measuring the noise level in a narrow band adjacent to the pilot, provides a basis for switching automatically from a working to a stand-by channel should the signal-to-noise ratio in the working channel become inferior to that in the stand-by channel. The C.C.I.R. has recommended preferred values of the pilot frequencies, i.e. 3·2Mc/s for 600-channel systems and 7 or 8·5Mc/s for television systems (Rec. No. 198 and 199, Ref. (11)). In some systems the stand-by channel is also used to provide frequency-diversity operation in order to minimize the effects of fading[18].

Since the normal mains supply cannot always be relied on to the degree of reliability required, it is usual to provide a stand-by generator driven by a petrol or oil engine. In some systems, e.g. those transmitting multi-channel telegraphy, it may be essential to avoid interruptions and in such cases a 'continuity set' is employed. These sets comprise a motor driven from the mains, a generator and a heavy flywheel on the same shaft, and an engine. In the event of a mains failure the engine is started up automatically and is coupled to the motor-generator via a magnetic clutch, the flywheel providing energy to maintain the electrical power output until the engine comes into operation.

Since the repeater stations are normally unattended it is necessary to provide a supervisory and control system for identifying at staffed control stations associated with terminal stations, the repeater station at which a fault has occurred, in order that a maintenance man may visit the station and correct the fault. It is also desirable to indicate broadly the nature of the fault, e.g. urgent or non-urgent, and to indicate to the control station when a mains failure has occurred, so that steps may be taken to replenish the fuel supply of the stand-by generator set. This information is usually transmitted by keyed audio-frequency tones, similar to voice-frequency telegraph signals, sent either over a line circuit, or in an additional 3kc/s wide channel or channels in the base-band of the radio-relay system, or in channels provided by an auxiliary low-power radio-relay system. A service channel for speech transmission is also provided between all the repeater stations and the staffed control stations to facilitate maintenance operations and control of the system.

Tropospheric Forward-Scatter Systems

The fact that radio waves in the frequency range from about 100 to 10 000Mc/s are consistently propagated well beyond the visible horizon to distances of up to a few hundred miles has now been firmly established, mainly as a result of experiments carried out since 1950. However, it should be noted that Marconi, as far back as 1932, demonstrated that signals on about 500Mc/s could be received at a distance of 168 miles, but because of the low power used in his experiments the signals were not reliable.

In the United Kingdom, the pioneering work of the late Dr. E. C. S. Megaw of the Admiralty Signal and Radar Establishment demonstrated, in 1950, that signals on about 3 000Mc/s could be consistently received on an oversea path well beyond the visible horizon. It was shown that these signals could not be accounted for by ray bending due to refraction in the normal undisturbed atmosphere, nor could they be accounted for by propagation in ducts over the sea surface; the signals were in fact attributed to radio-wave scattering caused by atmospheric turbulence.

Since 1950, a great deal of experimental and theoretical work on tropospheric forward-scatter propagation has been carried out[5,6,7,19]; there is now available a considerable volume of data on which to base the design of systems.

Tropospheric forward-scatter radio systems have now emerged from the experimental and development stage and a number of such systems are in operation; for example, extensive tropospheric forward-scatter radio links have been installed in Canada and Alaska to provide communication facilities between radar stations, and for civil communications; these links provide 18, 36 or in some cases up to 132 telephone circuits over distances of 1 000 miles or more in hops of 100 to 200 miles. A tropospheric forward-scatter link is now in operation on a 184-mile oversea path between Florida and Cuba, providing up to 240 telephone circuits (up to 120 circuits on each of two carriers) or a television channel. In Europe a tropospheric forward-scatter link is in operation between Sardinia and Minorca, a distance of 240 miles, and other systems are planned. However, extensive applications of tropospheric forward-scatter systems for civil communications in countries such as the United Kingdom with extensive line, cable and line-of-sight microwave systems seem unlikely.

The prime advantage of tropospheric forward-scatter systems, compared with line-of-sight microwave systems or coaxial-cable systems, is that they provide reliable communication over distances of up to 200 miles or more without repeater stations or interconnecting cables. This feature is of considerable value when the intervening terrain is difficult of access or when sea crossings are involved.

On the other hand the larger range tropospheric forward-scatter systems require very large aerials and very high-power transmitters which not only involve heavy capital expenditure but also, in the case of the transmitters, considerable annual charges.

It is by no means obvious that a tropospheric forward-scatter system is cheaper, either in capital costs or in annual charges, than a line-of-sight microwave system or a cable system; each must be considered on its merits in relation to the job to be done. Furthermore, line-of-sight microwave and cable systems can readily provide for inserting or dropping blocks of channels at intermediate points; this is of considerable value and is often required in a complex inland network. By its nature, such a facility is not available in a tropospheric forward-scatter system.

Tropospheric forward-scatter systems are subject to certain technical limitations. For example, it would appear that the frequencies used cannot readily be shared in the same geographical area with conventional low-power line-of-sight microwave systems since the high powers used by the scatter systems, and the ease with which scatter signals are propagated over hundreds of miles, introduces a considerable risk of interference.

At their present stage of development tropospheric forward-scatter systems require much more frequency space than line-of-sight systems of comparable capacity, a limitation which arises from the large distances over which scatter signals are propagated and the need to use different frequencies for the various sections of a multi-section route in order to avoid mutual interference.

Finally, it is not practicable at the present time to engineer the longer tropospheric forward-scatter links fully to meet the high standards recommended by the C.C.I.T.T. and C.C.I.R. for international connexions. For a small fraction of the time the noise level on a long tropospheric forward-scatter link may be higher than is allowable on international circuits; nevertheless the performance may be acceptable for many purposes.

Characteristics of Tropospheric Forward-scatter Propagation

Propagation by forward-scattering is essentially one involving a large transmission loss, thus it is necessary to use high-gain and therefore narrow beam aerials both for transmitting and receiving if the loss is not to be excessive. In practice the aerial beams are arranged as shown in Fig. 9 to intersect in a 'common volume' in which scattering occurs.

The scattering angle θ between the transmitting and receiving beams is of great importance and for effective transmission must be kept as small as possible. This implies

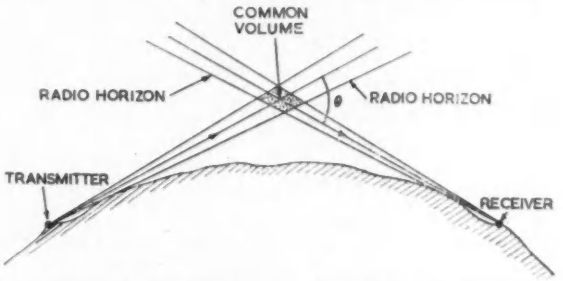

Fig. 9. Geometry of tropospheric forward-scatter radio link

that the transmitting and receiving sites must be chosen so that they have an unobstructed view to the natural horizon.

The maximum range of signals scattered from the troposphere is determined by the greatest height at which scattering can occur in that region; the troposphere extends up to about six miles and the corresponding maximum range is about 400 miles. However, recent investigations[19] suggest that signals scattered from the stratosphere, i.e. the region between the troposphere and the ionosphere, may extend the maximum range to some 700 miles.

The more important characteristics of tropospheric forward-scatter propagation are as follows:

(1) The instantaneous received signal strength fluctuates continuously since the signal itself is the resultant of a large number of components of random and varying phases.

(2) The mean signal level varies from hour-to-hour, day-to-day and month-to-month by some 10 to 20dB or more.

(3) The received signal levels are relatively weak, being from 50 to 100dB or more below the free-space level.

(4) Usable signals can be received consistently even up to some 400 miles or more provided that very large aerials, very high-power transmitters and sensitive receivers are employed.

(5) Frequencies from 100 to 10 000Mc/s can be used; however, frequencies below about 1 000Mc/s are generally more effective for the longer paths.

(6) Bandwidths of three or four megacycles per second, i.e. sufficient for a television channel or some hundreds of telephone channels, may be transmitted over distances up to about 200 miles provided very large, narrow-beam aerials and high transmitter powers are employed; however, the useful bandwidth decreases rapidly as the distance is increased. There is as yet insufficient experimental data on which to assess the quality of transmission from the aspect

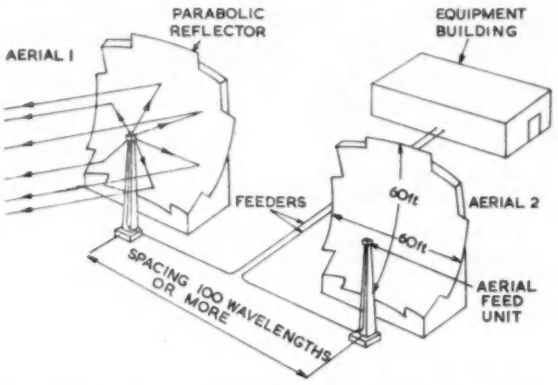

Fig. 10. Arrangement of aerials: tropospheric forward-scatter radio link

of television signals and more data of this type is needed.

Techniques Employed in Tropospheric Forward-scatter Systems

Tropospheric forward-scatter systems are characterized by large aerials and high-power transmitters; the transmitter powers currently employed range from 1 to 20kW and the aerial sizes from 12 to 60ft diameter respectively for systems providing from 12 to 120 telephone circuits over paths from 100 to 250 miles long. Still larger aerials, up to 120ft diameter, and powers up to 50kW are planned for systems providing 100 telephone circuits over paths up to 400 miles long[20].

The aerials used are generally of the parabolic reflector type (Fig. 10), mounted some twenty wavelengths above the local ground; elevated sites are advantageous since they enable the scattering angle θ, and thus the scatter transmission loss, to be reduced.

Aerials with gains of 30dB or more may not realize the nominal plane-wave gain due to lack of coherence of the wave-front, thus an aerial with a nominal plane-wave gain of 50dB may yield under 40dB for 10 per cent of the time. Nevertheless high-gain, narrow-beam, aerials may be necessary in order to achieve the desired bandwidth by reducing the time-delay differences between the components of the scatter signal.

It is usual because of the large size and high cost of the aerials to employ the same aerials for transmission and reception, diplexers being used to combine the transmitter output and the receiver input, Fig. 11. R.F. filters are provided at the transmitter output to minimize noise in the received frequency band, and at the receiver input to reject the high-level signal at the transmitted frequency.

Klystron amplifiers are usually employed in the high-power output stages of transmitters because of the large power gains and high efficiency obtainable; gains of 50dB and output powers up to 10kW at 2 500Mc/s, 2kW at 6 000Mc/s are available[21,22].

In most systems the high-power transmitter amplifier is driven by a low-power frequency-modulation exciter, with frequency-division multiplexing of the telephony channels. Most of the advantages of frequency-modulation already noted in connexion with line-of-sight microwave systems also apply to tropospheric forward-scatter systems; however, it would appear that single-sideband modulation has certain characteristics which may make it attractive for tropospheric forward-scatter systems, these include the

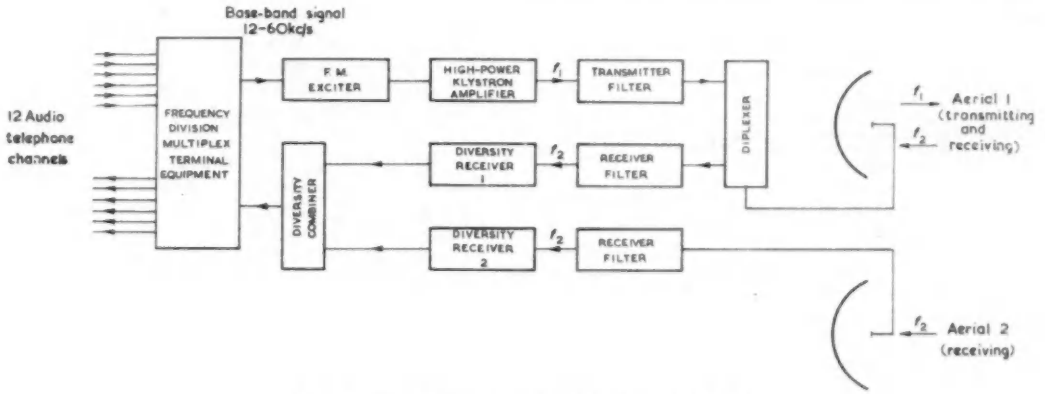

Fig. 11. Tropospheric forward-scatter link: equipment schematic

ability to operate satisfactorily at low levels of received signal due to the absence of a threshold effect, a saving of up to 10 to 1 in the frequency space required, freedom from intermodulation due to multi-path signals, reduced interference to other systems and economy in high-tension power consumption. On the other hand a high degree of amplitude linearity is essential in a single-sideband system[23].

Because of the random fading which is characteristic of scatter propagation it is usual to employ spaced-aerial or other types of diversity operation; the simpler systems employ selection of the stronger of two or more signals by switching, more advanced systems employ all the diversity signals in combination, the signal levels being automatically and continuously adjusted for optimum diversity gain before combination. A double-diversity system of the latter type yields an improvement compared with a non-diversity system of about 4dB for 50 per cent of the time and 17dB for 0·1 per cent of the time; corresponding improvements for a quadruple-diversity system are 7dB and

27dB respectively. Since the large improvements relate to the small percentages of time when the signal-to-noise ratio is poor, the advantage from diversity is specially valuable.

The use of frequency diversity is deprecated because of the additional frequency allocations required and the need to conserve the use of the spectrum.

Fig. 12 shows a quadruple-diversity system in which spaced aerials and crossed polarizations can be employed to achieve in effect four separate paths in space; it is notable that only two frequencies are employed in this system[24].

Future Developments

The future developments of line-of-sight microwave systems for main routes carrying heavy traffic is likely to be in the direction of systems transmitting perhaps 1 800

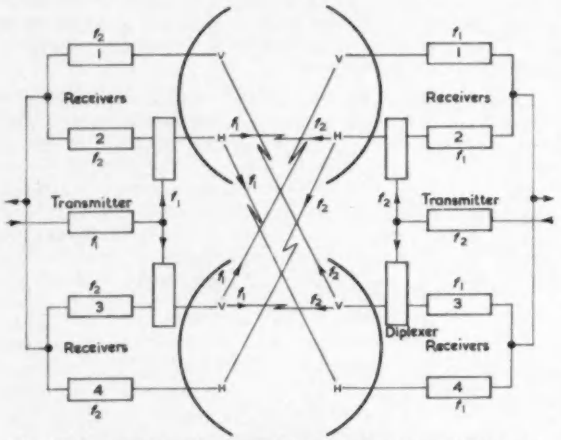

Fig. 12. Quadruple-diversity tropospheric forward-scatter radio link with spaced aerials and crossed polarization

telephone circuits, or a television channel and some hundreds of telephone circuits, on a single radio carrier; such systems could lead to substantial cost savings as compared with systems requiring several radio carriers to provide the same total capacity.

At the other end of the scale there would appear to be scope in some countries for low-capacity microwave systems accommodating up to 48 telephone circuits. In this field there is scope for printed 'micro-strip' circuits and for intermediate-frequency amplifiers and other components including time-division multiplex terminal equipment, using printed-circuit techniques and transistors where appropriate, to reduce the size, weight, power consumption and cost[25,26].

It is interesting to speculate on the advantages which low-noise solid-state microwave amplifiers, 'MASERS'[27], might bring to microwave systems; if these amplifiers enabled the noise factor of the receivers to be reduced by say 10dB and if transistors were used for the intermediate frequency and other circuits, these measures would reduce the power supply requirements for a typical main-route repeater station from several kilowatts to a few hundred watts. Standby power supplies could be provided from batteries and large engine-generator sets would be unnecessary and the volume of the radio equipment and the size of the buildings could be considerably reduced, with large cost savings.

Tropospheric forward-scatter radio systems are likely to find applications where difficulties of terrain make it impracticable or too costly to use conventional line-of-sight microwave systems or coaxial-cable systems. The disadvantages of tropospheric-scatter systems, notably their lack of spectrum economy and interference potentiality, make it unlikely that they will find wide application for normal civil communications in countries with extensive networks of conventional systems.

The future development of tropospheric forward-scatter systems is likely to include improved modulation techniques, e.g. single-sideband modulation, aiming at spectrum economy and improved performance under difficult propagation conditions. Additional spectrum economy could be achieved by the development of improved designs of aerials with smaller minor lobes, since this would reduce the number of frequency allocations needed to avoid 'over-reach' interference via the minor-lobe responses. The use of single-sideband modulation and the development of very high-power transmitters, e.g. with peak powers of up to 100kW, and exceptionally large aerials, e.g. 120ft in diameter, may be expected to lead to systems capable of providing 100 telephone circuits over distances of some 400 miles without intermediate repeater stations.

Acknowledgments

The thanks of the author are due to the Engineer-in-Chief of the General Post Office for permission to publish this article.

REFERENCES

1. DAWSON, G., HALL, L. L., HODGSON, K. G., MEERS, R. A., MERRIMAN, J. H. H. The Manchester-Kirk o'Shotts Television Radio-relay System. *Proc. Instn. Elect. Engrs. 101*, Pt. 1, 93 (1954).
2. STARR, A. T., WALKER, T. H. Microwave Radio Links. *Proc. Instn. Elect. Engrs. 99*, Pt. 3. 241 (1952).
3. ROETKIN, A. A., SMITH, K. D., FRIIS, R. W. The TD-2 Microwave Radio-relay System. *Bell Syst. Tech. J., 30*, 1041 (1951).
4. MCDAVITT, M. B. 6000 Mc/s Radio-relay System for Broadband, Long-Haul Service in the Bell System. *Alta Frequenza. 26*, No. 5. (Oct. 1957).
5. The Scatter Propagation Issue. *Proc. Inst. Radio Engrs. 43*, (Oct. 1955). (This issue contains several papers on tropospheric forward-scatter systems). See also the papers of the Symposium on Long-Distance Propagation above 30 Mc/s, held by the Institution of Electrical Engineers in Jan. 1958. (To be published as a supplement to Pt. B of the Proc. Instn. Elect. Engrs.).
6. Symposium on Communications by Scatter Techniques. I.R.E. Transactions on Communications Systems. CS-4, No. 1. (March, 1956).
7. TELFORD, M. Communications Potentialities of Tropospheric Scatter. *Point-to-Point Telecommunications. 1.* No. 2. (Feb. 1957).
8. RENDALL, A. R. A., ANDERSON, W. N. Temporary Linkages for Outside Broadcast Purposes. *Proc. Instn. Elect. Engrs. 99*, Pt. 3A, 323 (1952).
9. DAWSON, G. Portable Equipment for a Microwave Television Link. *Proc. Instn. Elect. Engrs. 99*, Pt. 3A, 379 (1952).
10. BULLINGTON, K. Radio Propagation Fundamentals. *Bell Syst. Tech. J. 36*, 593 (1957).
11. International Radio Consultative Committee (C.C.I.R.), Documents of the 8th Plenary Assembly, Warsaw, Vol. 1. (1956).
12. Joint CCIR/CCITT Committee for Television Transmissions (CMTT), Paris, Document 12 (1957).
13. LEWIS, N. W. Waveform Responses of Television Links. *Proc. Instn. Elect. Engrs. 101*, Pt. 3, 258 (1954).
14. SPEED, R. F. B. A 24-Channel Pulse-Time Modulation System. *Proc. Instn. Elect. Engrs. 102B*, 375 (1955).
15. ALBERSHEIM, W. J., SCHAFER, J. P. Echo Distortion in the Transmission of Frequency-Division Multiplex. *Proc. Inst. Radio Engrs. 40*, 316 (1952).
16. CLARRICOATS, J. B. et al. A Survey of the Theory and Applications of Ferrites at Microwave Frequencies. I.E.E. Convention on Ferrites. (Oct. Nov. 1957). (Published as supplement to Pt. B of the *Proc. Instn Elect. Engrs.*).
17. BRAY, W. J. The Travelling-Wave Valve as a Microwave Phase-Modulator and Frequency-Shifter. *Proc. Instn. Elect. Engrs. 99*, Pt. 3, 15 (1952).
18. BELLOWS, B. C. Automatic Switching for TD-2 Radio. *Bell Syst. Tech. J. 35*, 98 (1956).
19. BOOKER, H. G., GORDON, W. E. The Role of Stratospheric Scattering in Radio Communication. *Proc. Inst. Radio Engrs. 45*, 1223 (1957).
20. MELLEN, G. L. UHF Long-Range Communication System. *Proc. Inst. Radio Engrs. 43*, 1269 (1955).
21. MORENO, T. Transmitting Tubes for Scatter Communications. I.R.E. Transactions on Communications Systems. CS-4, No. 1, 64 (1956).
22. SPEAKS, F. A. Power Amplifier Klystron for UHF Transmission. I.R.E. Transactions on Communications Systems. CS-4, No. 1. 69 (1956).
23. MORROW, W. E., MACK, C. L., NICHOLS, B. E., LEONHARD, J. Single-Sideband Techniques in UHF Long-Range Communications. *Proc. Inst. Radio Engrs. 44*, 1854 (1956).
24. ALTMAN, F. J., SICHAK, W. A Simplified Diversity Communication System for Beyond-the-Horizon Links. I.R.E. Transactions on Communication Systems. CS-4 No. 1. 50 (March, 1956).
25. DUKES, J. M. C. The Application of Printed Circuits to the Design of Microwave Components. (To be published in *Proc. Instn. Elect. Engrs. 105*, Pt. B. 1958).).
26. ENGELMANN, H. et al. Portable Multi-channel 11 000Mc Radio Link. I.R.E National Convention Record. Pt. 8. 150 (1957).
27. WITTKE, J. P. Molecular Amplification and Generation of Microwaves. *Proc. Inst. Radio Engrs. 45*, 291 (1957).

Microwave Line-of-Sight Propagation

By M. W. Gough*, M.A., A.M.I.E.E.

After sketching the historical and physical background of the subject, this article surveys some fundamental investigations into microwave line-of-sight propagation made, mainly since 1939, in Europe and the U.S.A. Theoretical work, based principally on classical optical concepts, is reviewed in conjunction with related experimental investigations. Statistical processes important in the research and engineering aspects of the subject are also discussed

AT the turn of the century when Marconi was carrying out his experiments on long distance transmission on low frequencies, the theoretical study of terrestrial radio propagation was based on an idealized model of a smooth spherical earth surrounded by free space. The great discrepancy between the experimental results and the theoretical predictions led to the conclusion that a physical mechanism not included in the mathematical formulation, namely the reflection of the waves by an ionized region in the upper atmosphere, must be exerting a major influence on the propagation.

As far as the effect of the ground and of the lower atmosphere was concerned, however, the model was reasonably good. Only in very mountainous country would the ground irregularities be serious, while the effect of refraction would be small on such low frequencies where the wavelength is large compared with the scale of the atmospheric variations.

With the extension of ground wave theory to ultra high frequencies where the effect of the ionosphere is negligible, it becomes possible under most practical conditions to treat the propagation within the horizon by geometrical-optics, but the ground irregularities become of major importance, while the ray paths are curved by refraction in the non-homogeneous atmosphere. On the assumption that there is a standard atmosphere with a constant negative gradient of refractive index in the troposphere immediately above the surface of the earth, it has been shown that the propagation is equivalent to transmission through an homogeneous atmosphere, or in effect free space, over an earth with its radius increased by a geometrical transformation that removes the curvature of the ray paths.

It was not at first appreciated that variations from the assumed standard atmosphere can produce profound modifications to the nature of tropospheric propagation, though fluctuations of signal-strength, or fades, were in general attributed to temporal changes in the structure of the troposphere. With the development of radar techniques prior to and during the Second World War, evidence accumulated of long distance tropospheric propagation under conditions of extreme super-refraction and during the presence of elevated inversion layers. This phenomenon has been explained by an appropriate extension of the mathematical theory.

Further experiments after the war showed that even under normal conditions when the field-strength beyond the horizon drops away exponentially a distance is reached beyond which the average signal decreases much more slowly and persists out to great distances. These signals have been interpreted in terms of scattering by atmospheric turbulences and have become the subject of intensive study in connexion with the establishment of long distance scatter links.

The whole subject is now referred to as tropospheric propagation and includes reception within the horizon and ground-wave propagation in the presence of a standard atmosphere. It can be conveniently divided into two parts, one dealing with line-of-sight propagation and the other with propagation beyond the horizon with special reference to tropospheric scattering. The present article is concerned with the former, while the companion article by G. Millington reviews the latter with regard to the present position of research being carried out in the United Kingdom.

There is of course an intermediate situation in which the transmission distances are quite small but the propagation is not strictly line-of-sight, i.e., where local obstructions rather than the curve of the earth prevent an optical path between the transmitter and the receiver. Such conditions are of prime importance in considering the service areas of television stations, where the diffractive losses over hills have to be assessed by Fresnel 'knife-edge' theory and the variations in the meteorological factors are of secondary importance except at the fringes of the service area.

This is a specialized aspect of ground-wave propagation that will not be considered in detail here, where the emphasis will be on point-to-point links between terminals with an unobstructed path between them, but account has to be taken of the ground irregularities in considering rays reflected from the surface of the earth, and of the effect of the troposphere on the ray paths through it.

In this article microwaves will be deemed to comprise wavelengths shorter than 1m (frequencies above 300Mc/s), where, as shown in the first part of this review, many features and applications of propagation theory are borrowed from the concepts of classical optics. The second part of this survey gives examples of the statistical approach to propagation problems, necessitated by the temporal and spatial variations in the atmosphere. Space prevents discussion of much pioneering work, and this review is therefore restricted mainly to war-time and post-war investigations, when the development and operation of radar, followed by rapid advances in wide-band multi-channel radio systems, gave a great impetus to research on microwave propagation.

Optical Aspects

Ground Clearance

Reliable microwave communication necessitates a clear line-of-sight between the terminals, with the further require-

* *Marconi's Wireless Telegraph Co. Ltd.*

ment of first Fresnel zone clearance of all points on the intervening ground. Under these conditions the signal strength will be near the 'free-space' value, except for possible departures due to ground reflections and atmospheric effects discussed later. Simple formulae for the attenuation between various types of aerial in free space have been given by Friis[1], and the basic principles of microwave propagation have been briefly reviewed by Megaw[2], Bullington[3], Thompson[4] and others.

Failing first Fresnel zone clearance and disregarding secondary influences, signal strengths will fall below the 'free-space' level. Adapting classical edge-diffraction theory, Megaw[2], Bullington[3], Thompson[4] and others give charts showing the 'shadow loss' due to a specified obstructing screen at various wavelengths, while curved earth diffraction has been rigorously investigated by Eckersley[5], Millington[6], van der Pol and Bremmer[7], Burrows and Gray[8] and others. While ideally, microwave paths should maintain first Fresnel zone clearance under all atmospheric conditions, some in practice default during periods of sub-refraction and suffer consequent long-period fading. The influence of inadequate ground clearance on the statistical behaviour of such paths has been investigated experimentally by Durkee[9], Wheeler and Mathwich[10], and Thompson[4].

Ground Reflections

Ground reflections may adversely affect line-of-sight propagation because, due to siting exigencies and changing atmospheric conditions, phase opposition between direct and ground-reflected waves cannot always be avoided. In this situation near-equality in their amplitudes gives a weak signal and therefore microwave paths should where possible be chosen with small ground reflection coefficients—less than 0·5 for example. Over nearly 50 established 4000Mc/s. paths in the U.S.A., Bullington[11] has measured reflection coefficients seldom exceeding this value, and averaging about 0·28.

Much theoretical and practical study has been devoted to reflection coefficients. McPetrie[12], Kerr[13], Ohman[14] and others have published theoretical charts giving the amplitude and phase of the reflection coefficient of radio waves at a plane surface under various conditions, and confirmatory measurements have been made by Megaw[2], Ford and Oliver[15] and others. For smooth ground in the frequency range under review, the reflection coefficient is virtually unaffected by conductivity and depends only on the wave polarization, the dielectric constant and the reflection angle θ as defined in Fig. 1(a). For vertical polarization the Brewster effect, whereby the reflection coefficient becomes zero at a particular angle, always results in a lower reflection coefficient with vertical than with horizontal polarization for a specific path. Nevertheless at the shallow reflection angles characteristic of ground-to-ground propagation, which seldom exceed 2°, both polarizations give reflection coefficients near unity, and thus for land paths the controlling factor is the roughness of the ground rather than its dielectric properties.

For sea, surface roughness cannot be relied on for reducing the reflection coefficient to an innocuous level, but this disadvantage is partly offset by the fact that, for sea reflection, a pseudo-Brewster effect with vertical polarization causes a rapid initial reduction in reflection coefficient with increasing reflection angle. Thus compared with horizontal polarization, which entails coefficients very near unity in practical cases, the use of vertical polarization should reduce fading attributable to direct and sea-reflected wave interference.

Fig. 1(b), after Kerr[13], shows theoretical relationships between reflection coefficient and reflection angle for smooth sea for wavelengths between 1m and 1cm, using the best available data for dielectric constants and conductivities, which for sea water are somewhat frequency-dependent. For vertical polarization the pseudo-Brewster minimum approaches zero at very short wavelengths due to the subordinate influence of conductivity in that case. However, there is a progressive reduction in the initial slope of the curves with decreasing wavelength (Fig. 1(b)), which reduces the benefit from vertical polarization on the

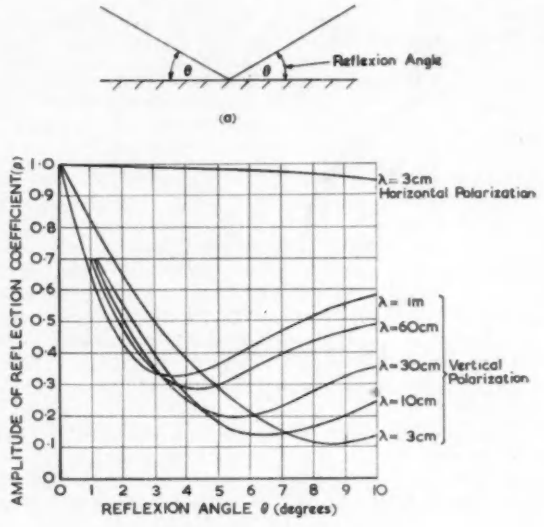

Fig. 1. Reflection coefficient versus reflection angle for sea (after Kerr)



Fig. 2. Reflection at a rough surface

shorter wavelengths. Bray and Corke[16] in fact found that vertical polarization showed no benefit over horizontal on a 3 930Mc/s optical sea path, but the present author anticipates a significant advantage on the longer microwaves.

Several workers have considered ground roughness from the statistical aspect of Rayleigh's roughness criterion, which states that reflection from a rough surface becomes diffuse when wavelets scattered from irregularities are disturbed in phase by more than a specified amount from the mean value. For a reflection angle θ, and irregularities of height δ above and below the mean level (Fig. 2) the maximum phase deviation ϕ_m from the mean value is $4\pi\delta \sin\theta/\lambda$, where λ is the wavelength. The Rayleigh criterion is variously quoted as $\phi_m > \pi/4$ or $> \pi/2$ radians. The crucial feature is the association between the reduction in reflection coefficient due to ground roughness and the quantity $\delta \sin\theta/\lambda$. Discussing vertical polar patterns of radar aerials, Norton and Omberg[17] imply that for a well developed lobe the quantity $\delta \sin\theta/\lambda$ must not exceed 1/16 throughout the first Fresnel zone for ground reflection.

Day and Trolese[18], Bullington[11] and others have deduced reflection coefficients of rough ground from interference

patterns revealed by height-gain measurements. Fig. 3 shows height-gain curves obtained on 3 microwave frequencies over the Arizona Desert, using an aircraft ranging in height between 600 and 7 700ft. The transmitting aerial remained at 190ft and the aircraft distance was about 55 miles. The depth of any signal minimum (Fig. 3) is a measure of the nearness to unity of the ground reflection coefficient for the test condition indicated. The minima are labelled with the coefficients inferred.

From 4 000Mc/s height-gain tests on 200ft towers, Bullington[11] has deduced values of the reflection coefficient, ρ, for land paths in the U.S.A. already mentioned, and has correlated these with corresponding values of ϕ_m estimated from the path irregularities. ρ ranged between 0·1 and 0·7, and a plot of ρ versus ϕ_m shows scattered points whose trend for high values of ϕ_m lies well above a theoretical curve based on random ground irregularities, but conforms better to theoretical curves based respectively on 'saw-tooth' and 'sine-wave' surfaces. Bullington

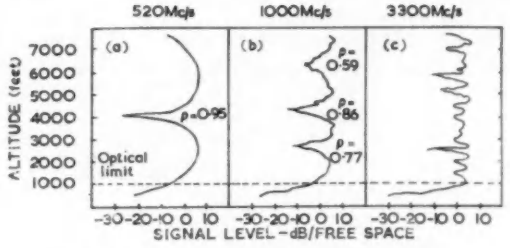

Fig. 3. Aircraft height-gain curves (after Day and Trolese)

remarks that departures from true randomness in the actual path profile are likely to increase ρ at high values of ϕ_m, in conformity with the observed trend. A discussion by Norton and Omberg[17] on Fresnel zones for a reflecting surface prompts the suggestion that Bullington's sporadic high values of ρ may have resulted from a specular reflection from surfaces comparable in size with the first Fresnel zone, which on the test frequency can be quite small. The erratic height-gain curve of Fig. 3(c), after Day and Trolese, shows a similar effect.

Ford and Oliver[15] have made extensive measurements on 9cm of the reflection coefficient of a small area of prepared ground, using a direct method needing a very short radio path (50ft), narrow beam aerials and steep reflection angles. For each polarization the reflection coefficient of smoothed sandy loam was measured in various states of wetness. Each condition was measured at 3 or 4 reflection angles ranging between 12° and 46·5°. By finding the value of dielectric constant that fitted each set of measurements best (conductivity having negligible influence at the wavelength used), Ford and Oliver obtained values of 2 and 15 for the dielectric constant of very dry and wet ground respectively. Measurements were then repeated with the ground raked into regular ridges, whose heights between crests and troughs were varied in successive experiments between 5 and 16cm. In general the results showed progressively reduced values of ρ below the 'smooth' value as θ and δ (Fig. 2) were increased. An exception to this trend sometimes occurred with vertical polarization when θ was near the Brewster angle, which varied between about 15° and 25° according to the wetness of the ground. In this critical range, roughening the ground disturbed the Brewster effect, thereby sometimes *increasing* in reflection coefficient.

Following Bullington's technique, the author has computed values of ϕ_m associated with 33 of Ford and Oliver's measurements of ρ for prepared rough ground, omitting the above-mentioned anomalous results with vertical polarization. Fig. 4 shows ϕ_m plotted against ρ/ρ_s, where ρ is the measured reflection coefficient of rough ground giving a phase deviation ϕ_m, and ρ_s is the measured reflection coefficient of the same ground when smooth. Further points on Fig. 4 are derived from height-gain tests and ground roughness estimates made by Day and Trolese[18] on 520Mc/s and 1 000Mc/s, and by Gough[19] on 504Mc/s and 9·3cm. The author has added a further point similarly obtained on 200Mc/s. On Fig. 4 a scale of $\delta \sin\theta/\lambda$, (which is simply related to θ_m) has been included because is it the fundamental parameter governing ρ/ρ_s.

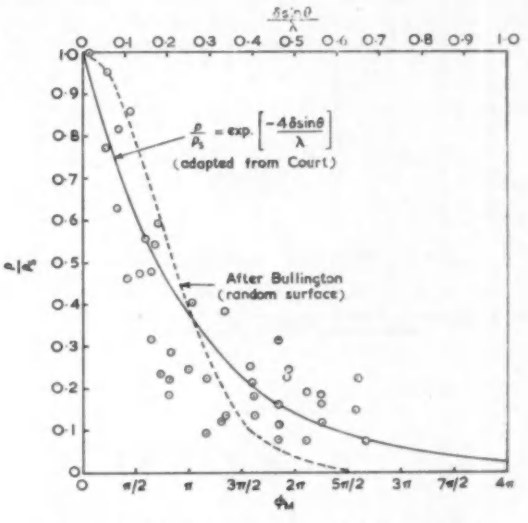

Fig. 4. Effect of ground roughness on reflection coefficient

The points on Fig. 4 scatter less than Bullington's, perhaps because they are derived mostly from artificially regular ground undulations, whereas Bullington's are taken from natural paths. The latter's theoretical curve for a random surface, which is superimposed on Fig. 4 (dotted line) lies below the experimental trend when ϕ_m exceeds about π radians.

Optical measurements made by Court[20] of diffuse reflection of monochromatic light from a matt surface have shown, for fairly shallow reflection angles, an exponential relationship between the reflection coefficient and the reflection angle. This suggests by analogy that the radio reflection coefficient ρ for a rough surface might follow the empirical law:

$$\rho/\rho_s = \exp[-c\,\delta \sin\theta/\lambda]$$

where δ and θ are defined in Fig. 2, ρ_s is the reflection coefficient of a smooth surface of the same material and c is a constant.

$c = 4$ best fits the experimental points of Fig. 4, and the resulting empirical relation

$$\rho/\rho_s = \exp[-4\,\delta \sin\theta/\lambda]$$

gives a better fit than Bullington's curve at large values of ϕ_m. Taking $\rho_s = 1$, which is justified for conventional ground-to-ground paths, the important condition that $\rho < 0{\cdot}5$ requires

$$\delta \sin\theta/\lambda > 0{\cdot}17$$

and $\phi_m > 2{\cdot}14$ radians.

From the aspect of ensuring that ground reflection from

a radio path is adequately diffuse, this condition is more stringent than the Rayleigh criteria already quoted.

Sea-Reflection Fading

Even with vertical polarization the reflection coefficient of sea-water at shallow incidence approaches unity at very short wavelengths (Fig. 1(b)), and sea paths may thus present special problems of mutual cancellation between direct and sea-reflected waves. Changes in the refractive index gradient of the atmosphere are equivalent from the propagation standpoint to changes in the radius of a fictitious earth at which reflection effectively takes place.

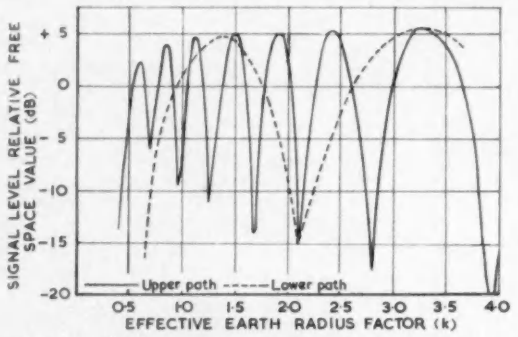

Fig. 5. Theoretical relations between signal level and K on 3930Mc/s for specific oversea paths (after Bray and Corke)

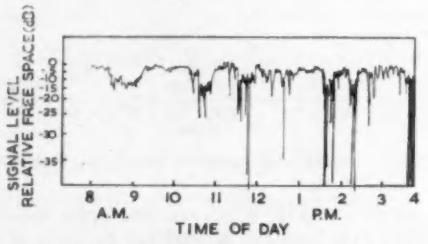

Fig. 6. Water-reflection fading on 9·2cm (after Bogle)

Thus diurnal or weather-related atmospheric changes can cause large phase shifts on microwaves between direct and water-reflected rays, leading to deep fades under conditions of phase opposition. Fig. 5, after Bray and Corke[16], shows theoretical curves relating the effective earth radius factor K to the signal level (relative to free space) expected over two 40-mile paths across the Irish Sea tested on 3 930Mc/s. The paths had a common high terminal in Ireland and respectively high and low terminals in Scotland. A fortnight's recording of October signal-levels showed that the higher path, which was seldom fade-free, faded more than 15dB for 1 per cent of the time, whereas the lower path faded to this extent for only 0·06 per cent of the time. As is evident from Fig. 5, the superiority of the lower path results from its reduced susceptibility to departures of K from the standard value of 4/3.

Several workers comment that the observed fading attributable to this mechanism is often deeper than theoretically expected after allowing for ray divergence at the curved sea surface. Bray and Corke consider that atmospheric inhomogeneities or the state of the sea surface might provide the small change in relative ray amplitudes needed to explain the observed fading. Discussing the same problem, Bogle[21] shows a theoretical expectation of deep fades when K is near infinity, but argues nevertheless that the behaviour of his 9·2cm and 3·26cm oversea records is inconsistent with the occurrence of this K-value. He concludes that direct and sea-reflected waves must be occasionally equalized by some agency which Megaw (writing privately to him), attributed to momentary defocusing of the direct ray by larger-scale refractive index fluctuations caused by turbulence.

Fig. 6 shows a record of fading of this type obtained by Bogle on 9·2cm. Smith-Rose and Stickland[22] have published similar records from line-of-sight transmissions across Cardigan Bay, showing rapid fading of about 3dB on 3cm and slow fading of about 15dB on 9·2cm. Cabessa[23] has observed severe fading on 1 200 and 2 000Mc/s over sea paths in Greece, while Gudmandsen

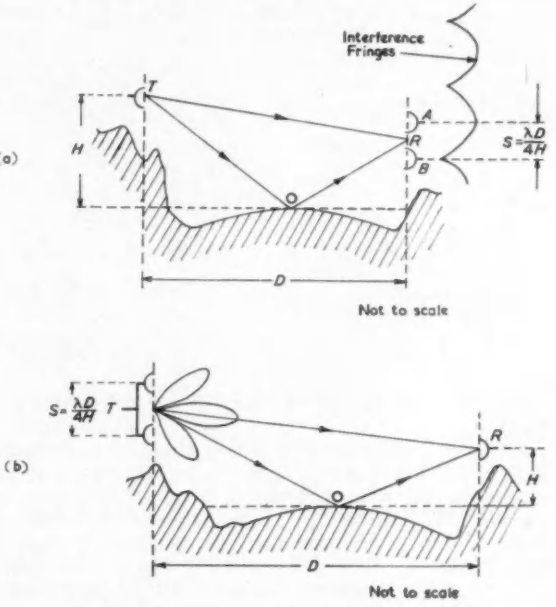

Fig. 7. Complementary diversity system (after Bateman)

and Larsen[24] have experienced similar effects over sea paths in Denmark on 17 and 6·4cm. The two last-named investigations are reviewed in some detail later.

Two-path interference by sea reflection causes an approximately sinusoidal variation of field strength with height, giving vertical interference fringes as illustrated on Fig. 7(a). Near R, the height interval S, between a point of virtually zero signal and the nearest point of maximum signal, is about $\lambda D/4H$, where λ, D, and H are respectively the wavelength, path length and the transmitter height above the tangent to the reflection point O. Bateman[25] has devised a 'complementary diversity' system whereby two receiving aerials A and B (Fig. 7(a)) are vertically spaced by the specified amount, S. When the effective earth radius factor, K, alters, the interference fringes move bodily past the aerial system with little change in the fringe height, S, for paths well within visual range. Thus zero signal from one aerial is always accompanied by a large signal from the other. To exploit this effect fully, Bateman suggests an attractive alternative to the conventional use of separate diversity receivers on each aerial, namely linking the two aerials directly together so that, used for transmission for example, they direct a null towards the reflecting sea at O, and a lobe towards the receiver at R as in Fig. 7(b), thus virtually eliminating the sea reflection. The requisite spacing for this condition is,

as might be expected, identical with that already defined for complementary diversity reception. In fact the linked aerial system functions equally as a receiving array, thus abolishing the necessity of a second diversity receiver in this special case, where a coherent amplitude and phase pattern allows suitably spaced aerials to be paralleled to give a nearly constant joint signal while K varies.

Another application of spaced aerials propounded by Bateman is the suppression of injurious multi-path signals propagated by lateral reflections from hills, etc., flanking the radio path. In this case the aerials are spaced an appropriate distance horizontally.

Fresnel Zones

By analogy with classical edge-diffraction theory, Norton and Omberg[17] give general formulae for the dimensions and position of the N^{th} Fresnel zone for reflection at an unbounded flat surface. The reflected wave is the resultant of contributions from an infinite number of half-period (Fresnel) zones on the plane surface, but near-cancellation between adjacent zones (which comprise elliptical rings), results in most of the reflected energy coming from the first zone, which is thus of fundamental importance in evaluating the reflecting ability of surfaces of limited area.



Fig. 8. Use of a flat mirror as a passive reflector

To reflect as well as a limitless plane area, a flat surface must compare in size with the first Fresnel zone. This zone is an ellipse, such that the length of a diffracted ray path via the edge of the zone is half a wavelength longer than the geometrically reflected ray path. For ground-to-ground propagation the ellipse is always elongated in the direction of transmission and its size, which depends on the path geometry, always decreases with the wavelength. Thus the shorter the wavelength the smaller the surface needed for specular reflection.

Passive Reflectors

When intervening obstructions prevent direct microwave communication, a link is sometimes achievable by erecting a suitably angled flat radio mirror on a prominent site visible from each terminal. Andrieux[26] outlines the principle for a flat mirror (Fig. 8) which is far enough from the terminals T and R for the contributions from all points on the mirror to be virtually in phase at the receiver, i.e., the mirror spans only a small portion of the first Fresnel zone.

Andrieux defines the efficiency of the system by the ratio:

$$\frac{\text{Power received via the mirror}}{\text{Power received over a direct path of equal total length in free space}}$$

which amounts to $A_p^2(d_1 + d_2)^2/\lambda^2 d_1^2 d_2^2$,

where A_p is the mirror area projected on the aperture plane of the aerial T or R, d_1 and d_2 are specified on Fig. 8 and λ is the wavelength. For a practicable mirror size, good efficiency requires d_1 or d_2 to be small and the wavelength to be short. Moreover the reflection angle θ must be large enough to avoid an unduly small projected area A_p. This last limitation can be overcome by a 'periscope' system (included in Fig. 9) whereby two mirrors M_1 and M_2 spaced a few feet apart ensure steep reflection angles θ_1 and θ_2 even when the incoming and outgoing rays are parallel.

Chaux and Dascotte[27] describe an elaborate installation in Morocco, shown diagrammatically in Fig. 9, for providing 9·5cm communication without active repeaters between two low-lying points T and R. A single mirror M_3 was erected on a hill which is optical to R but not to T, thus necessitating a second mirror system M_1M_2. The latter was of the 'periscope' type because T, M_1M_2 and M_3 are nearly collinear. The mirrors, all of 10m² area, were made of flat aluminium sheet. The system is inefficient according to Andrieux's definition, due to unsuitable topography and the rather small mirrors used, but performance was within 6dB of the theoretical figure. Autumn and winter tests showed little fading despite sandstorms, fog and snow.

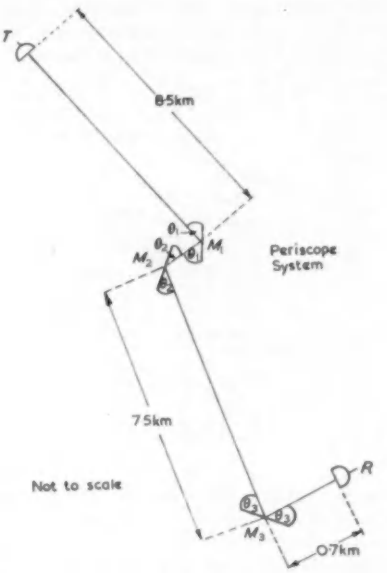

Fig. 9. Passive reflector chain in Morocco (after Chaux and Dascotte)

Magnuski and Koch[28] describe a passive reflector for a 6 700Mc/s link for a hydro-electric scheme in the U.S.A. The single mirror, of area 480ft², was 1¼ miles from the nearer radio terminal. The predicted system performance, closely approached on test, was only 7dB below the free space figure. The mirror required a flatness tolerance of $\pm\frac{1}{4}$in to satisfy Rayleigh's roughness criterion, and an angular tolerance of about $\pm 0{\cdot}13°$ to keep the reflected beam aligned on the receiver.

Zonal Screens

Bussey[29] has devised a means of suppressing microwave ground reflections by erecting, broadside to the direction of propagation, a suitable screen at the geometrical reflection point for flat ground. It can be shown that the reflected field contributed by half the first Fresnel zone (e.g. the unshaded part of the ellipse on Fig. 10) exactly cancels the contribution from the remaining Fresnel zones. Thus if a screen blocks contributions from the other half of the first Fresnel zone (shown shaded on Fig. 10) the reflected wave is sensibly zero. This requirement is met, among other possible shapes of screen suggested by Bussey, by an opaque quadrant of radius equal to the half-width of the first Fresnel zone, located as illustrated in Fig. 10. Experiments

showed a very useful reduction in ground reflection, and the system is stated to be tolerant of small siting errors and variations in the effective earth radius factor. For 20 to 30 mile paths on 4 000Mc/s Bussey specifies, without complete dimensional details, a rectangular screen mounted on 40ft poles at mid-path.

Fading Mechanisms

The atmosphere causes intermittent fading of varying degrees over most microwave paths. While absorption due to fog, snow, rain etc., which has been discussed by Ryde[30] and others, is very small below 5 000Mc/s, the redistribution of transmitted energy due to small spatial variations in the atmospheric refractive index can produce large changes in received signal strength.

Several investigators have distinguished between the various situations giving rise to fading illustrated on Fig. 11. Fig. 11(a) relates to sea-reflection fading already discussed, in an atmosphere whose refractive index gradient varies with time. While most prevalent over water paths, this type of fading can also occur over flat land. Cabessa[23]

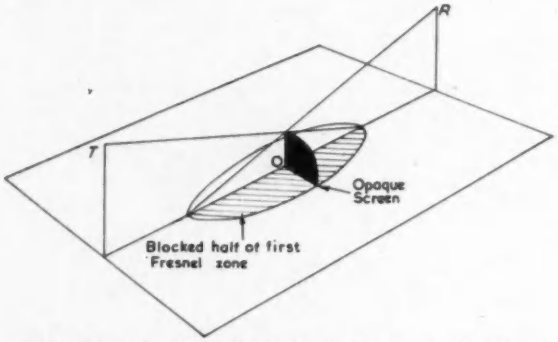

Fig. 10. Suppression of ground reflection by zonal screen (after Bussey)

and Thompson[4] mention the possibility of fading from interfering reflections at an elevated inversion layer (Fig. 11(b)), involving a sharp discontinuity in the vertical refractive index gradient. Millington[31] has shown that such a layer has unity reflection coefficient when the grazing angle is less than a critical value depending only on the total change of refractive index across the layer. Small changes in its height or structure can cause large phase shifts between direct and layer-reflected waves, which can promote deep fading under the conditions described. Above the critical angle, which seldom exceeds $\frac{1}{2}°$, layer reflections and the associated fading decline very sharply.

When an elevated inversion layer separates terminals of widely differing altitudes (Fig. 11(c)), total or near-total reflection at the layer's lower surface may prevent transmission through it to the receiver. The formation and disintegration of this layer, or changes in its height or structure, may promote and later destroy this critical condition, thus again causing fading. Crawford and Jakes[32] emphasize that this fading, not being an interference effect, is not subject to diversity improvement. Rivet[33] points out that it can be long-lasting. A similar effect, associated with trapping within a duct, may occur when the lower terminal lies within the layer. In this case the fading is explainable, with certain reservations, in terms of total internal reflection at the layer's upper boundary.

With shortening wavelength, propagation is increasingly influenced by random irregularities in the atmospheric refractive index, whose existence has been directly revealed in fine detail by microwave refractometer measurements made by Essen[34] in the laboratory and by Bussey and Birnbaum[35] in aircraft. By using 4 000Mc/s pulses of 3mμsec duration over a 28-mile path devoid of ground reflections, de Lange[36] has revealed the simultaneous presence on summer nights of two or three distinct radio paths through the atmosphere (Fig. 11(d)), resulting from the irregularities just discussed. Pulses travelling by these paths had a maximum time separation of 7mμsec, corresponding to a 7ft path difference. It was inferred from fading observations that path differences of only 6in were sometimes present. In this situation a c.w. transmission would be subject to interference fading between the multiple paths.

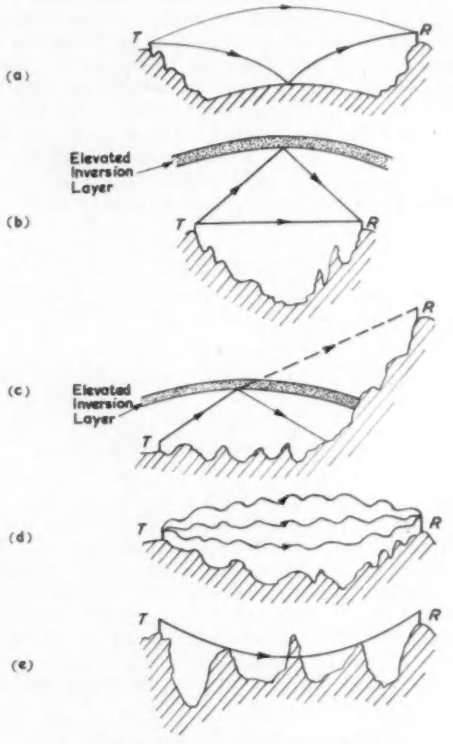

Fig. 11. Situations promoting microwave fading

Several other workers have strikingly illustrated this effect with oscillograph displays of changing microwave signal levels as the transmitted frequency was quickly and linearly varied through 400Mc/s in the 4 000Mc/s band. Fig. 12 shows samples of many traces obtained by Kaylor[37] over a path in Iowa having negligible ground reflections. During summer nights the traces often changed significantly within a few seconds. Mathematical synthesis of the observed waveforms revealed the amplitudes and delay times of the significant signal components, of which the following table is a sample:

Signal amplitude relative to that of first pulse received	1	0·45	0·26	0·10	0·115	0·025	0·02
Delay time, millimicroseconds, or path difference, feet	0	0·122	0·370	2·86	3·14	3·9	12·1

Kaylor draws the following conclusions:

(1) All deep fades are frequency-selective, and associated with a general loss over the band of about 10dB relative to the daytime level, due probably to short-delay signals of substantial amplitude.

(2) All deep fades need 4 to 6 components for adequate synthesis.

(3) Although weaker than short-delay components, long-delay components critically influence the shape of deep fades.

Crawford and Jakes[32] describe similar observations over another path in conjunction with conventional recording of an undeviated 4 195Mc/s transmission. The authors observed level frequency-sweep patterns during daytime when the conventional recording showed a 'free-space' level, and also when signals occasionally exceeded the free-space value by 10 to 15dB (a condition tentatively

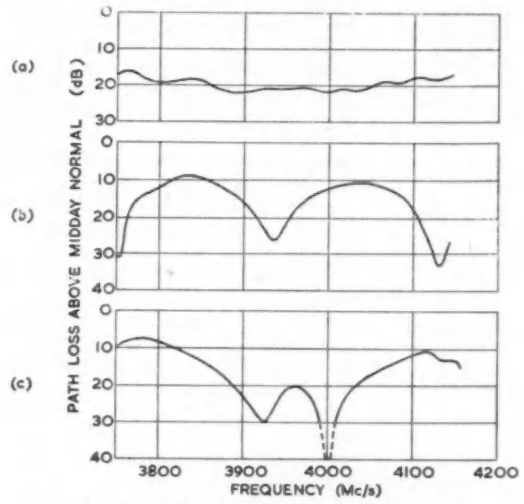

Fig. 12. Typical path loss-frequency curves (after Kaylor)

attributed to trapping or focusing within a surface duct). At night behaviour resembled that found by Kaylor[37], exhibiting several signal components with delays up to 10 mμsec.

The authors supplemented these observations with vertical angle-of-arrival measurements on 24 000Mc/s, made by nodding an aerial of 0·12° vertical beamwidth through an angle of 2°. The system could detect changes of 0·05° in vertical arrival angle. During daytime a single ray was usually indicated, while at times of exceptionally strong signal this widened into a solid wedge of rays, (plausibly attributable to focusing) covering a sector of 0·8°. At night three individual rays separated by about 0·25° were sometimes seen, or two rays about 0·5° apart appeared.

The three techniques just described convincingly demonstrate that, under temperate summer conditions, microwave paths may carry three or more signal components with maximum delays of about 10mμsec. De Lange[36] notes that this dispersion limits the ultimate performance of microwave multiplex systems.

Paths with small ground clearance may fade due to a spell of atmospheric sub-refraction causing significant diffraction loss through reversed ray bending (Fig. 11(e)). Over a 37½ mile near-grazing path, Thompson[3] has observed 30dB fades on 4 000Mc/s clearly attributable to this mechanism. He calculates that under these conditions the reversed ray radius of curvature was 5·5 times the earth's radius, equivalent to an effective earth radius factor of only 0·85.

Diurnal and Seasonal Variations

Microwave propagation is profoundly affected by refractive index variations in the lower atmosphere amounting to only a few parts in a million, and thus diurnal, seasonal and weather changes are reflected in propagation behaviour. Many workers have noted the disturbing effects of nocturnal temperature inversions near the ground, caused by cooling of land by radiation on clear windless nights.



Fig. 13. 9·2cm fading on a summer radiation night (after Megaw)

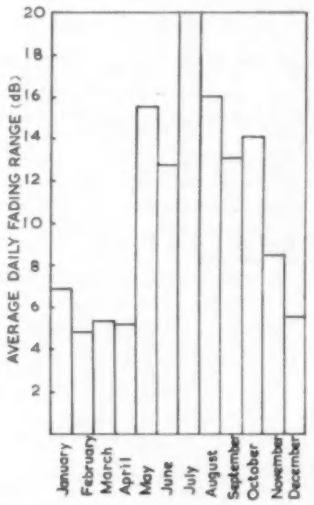

Fig. 14. Seasonal fading variations on 6·5cm (after Durkee)

Particularly during summer, an associated humidity lapse assists the inversion in forming a ground-based or slightly elevated super-refracting layer which can enhance signal strength by reducing diffraction losses, or cause fades from layer reflections at grazing incidence. The latter effect is illustrated on Fig. 13, after Megaw[2], which shows pronounced nocturnal fading on 9·2cm over a 38 mile land path near London. Discussing prolonged tests over this path, Megaw[2] and Smith-Rose and Stickland[22] note the tendency to abnormally high signal strengths on cloudless summer nights, while Bray and Corke[16] mention early morning fading in similar conditions over a neighbouring 28 mile path tested on 3 930Mc/s. Bean[38], discussing 1 046Mc/s tests between a mountain site in Colorado and a low site 70 miles away, notes maximum fading at night between May and September, always associated with low-level irregularities in vertical refractive index gradient measured near the path.

Durkee[9], and subsequently Millar and Byam[39], have made

long-term signal recordings over a 42 mile land path near New York, using wavelengths ranging from 42 to 1·25cm. Diurnal variations, pronounced in summer and weak in winter, showed maximum fading in early morning and a stable period round noon, with fading generally increasing in severity with decreasing wavelength. Fig. 14, after Durkee, illustrates the enhanced fading in summer characteristic of all wavelengths and most land paths.

Vecchiacchi[40] and Carassa[41] have noted similar effects during 500 and 1 000Mc/s tests over 'high-low' land paths in Italy, ranging in length between 83·5 and 196km. Fading, which was generally worst in August and least in March, was deeper and more rapid on the higher than on the lower frequency. Fig. 15 from the above authors, which covers

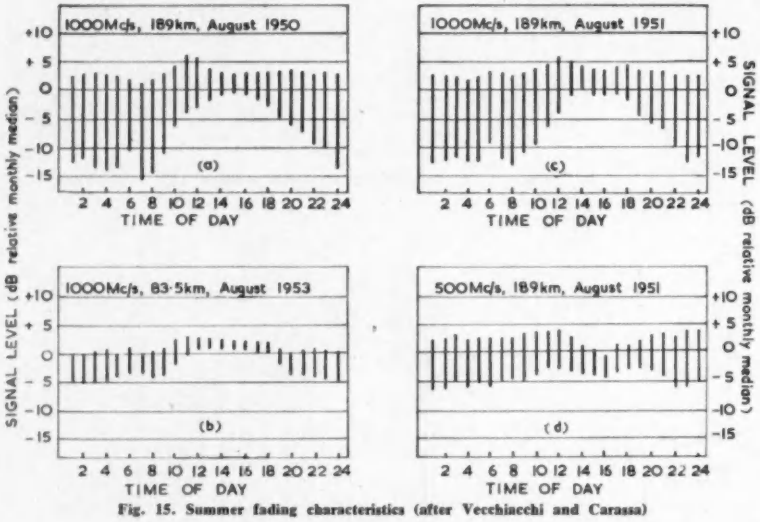

Fig. 15. Summer fading characteristics (after Vecchiacchi and Carassa)

three separate years, shows median values of maximum and minimum signal strength for each hour of the day for the whole of August, and for two paths. The charts show the increased variability characteristic of the higher frequency and the longer path. The reduced fading between 1 200 and 1 800 hours results from the minimizing of atmospheric stratification during this period by convection above heated ground. It is noteworthy that 1 000Mc/s variations over the longer path altered very little in two successive years.

Day and Trolese[18] have investigated diurnal changes over a 27 mile path in the Arizona Desert, using 5 microwave transmissions and numerous aerial heights up to 190ft. Simultaneous meteorological soundings showed the regular recurrence between 1 800 and 0 900 hours of a ground-based super-refracting layer 100 to 200ft thick, which in early morning intensified into a weak surface duct. During the rest of the day refraction was generally slightly substandard. Hourly height-gain tests reflected the diurnal atmospheric changes. Between 0 900 and 1 800 hours, regular interference fringes due to ground reflection were evident on 3 300 and 9 375Mc/s, but after 1 500 hours the fringes progressively contracted due to increasing surface refraction. By 1 900 they had become completely incoherent. Random patterns persisted until about 0 900 next morning, when conventional fringes reappeared with the return of normal atmospheric conditions. It is significant that, apart from some signal strength enhancement near the ground, height-gain curves on 1 000 and 520Mc/s were hardly influenced by the nocturnal duct.

For sea paths, particularly when they are well clear of coast lines, diurnal variations may be intermittent or totally absent, for reasons connected with the sea's thermal properties. Gudmandsen and Larsen[24] have occasionally observed oversea diurnal effects on 17 and 6·4cm, with maximum variations in late afternoon. They also observed seasonal variations with maximum variability in spring. A 9·2cm path across Cardigan Bay, discussed by Megaw[2] and Smith-Rose and Stickland[22], exhibited no diurnal effects, and judged by variations in mean daily signal strength appeared free of seasonal variations also.

Weather Influences

Broad generalizations can be made on the effects of weather on microwave propagation. Calm cloudless weather promotes nocturnal signal variations over land paths of the type discussed by Megaw[2], Smith-Rose and Stickland[22], Bray and Corke[16], and Bean[38]. Vecchiacchi[40] and Carassa[41] have observed long periods of stable signal in rainy weather. Millar and Byam[39] noted low signal strength on 9 550Mc/s, connected with prolonged thick fog, while lower frequencies were unaffected. Smith-Rose and Stickland have noted both low and high signal strengths associated with fog on separate occasions. Disturbances from frontal conditions have been observed by the above and by Mismé[42], who also treats the effect theoretically. Tests described by Klein[43] over a 106km path in the Swiss Alps illustrates the remarkable absence of fading peculiar to high altitude paths. Signal variations in June on 15cm amounted to only ±6dB, a fact attributed by Klein to the prevention of atmospheric stratification by vertical air currents in Alpine valleys, and to the low humidity.

A theoretical investigation by Ryde[30] has shown that while the attenuation due to all kinds of precipitation and fog increases rapidly with frequency, it is negligible below 5 000Mc/s. At 10 000Mc/s, rain covering a 30 mile path might cause an attenuation of about 5dB.

Statistical Aspects

Random processes inherent in microwave propagation through an inhomogeneous atmosphere necessitate a statistical approach to many problems. Many useful methods of statistical analysis, which cannot all be discussed here, have been employed by Gudmandsen and Larsen in an exhaustive investigation of oversea microwave propagation in Denmark, and by other authors already mentioned. It must suffice here to discuss a few points of particular statistical interest and importance.

Statistical Properties of Fades

Investigation of the statistical character of fading is becoming increasingly important, not only in connexion with signal reliability and its improvement by diversity systems, but also in relation to the speed of fading, which influences the phase stability of the received signal. With the rapid development of f.m. multiplex systems carrying progressively more channels, crosstalk and noise introduced by fluctuations in the phase of the received signal may become significant.

Gudmandsen and Larsen[24], Wheeler and Mathwich[18] and others have observed that the durations of microwave

fades below a given level have an approximately log-normal distribution, so long as the path has sufficient clearance to avoid diffraction losses during subrefraction periods. The average duration of fades, which is of considerable interest, decreases with the reference level. Fig. 16, after Gudmandsen and Larsen, shows observed relations between the reference level and the average fade duration below this level for oversea transmissions on 17cm and 6·4cm during a 24 hour period. The curve clearly indicates the more rapid fading on the shorter wavelength for all but very high levels.

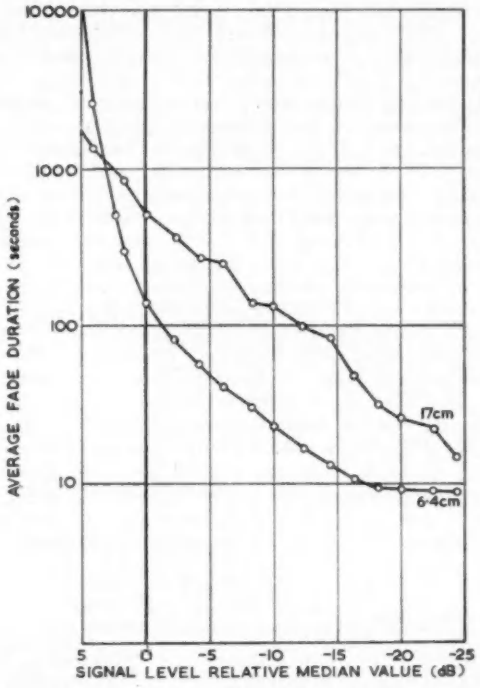

Fig. 16. Relation between signal level and fade duration for oversea path (after Gudmandsen and Larsen) Path length, 82km Test period, 24hr

The above-mentioned workers found that the speed of fading expressed in dB/sec (both up and down) tended to increase with decreasing level. A day's test over a sea path on 6·4cm showed that for levels at least 8dB below the median, speeds as high as 4dB/sec (averaged over a 5sec interval) occasionally occurred. In general, low speeds were commoner than high speeds at all levels, and high speeds became progressively rarer with increasing level.

The Inference of Propagation Mechanisms from Fading Statistics

Fig. 17 is a cumulative distribution derived from a fortnight's measurements by Bray and Corke[16] of a 3 930Mc/s sea path already discussed. Assuming propagation confined to direct and water-reflected paths, the expected behaviour in terms of the effective earth radius factor, K, is described by the full line (upper path) on Fig. 5. Because of the multiple nulls covered by the probable range of K, the phase difference between ray paths is virtually random when K varies. Changes in K alter the divergence factor at the sea surface, and thus the received signal is the resultant of two components in virtually random phase whose relative amplitudes are related to K in calculable way. Assuming a certain probability distribution of K-values, a theoretical signal strength distribution can be calculated for comparison with the experimental curve. The dotted line on Fig. 17 shows such a curve, based on statistics of K-values derived by Gough[44] from oversea v.h.f. tests in the mediterranean, where it appeared that K was approximately Gaussianly distributed. Despite the possible inappropriateness of this distribution to the present path, agreement is good for levels exceeded for less than 95 per cent of the time. The progressive divergence above 95 per cent is associated with the unexpectedly deep fading noted by various workers. The discrepancy might be explained by a third small randomly phased component (itself possibly the resultant of many others) caused for example by turbulence or weak reflection from an inversion layer.

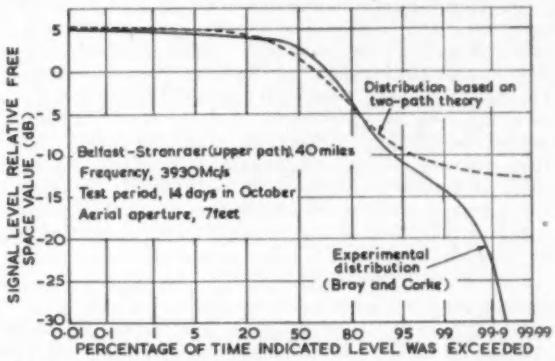

Fig. 17. Cumulative distribution for oversea path (after Bray and Corke)

Signals comprising many components having various amplitudes in random phase should show a Rayleigh distribution when the test period avoids long-term influences such as sub-refraction. Gudmandsen and Larsen[24], Cabessa[23], and Kaylor[37] give many distributions for periods of an hour and upwards which approximate well to Rayleigh's law. Long-term measurements of sea paths made by the first three investigators for periods up to five months show fading close to the Rayleigh value and median levels often significantly below free space. The latter effect may derive from reduction in aerial gain due to a non-uniform field across the aerial aperture in the presence of multiple ray paths. The 'single aerial' curve on Fig. 18, after Cabessa, shows a distribution derived from a 5 months' oversea test on 2 000Mc/s, with Rayleigh's distribution (curve (a)) added for comparison. The path in question has sufficient clearance to preclude the possibility of diffraction losses during sub-refraction periods, which may partly explain its long-term conformity with Rayleigh's law.

It is noteworthy that while the long-term distributions of Cabessa and Gudmandsen and Larsen indicate the general presence of multiple ray paths, Bray and Corke's oversea test (Fig. 17) points to dominantly two-path propagation, for reasons possibly connected with the persistence of a well-mixed atmosphere in the latter case.

The statistical investigation of fading mechanisms is complicated by field variations across the aerial due to multi-path effects. Increasing the aerial aperture increases the chance, at any instant, of a usable field somewhere in the aperture, with consequent reduction in fading. Cabessa, using small aerials over a sea path, measured a fading range of 37dB on 1 200Mc/s, while simultaneous measurements on 2 000Mc/s over the same path with 10ft paraboloid aerials showed fades of only 25dB.

Table 1 lists representative observed fading characteristics in temperate regions under the conditions specified. The fading depth, expressed relative to the median level, is

here defined as the depth exceeded for 0·1 per cent of the time. Rayleigh fading on this basis amounts to 28dB.

Diversity Effects

As is well known, fades due to multi-path transmission are not always synchronized when separately received at two points spaced a sufficient distance apart. A like effect occurs when two transmissions over a common radio path differ sufficiently in frequency. In the frequency band under discussion, space and frequency diversity systems exploiting this principle can provide a useful increase in circuit reliability. The subject has been treated theoretically by Jelonek, Fitch and Chalk[45], with illustrative statistics derived from microwave measurements made in Wales.

For maximum diversity advantage, fading on one channel must always be accompanied by high signal strength on the other, such that the correlation between signals is -1. This condition, termed by Bateman[25] 'Complementary Diversity', can only exist with coherent two-path propagation, e.g., the situation approached in Bray and Corke's oversea test (Fig. 17). For two randomly fading signals (for example of the commonly experienced Rayleigh-distributed type), correlation can be zero but not negative. Experimental observation of negative correlation indicates either the existence of two coherent waves or the presence of sampling errors due to finite measuring time.

Only the important case of two independently fading signals (between which the correlation is zero) can be considered here. If each signal falls below the usable threshold level for a fraction p of the time, they are both unusable together for only p^2 of the time, which may represent a large improvement in reliability. Even when, as often occurs, some correlation between channels remains, a valuable diversity gain may still be obtainable.

The dotted curves on Fig. 18, given both by Cabessa[23] and Gudmandsen and Larsen[24], show (a) the conventional

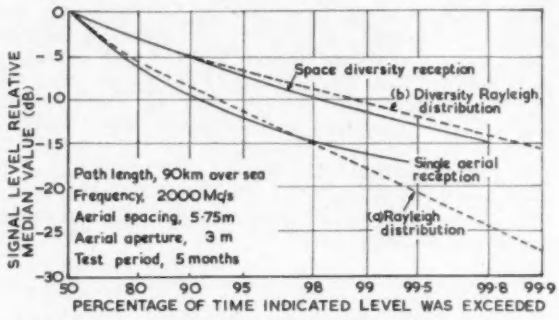

Fig. 18. Effect of space diversity on oversea path (after Cabessa)

Rayleigh distribution and (b) the diversity Rayleigh distribution based on the selection of the strongest of two independently fading Rayleigh signals. The full-line curves, after Cabessa, show distributions for a 90km sea path obtained respectively with single-aerial reception (already discussed) and with diversity reception using 5·75m (vertical) aerial spacing. This diversity performance approximates well to theoretical expectation, indicating satisfactory independence between the two signals. Cabessa considers that for best results over short paths, the diversity spacing should correspond to the distance between 'bright' and 'dark' interference fringes for reflection at a flat earth. In the present case his spacing somewhat exceeds this figure, but this is of small consequence because Rayleigh-type rather than two-path propagation is dominant, so that any spacing exceeding a certain minimum will suffice.

For a 120-km sea path, which Cabessa considers to be the limiting distance for a high quality microwave link, fading with appropriate space diversity was 2dB worse, on a 0·1 per cent basis, than the diversity Rayleigh value.

TABLE 1

Representative Microwave Fading Depths

INVESTIGATOR	PATH LENGTH (Miles)	PATH LENGTH (Km.)	DESCRIPTION	WAVELENGTH OR FREQUENCY	TEST PERIOD	FADING DEPTH EXCEEDED FOR 0·1% OF THE TIME (dB)
Bray and Corke[16]	28	45	Overland, near London	3930Mc/s 3930Mc/s	0200-0300 hours throughout May* (All hours in May except 0100-0400)	36 13
Kaylor[27]	31	50	Overland, Iowa, U.S.	4190Mc/s	July and August	27
Millar and Byam[39]	42	68	Overland, near New York	16·2cm 7·2cm 4·7cm 3·1cm	Jan.-March inclusive June-Oct. inclusive† Jan.-March inclusive June-Oct. inclusive† Jan.-March inclusive June-Oct. inclusive† Jan.-March inclusive June-Oct. inclusive†	6 17 10 18 12 21 22 24
Vecchiacchi[40]	117	189	Overland, N. Italy	1000Mc/s	August†	27 (extrapolated)
Carassa[41]	117	189	Overland, N. Italy	500Mc/s	August†	20 (extrapolated)
Bray and Corke[16]	40	65	Upper oversea path, Irish Sea	3930Mc/s 3930Mc/s	Single hour of worst fading in May‡ Fortnight in October‡	40 25
Cabessa[23]	56	90	Oversea, Greece	2000Mc/s	Jan.-June inclusive	24 (extrapolated)
Gudmandsen and Larsen[24]	51 51 33½ 33½	82 82 54 54	Oversea, Denmark	17cm 6·4cm 17cm 6·4cm	August-Sept. inclusive August-Sept. inclusive April-July inclusive 10 days in May	24 20 26 29

* *Diurnal period of worst fading.* † *Season of worst fading.* ‡ *No diurnal variations.*

Fig. 19 shows a 4 hour simultaneous record of diversity signals over this path. The resultant fading is defined by the upper boundary of the chart. While major fades on the two channels are mostly out of step, there is occasional synchronization, as for example at *S*. This is of course to be expected on statistical grounds when Rayleigh's law operates. With coherent two-path propagation diversity reception could theoretically be made virtually fade-free, and any lapse would have to be explained by some agency which attenuated each ray path about equally, e.g., fading of types (c) and (e) on Fig. 11.

Gudmandsen and Larsen have made oversea diversity tests on 17 and 6·4cm, using aerials vertically spaced at such a distance as to avoid synchronized fading on a two-path basis with the range of atmospheric refraction likely to occur. Like Cabessa, they found good agreement with the diversity Rayleigh law for test periods of about a month. For single days, however, diversity gave sometimes less and sometimes more improvement than expected from this law. The occasional betterment of expectation suggests the spasmodic occurrence of coherent two-path propagation, as opposed to the apparently predominating multi-path propagation.

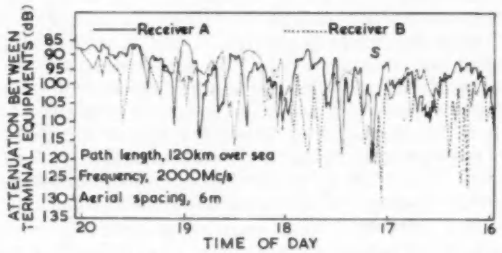

Fig. 19. Space diversity reception over a sea path (after Cabessa)

With the aim of mitigating fading by frequency diversity, Kaylor[37] has measured the frequency separation between two microwave transmissions over a common path required to avoid correlation between fades on the respective channels. He found that the requisite frequency separation increased with the depth of fading encountered. For example, in the 4 000Mc/s band, fading of 10dB required a separation of 40Mc/s to avoid correlation, while fading of 20dB required a separation of 160Mc/s.

Compared with long established h.f. ionospheric techniques, and with the scatter systems now rapidly evolving, the exploitation of diversity principles on conventional microwave links is still in its infancy. Under the stimulus of demands for increased information-carrying capacity with high circuit quality, coupled with the economic advantage of extended ranges, it is likely that this field will see much development in the near future.

Acknowledgments

The author wishes to thank the Engineer-in-Chief, Marconi's Wireless Telegraph Company Limited, for permission to publish this article. He is further indebted to Mr. G. Millington for the Introduction to the article, and to the last named and Mr. G. A. Isted for helpful suggestions. The assistance of Mr. F. Immirzi with statistical computations is also acknowledged.

The author acknowledges the use of illustrations from the following publications: The Journal and the Proceedings of the Institution of Electrical Engineers; The Proceedings of the Institute of Radio Engineers; The Bell System Technical Journal; L'Onde Electrique; Annales de Radioélectricité; Alta Frequenza; Acta Polytechnica; Electronics; Tele-Tech.

REFERENCES

1. Friis, H. T. A Note on a Simple Transmission Formula. *Proc. Inst. Radio Engrs. 34*, 254 (1946).
2. Megaw, E. C. S. Experimental Studies of the Propagation of Very Short Radio Waves. *J. Instn. Elect. Engrs. 93*, 79 Pt. 3A (1946).
3. Bullington, K. Radio Propagation at Frequencies Above 30Mc/s. *Proc. Inst. Radio Engrs. 35*, 1122 (1947).
4. Thompson, L. E. Microwave Propagation Experiments. *Proc. Inst. Radio Engrs. 36*, 671 (1948).
5. Eckersley, T. L. Ultra-Short-Wave Refraction and Diffraction. *J. Instn. Elect. Engrs. 80*, 286 (1937).
6. Millington, G. The Diffraction of Wireless Waves Round the Earth. *Phil. Mag. 27*, 517 (1939).
7. Van der Pol, B., Bremmer, H. The Propagation of Radio Waves Over a Finitely Conducting Spherical Earth. *Phil. Mag. 25*, 817 (1938).
8. Burrows, C. R., Gray, M. C. The Effect of the Earth's Curvature on Ground-Wave Propagation. *Proc. Inst. Radio Engrs. 29*, 16 (1941).
9. Durkee, A. L. Results of Microwave Propagation Tests on a 40-mile Overland Path. *Proc. Inst. Radio Engrs. 36*, 197 (1948).
10. Wheeler, B. F., Mathwich, H. R. Use of Distribution Curves in Evaluating Microwave Path Clearance. *Proc. Inst. Radio Engrs. Trans. on Instrumentation*, 31 (Oct. 1955).
11. Bullington, K. Reflection Coefficients of Irregular Terrain. *Proc. Inst. Radio Engrs. 42*, 1258 (1954).
12. McPetrie, J. S. The Reflection Coefficients of the Earth's Surface for Radio Waves. *J. Instn. Elect. Engrs. 82*, 214 (1938).
13. Kerr, D. E. Propagation of Very Short Waves—Pt. 2. *Electronics 21*, 118 (Feb. 1948).
14. Ohman, G. P. Universal Curves for the Vertical Polarization Reflection Coefficient. *I.R.E. Trans. on Antennas and Propagation*, p. 140 (Jan. 1957).
15. Ford, L. H., Oliver, R. An Experimental Investigation of the Reflection and Absorption of Radiation of 9-cm. Wavelength. *Proc. Phys. Soc., Lond. 58*, 265 (1946).
16. Bray, W. J., Corke, R. L. A Technique for 4000-Mc/s Propagation Testing for Radio-Relay Systems. *Proc. Instn. Elect. Engrs. 99*, Pt. 3A, 281 (1952).
17. Norton, K. A., Omberg, A. C. The Maximum Range of a Radar Set. *Proc. Inst. Radio Engrs. 35*, 4 (1947).
18. Day, J. P., Trolese, L. G. Propagation of Short Radio Waves Over Desert Terrain. *Proc. Instn. Radio Engrs. 38*, 165 (1950).
19. Gough, M. W. V.H.F. and U.H.F. Propagation Within the Optical Range. *Marconi Rev. 12*, 121 (1949).
20. Court, G. W. G. Determination of the Reflection Coefficient of the Sea for Radar Coverage Calculation by an Optical Analogy Method. *Proc. Instn. Elect. Engrs. 102B*, 827 (1955).
21. Bogle, A. G. Some Aspects of Microwave Fading on an Optical Path Over Sea. *Proc. Instn. Elect. Engrs. 99*, Pt. 3, 236 (1952).
22. Smith-Rose, R. L., Stickland, A. C. An Experimental Study of the Effect of Meteorological Conditions Upon the Propagation of Centrimetric Radio Waves. *Phys. Soc. and Ryl. Met. Soc. Report of a Conference on Meteorological Factors in Radio-Wave Propagation*, p. 18 (1946).
23. Cabessa, R. Réalisation de Liaisons par Faisceaux Hertziens de Qualité sur les Trajets Maritimes en Grèce. *L'onde Electrique 35*, 714 (1955).
24. Gudmandsen, P., Larsen, B. F. Statistical Data for Microwave Propagation Measurements on Two Oversea Paths in Denmark. Acta Polytech. No. 213 (1957)
25. Bateman, R. Elimination of Interference Type Fading at Microwave Frequencies with Spaced Antennas. *Proc. Inst. Radio Engrs. 34*, 662 (1946).
26. Andrieux, G. Réflecteurs Passifs pour Faisceaux Hertziens. *L'Onde Electrique 36*, 57 (1956).
27. Chaux, R., Dascotte, J. Les Relais Passifs de la Liaison Afourer-Bin-el-Ouidane. *Ann. Radioélectricité 5*, 220 (1950).
28. Magnuski, H., Koch, T. F. Passive Repeater Bends Microwave Beam. *Electronics 26*, 134 (Feb. 1953).
29. Bussey, H. E. Suppressing Microwaves by Zonal Screens. *Tele-Tech. 10*, 45 (Dec. 1951).
30. Ryde, J. W. The Attenuation and Radar Echoes Produced at Centimetre Wave-Lengths by Various Meteorological Phenomena. *Phys. Soc. and Royal Met. Soc. Report of a Conference on Meteorological Factors in Radio-Wave Propagation*, p. 169 (1946).
31. Millington, G. The Reflection Coefficient of a Linearly Graded Layer. *Marconi Rev. 12*, 140 (1949).
32. Crawford, A. B., Jakes, W. C. Selective Fading of Microwaves. *Bell Syst. Tech. J. 31*, 68 (1952).
33. Rivet, P. Essais de Diversité et Etude de L'Effet de Focalisation sur les Liaisons Longues en Visibilité. *L'Onde Electrique 36*, 24 (1956).
34. Essen, L. A Highly Stable Microwave Oscillator and Its Application to the Measurement of the Spatial Variations of Refractive Index in the Atmosphere. *Proc. Instn. Elect. Engrs. 100*, Pt. 3, 19 (1953).
35. Bussey, H. E., Birnbaum, G. Measurements of Variations in Atmospheric Refractive Index with an Airborne Microwave Refractometer. *J. Res. Nat. Bur. Stand., Wash. 51*, 171 (1953).
36. De Lange, O. E. Propagation Studies at Microwave Frequencies by Means of Very Short Pulses. *Bell Syst. Tech. J. 31*, 91 (1952).
37. Kaylor, R. L. A Statistical Study of Selective Fading of Super-High-Frequency Radio Signals. *Bell Syst. Tech. J. 32*, 1187 (1953).
38. Bean, B. R. Prolonged Space-Wave Fadeouts at 1046 MC Observed in Cheyenne Mountain Propagation Program. *Proc. Inst. Radio Engrs. 42*, 848 (1954).
39. Millar, J. Z., Byam, L. A. A Microwave Propagation Test. *Proc Inst. Radio Engrs. 38*, 619 (1950).
40. Vecchiacchi, F. Prove di Propagazione con le Frequenza di 1000 MHz su Vari Percorsi. *Alta Frequenza 25*, 100 (1956).
41. Carassa, F. Prove di Propagazione con le Frequenze di 250, 500, 1000 MHz. *Alta Frequenza 25*, 378 (1956).
42. Misme, P. Fadings d'Interférences Causés par des Discontinuités Frontales. *L'Onde Electrique 36*, 43 (1956).
43. Klein, W. Wave Propagation Studies in the Alps, over 15-cm, 90-cm, and 2-m Wave Radio Relays. *Brown Boveri Rev. 36*, 387 (1949).
44. Gough, M. W. Some Features of V.H.F. Tropospheric Propagation. *Proc. Instn. Elect. Engrs. 102B*, 43 (1955).
45. Jelonek, Z., Fitch, E., Chalk, J. H. H. Diversity Reception. *Wireless Engr. 24*, 54 (1947).

Tropospheric Scatter Propagation

By G. Millington*, M.A., B.Sc., M.I.E.E.

The physical mechanisms of long-distance propagation are reviewed with special reference to forward scattering. Recent research in the United Kingdom is described on the nature of the signal variations and their relation to meteorological conditions. The use of scatter links for wide-band systems is discussed, including the problems of aircraft reflections and mutual interference due to frequency sharing.

THIS article is a companion to the preceding one by M. W. Gough on 'Microwave line-of-sight propagation'. The opening section of that article forms a general introduction to propagation in the u.h.f. and higher frequency bands and reference should be made to it in connexion with the present article also, particularly with regard to the division of the subject between the two articles.

It may appear that the trans-horizon region in which there is a transition to the diffraction field has been neglected in passing from line-of-sight to scatter propagation, but it should be borne in mind that at the present time there is no general agreement about the physical mechanism of long distance tropospheric propagation. It is interesting to note that at a recent Symposium at the Institution of Electrical Engineers on 'Long-distance propagation above 30Mc/s'[1] the session on ionospheric propagation was entitled 'Ionospheric forward scatter propagation' whereas the sessions on tropospheric propagation were qualified by 'beyond the horizon' without specific reference to forward scatter.

The subject of long distance tropospheric propagation has been intensively studied in recent years from two different points of view, (1) as a disturbing factor limiting the amount of frequency sharing that can be achieved in relatively short-distance applications such as optical relay links and television broadcasting, and (2) as a method of establishing long-distance communication links of several hundred miles by using large powers and high-gain aerials. The literature is already extensive and only a few selected references to survey papers and conference proceedings will be given here[2,3,4,5] which themselves contain useful bibliographies.

No attempt will be made to give a detailed review of all this work. Instead, the aim will be to assess the present position with regard to the successful development of tropospheric scatter links for long-distance communication on a world-wide basis. In the U.S.A. work has gone ahead on the establishment of operational links, whereas in the United Kingdom attention has so far been largely concentrated on the better understanding of the propagation phenomena involved, as is shown from the papers contributed to the symposium already mentioned[1]. The ionospheric research described at that symposium has revealed that the claims originally made for the general use of forward scatter circuits need careful revision, and it is found that in the tropospheric case also much thought needs to be given to the factors which may control the use of long-distance tropospheric communications at any given time and place.

Factors in Long-distance Tropospheric Propagation

It is well known that the possibility of receiving signals far beyond the horizon on quasi-optical frequencies depends upon the existence of a non-homogeneous atmosphere. It is true that communication can be established over considerable distances by the mechanism of obstacle gain when there is a high mountain ridge between the transmitter and the receiver that is well optical from both terminals[6], but this remarkable phenomenon can only be exploited in certain cases and does not enter into the consideration of long-distance transmission in general. It has also been suggested by Bullington[7] that energy may be conveyed into the diffraction region by scattering from the rough surface of the ground, but though this may be a contributory factor it is probably not a major one.

If the non-homogeneity of the atmosphere had the form of a smooth variation of refractive index in the vertical direction such as a linear variation or one decreasing exponentially from the surface value to unity at great heights, the situation would lead to propagation over the surface of the earth characteristic of that through a homogeneous atmosphere above an earth of modified radius. Under the conditions of a standard atmosphere the effective radius would be the true radius modified by a factor of 4/3. This would give an increased horizon distance, but no major increase of range beyond the horizon.

When there is a large negative gradient of refractive index at the surface of the earth, super-refraction occurs and a radio duct can be formed leading to anomalous propagation in which strong signals can be obtained at great distances. This aspect of long-distance propagation will not be considered in detail here, though it is an important factor, especially in tropical regions, in the disturbance caused for certain small percentages of time to services working on a frequency sharing basis.

It has been maintained by Carroll and Ring[8] that partial reflections at all levels within a smoothly graded atmosphere are of themselves sufficient to explain propagation to long distances, but it appears from their analysis that this conclusion is a result of the model they have used, namely a bi-linear distribution of refractive index in which at a certain height there is a discontinuity in the gradient. At the shallow angles of propagation involved, such a discontinuity can give rise to appreciable reflection and thus profoundly modify the attenuation of the propagation modes in the diffraction region.

This mechanism does, however, draw attention to the general phenomenon of partial reflections from elevated layers in the troposphere where there is a rapid change of refractive index over a small range of height associated with changes in temperature and humidity. It is well known from meteorological soundings by radio-sonde and from refractometer measurements made in aircraft[9] that such layers often occur, and there is now a large body of evidence that the presence of such layers can give rise to long-distance propagation. Under many conditions, partial reflections are a major factor, while some authors[10] even claim that such reflections from high level layers, and in particular from the tropopause, are the sole cause of long-distance tropospheric propagation.

The scattering theory itself is based on the idea that there exists in the troposphere a series of scattering centres

* *Marconi's Wireless Telegraph Co. Ltd.*

or 'blobs' in which the refractive index differs from the mean value for the surroundings. These blobs can scatter energy falling on them in various directions and the polar diagram of the scattered energy depends on the scale size of the 'blob', the wave frequency, the scattering angle between the direction of the incident wave and the scatter direction under consideration, and upon the law of distribution of refractive index assumed.

At the Symposium[1] all these factors affecting long-distance tropospheric propagation came under review and a division of the papers was made into two categories: (1) those dealing with transmissions in which the mechanism was primarily one of reflection from elevated layers, and (2) those in which the propagation was thought to be by forward scattering from 'blobs' formed by turbulence in the atmosphere. The first dealt with the trans-horizon region and with reception at considerable distances for a small percentage of time of high field-strengths capable of causing interference between services sharing the same frequency in well separated areas. The second was concerned mainly with the relatively weak signals receivable continuously at long distances up to several hundred kilometres.

It is interesting to note in retrospect that the first category dealt entirely with transmissions on frequencies below 300Mc/s, i.e. in the v.h.f. range and the second with frequencies above 300Mc/s, i.e. in the u.h.f. and s.h.f. ranges. It is in these higher frequency bands that work is going ahead with the aid of large powers and high-gain aerials to use the weak but continuous signals for long-distance communication by tropospheric propagation. The remainder of this article will be concerned with this aspect of the subject and in particular with the work being carried out in the United Kingdom.

Long-Distance Forward Scatter Propagation

Evidence of the propagation of microwaves well beyond the horizon has been accumulating for more than a quarter of a century and it has been pointed out that Marconi was among the pioneers in studying this part of the radio spectrum[11,12]. It was not, however, until after the development and use of microwave radar that Pekeris[13] in 1947 first put forward the suggestion that a scattering process might be involved. In 1949, Megaw[14] carried out a pioneer experiment establishing beyond doubt that at a certain distance beyond the horizon the exponential decrease of field strength in the diffraction region gives place to a much slower decrease with distance, so that a detectable signal persists out to great distances.

The signals are not constant, in fact it was the nature of the fading to which they are subject that led to the scattering theory which was first worked out in detail by Booker and Gordon[15] and subsequently on a somewhat different basis by Villars and Weisskopf[16] and by Batchelor[17]. Megaw's own independent theoretical work has recently been published posthumously[18]. The subject of turbulence and the formation of eddies is complex and no attempt will be made here to compare the various scattering formulae that have been derived, especially as it is difficult to decide between them from the experimental results. They have, however, been reviewed by Johnson[19] who points out the danger of attributing differences between theory and observation to wrong assumptions about the scattering parameters when there may be the unsuspected presence of radio ducts or elevated inversion layers modifying the propagation process.

The explanation of the observed results in terms of scattering from atmospheric turbulences is based on the condition that the fading of the signals is random in character, though an equivalent effect could be produced by the addition of a number of coherent signal components in random relative phases arising, for example, from partial reflections from a number of discontinuities of limited extent. Actually the signal is often the resultant of a random component and an intermittently coherent component, even at considerable distances and when the field-strength is only of the order associated with the scattering process. Such a signal has been termed 'quasi-scatter'[20,21] and is sometimes revealed in a statistical analysis of a fading record by the departure from a Rayleigh law typical of a random signal. Even at 10 000Mc/s there is evidence that partial reflections may play some part as well as scattering in the propagation mechanism[21]. In analysing records obtained from tropospheric scatter links to determine the characteristics of forward scattering by atmospheric turbulences, care has to be taken to exclude cases where propagation in a radio duct or by partial reflections from elevated layers is revealed by an unusually high signal level.

Recent Work in the United Kingdom

In reviewing the work in progress in the United Kingdom, attention will be mainly directed towards the general results that have been obtained. With the exception of the experiments that have been conducted by the Admiralty[21,22] in which measurements have been made at sea out to ranges as great as 700km, the tests have been made over fixed distances wholly or mainly overland. These distances lie in the range 150km to 400km, and the frequencies in the range 850Mc/s to 3 500Mc/s, apart from one of the Admiralty tests carried out on about 10 000Mc/s.

Although some tests have been made with speech modulation, the transmissions have been on continuous wave to obtain amplitude recordings for studying the various propagation characteristics upon which the successful use of communication circuits depends. These will be dealt with briefly in turn.

Attenuation Loss Relative to the Free-space Signal

In agreement with the scattering theory as applied to the kind of turbulence that is believed to occur in the troposphere, the increase of the attenuation or transmission loss with frequency between 300Mc/s and 3 000Mc/s is not great, though at 10 000Mc/s the effect of atmospheric absorption is becoming important. The frequency dependence is in fact much less severe than in the case of ionospheric forward scatter propagation. In the region beyond the horizon where the permanent scattered signal first predominates over the diffracted signal, it is of the order of 50dB below the free space value, but the attenuation with distance is only 0·1dB/km increasing to 0·2dB/km at 10 000Mc/s.

Even on 300Mc/s at the lower end of the u.h.f. band, the rate of attenuation of the diffracted field under standard atmospheric conditions is 0·65dB/km and the field falls below the level of the scattered signal at about 60km beyond the horizon. At 3 000Mc/s this attenuation rate is 1·4dB/km and the scattered signal takes over from the diffracted field within about 30km of the horizon.

Diurnal and Seasonal Variations

The above figures for the scattered field are of course approximate as they are subject to diurnal and seasonal variations. In broad terms the signals are greater by night than by day with an overall variation of the order of 10dB, while they are from 5 to 10dB weaker in the winter months than in the summer. These conclusions depend somewhat upon the method of averaging, according, for instance, to whether daily or hourly median values are taken, and upon the way in which allowance is made for non-standard con-

ditions typified by ducting or the presence of inversion layers.

These conditions are more likely to occur by night than by day and may have an influence on the night-time estimates. There is some evidence that the signal is most likely to be a purely scattered one in the early afternoon with the suggestion that the seasonal variation should be based on measurements made between 1 200 to 1 400 hours[23].

Fading Characteristics

An indication that the signal is effectively a scattered one is obtained when the fading is rapid and the amplitude exhibits a Rayleigh distribution. Under these conditions a typical fading rate is one per second between limits of ±10dB relative to the median value. This fast fading is sometimes superimposed on a more slowly varying signal with a rate of only a few per minute but with a fading depth of 20dB or more, implying the presence of another mechanism of propagation.

The Rayleigh distribution strictly refers to measurements made over a short interval of time. Variations in the troposphere which cause changes in the scattering coefficient associated with the turbulences make the distribution measured over longer intervals tend towards the log-normal type. A modified Rayleigh distribution has been found in those cases where a coherent mode of propagation is presumed to be present under quasi-scatter conditions[21,24].

Beam Setting Requirements

Tests have been carried out to find the optimum aerial arrangements with regard to beam gain and setting. On the basis of a presumed scattering mechanism, theory indicates that at the scattering source the angle between the direction from the transmitter and the direction to the receiver should be kept as small as possible. For an assumed height of the source this scattering angle is least for the mid-way point in the great-circle plane through the transmitter and receiver.

It is in fact found necessary to keep the angle to a minimum by directing the beams at the horizon. It is therefore important to choose a site with an unobstructed horizon and indeed it is beneficial to use high terminals where possible and to direct the beams downwards to the horizon. Measurements show that even on 860Mc/s at a distance of 160km the received signal drops by about 14dB if the transmitting and receiving beams are elevated together by as little as 3°.

In the horizontal plane over the same circuit the signal dropped by 15dB when the beams were moved together through 3° from the great-circle plane. In such a case the drop in signal may not be solely due to the consequent increase in the scattering angle, but also to the failure of the beams to intersect at a sufficiently low level in the troposphere. It appears in fact that with increasing height the intrinsic scattering coefficient decreases quite apart from the value of the scattering angle. There is thus a limited scattering volume which is effective in conveying the signal from a transmitter to a receiver at a given distance.

It is thus essential to use a beam that is as narrow as possible in the vertical plane and narrow enough in the horizontal plane to lie inside the relevant scattering volume. On the other hand the experiments show that it is desirable to illuminate the whole of the scattering volume, and that if the horizontal polar diagram is narrowed further than is necessary the extra gain of the aerial on a plane wave basis is not achieved.

Polarization Characteristics

Tests carried out[23] on about 860Mc/s at distances of 160 and 320km have shown that the polarization of the signals received by forward scatter propagation is preserved to a high degree independently of the initial state of polarization launched by the transmitting aerial. Records taken on receivers with the correct and crossed polarization consistently showed a difference of 30dB or more, the suppressed signal often being among noise.

It appears that the transmission characteristics do not depend upon the state of polarization which is substantially maintained over a scatter link. This fact precludes any use of polarization diversity such as can be used in long distance high-frequency communication by normal reflection from the ionosphere due to the anisotropic nature of the medium in that case[25].

Height-gain Relations

In ground-wave propagation under standard atmospheric conditions over smooth terrain there exists over the wavefront at the receiving point a coherent amplitude and phase relationship. As a result there is a definite height-gain function determined by the superposition of an incident and reflected wave system above the surface of the earth. With a signal consisting of a number of randomly related components arriving over a small cone of angles from the scattering volume, the interference pattern above the earth should be blurred and variable with time. However, depending upon the measure of incoherence across the wavefront, some vestige of a height-gain relationship may exist near to the ground.

Height-gain measurements were made on the 320km link on 860Mc/s already mentioned[23]. A well defined interference pattern was obtained up to a height of 10m, but at greater heights the maxima and minima decayed and showed little coherence between successive tests. The difference between the maxima and minima was only of the order of 3dB, and there was no sign of the large height-gains that would be exhibited by a purely diffracted signal, indicating the entirely different mechanism by which the energy reaches the receiver at large distances beyond the horizon.

The effect is thus of little practical interest especially as the dimensions of a high-gain aerial system such as a large parabolic dish are great compared with the scale of the interference pattern. Such tests, however, may give some indication of the scale of the incoherence across the incident wavefront and of the position of the scattering source.

On the other hand, as has already been pointed out, there may be some advantage in placing a terminal at a considerable height, e.g. on a convenient hill-top, where the horizon direction may lie appreciably below the horizontal plane through the aerial.

Diversity Measurements

It is well known that the troubles caused by fading in long-distance radio communication can be alleviated by the use of some form of diversity reception. It has already been seen that no use can be made of polarization diversity at a given point, but frequency and space diversity can be employed with advantage. So far no tests have been carried out in the United Kingdom on frequency diversity, but correlation measurements have been made on signals received on aerials spaced both vertically and horizontally.

Preliminary tests on 3 500Mc/s show that at times the vertical spacing has to be increased to 25 wavelengths before the correlation coefficient drops to zero, and that the figure is somewhat greater for horizontal spacing. On 860Mc/s respective figures of 35 and 55 wavelengths have been obtained for a correlation coefficient of 0·2.

The figures are very variable, depending upon the chang-

ing characteristics of the troposphere. They indicate, however, that it may be advisable to use a spacing as large as 100 wavelengths if the full benefit of this type of diversity reception is to be obtained.

Aircraft Effects

In the development of tropospheric scatter circuits for long distance communications, it has been realized from the start that reflections from aircraft, which are the basis of their detection by radar, would cause interference. Special observations have been made in the 860Mc/s and 3 500Mc/s tests of the aircraft effects which appear on a continuous wave transmission as a sinusoidal oscillation on the record caused by the characteristic Doppler beat between the wanted scatter signal and the signal changed in frequency by reflection from the moving aircraft.

In view of the large number of aircraft in flight over the United Kingdom, it is difficult to identify a given interference effect with a particular aircraft, except in some of the cases when the aircraft is in sight and its movement in relation to the path of the tropospheric link can be observed. The problem of the reflection received from an aircraft in relation to its position in the scattered field set up by the transmitter is complex, but it can be shown that the signal is strongest when the aircraft is near to either terminal.

On both frequencies this was found to be the case with respect to the receiving terminal and under such conditions the signal can be comparable with the wanted scatter signal. Although the phenomenon should be reciprocal, attempts to correlate interference effects at the receiver with the presence of aircraft in the vicinity of the transmitter on 860Mc/s had no success. It was, however, found during siting tests that when the receiver was unfavourably placed with the horizon obstructed by rising ground, the aircraft signals could overwhelm the wanted signal.

Meteorological Factors

As the mechanism of long-distance tropospheric propagation is essentially bound up with the physical properties of the lower atmosphere, it must obviously depend upon the meteorological situation typified by the weather existing along the transmission path. The diurnal and seasonal variations in the received signal must in some way be associated with changing atmospheric conditions. Attempts have therefore been made to correlate weather data obtained from the nearest meteorological stations with the signal variations.

It is, however, difficult to assess the true situation along the path from measurements taken intermittently at isolated points which are not actually on the path or near the mid-point, so that correlations with hourly median values are in general impracticable. The making of a continuous and detailed study of the refractive index all along the path is a formidable task that has not yet been attempted in the United Kingdom, and some of the difficulties involved may be appreciated by reference to an elaborate project carried out in New Zealand some years ago[26]. However, the development of a sensitive and quick-acting refractometer for use in an aircraft is a step towards this end.

The information obtainable from such a meteorological survey is, moreover, more likely to be concerned with the existence of refractive index gradients and sharp inversion layers that give rise to periods of propagation by ducting and by partial reflections when the signal is strong compared with the normal scattered signal under consideration. Even so, attempts to correlate such occasions with specific weather conditions have been largely inconclusive apart from general trends established on a long term basis[27].

The most that has been done in the United Kingdom tests is to show that there is a significant correlation between the mean refractive index gradient and the median signal strength[23,24], the presumed explanation being that with an increase in the gradient there is an increased curvature of the ray paths from the transmitter to the scattering volume and from the latter to the receiver, leading to a decrease in the associated scattering angle and hence to an increase in the received signal.

A significant correlation has also been claimed between wind velocity measurements and the movements of the scattering centres across the transmission path as deduced from time delays between the amplitude records made on two aerials spaced horizontally transverse to the path[23].

The experiments all agree that the signal is enhanced during fog or mist, though on the highest frequencies dense fog causes a reduction in signal due to atmospheric absorption. Heavy rain or snow can likewise depress the signal considerably over the whole frequency band, the attenuation being of the order of 0·06dB/km at a frequency of 3 500Mc/s. Under anticyclonic conditions the signal on 3 500Mc/s tends to be below average, while on lower frequencies the fading is often deeper and slower than during the well mixed atmospheric conditions associated with cyclonic weather.

It is not clear to what extent these observations imply a connexion between the weather and the nature of the turbulences responsible for the scattered signal. It appears that some degree of stratification may assist the scattering process, but such a conclusion is difficult to establish because of the effect of such stratification on the signal by the formation of ducts and partially reflecting layers.

Conclusions

The experimental results and the difficulty of relating them precisely to the meteorological conditions emphasize the complexity of the problem under consideration. In the Introduction it was stated that there is no general agreement about the physical mechanism of long distance tropospheric propagation and this is exemplified by the fact that for much of the time the process is not one of pure scattering typified by a Rayleigh distribution of signal amplitude. Changing weather conditions often imply the presence of some measure of layer or duct formation, and where the reflecting layers may not be continuous over a large area but broken up into a number of reflectors of limited extent, the signal may be the resultant of a number of partial reflections in random relationship and similar in characteristic to scattering from turbulences.

When such reflecting areas become comparable with the size of the scattering centres, there is experimentally no clear cut distinction between the two mechanisms. This is equivalent to saying that the fundamental physical process is one of scattering and that reflection from a plane surface of sufficient extent represents a limiting condition in which the scattering is completely coherent. While the theoretical study of the formation of turbulent eddies is of great importance and the statistical analysis of scattering on certain idealized assumptions has led to a knowledge of the general form of the laws of scattering, it is doubtful whether it is fruitful to pursue this line of approach in great detail in the attempt to explain the experimental results.

The tests have shown the need to establish the propagation characteristics by experimental observation, the

theory acting as a general guide in the interpretation of the records. The United Kingdom results in general fall into line with those found in the U.S.A. and in northern Europe insofar as the average meteorological conditions are similar. There is plenty of evidence that in tropical regions, especially in the desert regions of the Middle East, the mechanisms of partial reflection and ducting can play a dominating part at some seasons of the year, giving rise to very strong signals for hours at a time.

As far as is known, no really long distance u.h.f. tropospheric link has been established in the United Kingdom on an operational basis. Steps are now being taken to engineer such a circuit that can be modulated for traffic and pulse transmissions to implement the findings of the experimental links. Preliminary tests with speech modulation over the experimental links have shown promising results, though it must be remembered that in the case of this type of intelligence the ear and mind are tolerant to momentary breaks due to fading that would be unacceptable with some other modulation systems.

On the other hand these tests were carried out without the use of diversity reception and with lower transmitted power than would be employed in a fully engineered circuit. Tests must be made with such a circuit making full use of diversity reception before it is possible to pronounce with complete confidence on the operational performance of tropospheric links for any projected service. In particular, such tests are needed to study with the aid of pulses the problem of time delays in relation to multi-channel working and television relaying.

These time delays are known to be much shorter with tropospheric than with ionospheric forward scatter propagation because of the much lower level at which the scattering occurs and of the small volume of the medium involved, but troubles may occur at times of abnormal propagation when the mechanism ceases to be solely one of scattering. The problem of available bandwidth is a complex one, but some discussion of it has been given in a recent paper by Saxton[28] who concludes that the prospects for television relaying are promising. Although some claims have already been made in this direction[29], it is not proven that the mechanism was truly that of tropospheric scattering, and as far as is known, no long term performance tests have yet been carried out to substantiate the possibility of, for example, bridging the Atlantic by a chain of long-distance tropospheric television links.

There are obvious reasons for employing this mode of propagation for military purposes, especially across inaccessible intervening terrain, even if the performance is not as perfect as would be demanded of a commercial installation. The problem of using such a link in preference to a chain of line-of-sight relays where the latter is practicable in an economic as well as a technical one, and as such is outside the scope of this article.

As in many other applications of radio, some measure of disturbance must be expected which has to be tolerated, provided it can be kept within acceptable limits. Mention has been made of aircraft effects. Although a large measure of protection will be obtained by the use of highly directive aerials, it obviously cannot be entirely eliminated in regions of high air-traffic density. Where the type of modulation permits, use can be made of error detection and correction methods, but these would presumably not apply for television where storage techniques are difficult to envisage.

Finally it may be pointed out that the use of this new mode of propagation raises further problems of frequency allocation and sharing. It is worth noting that in international circles this aspect of the problem is already coming under review and attention is being drawn to possible interference problems under conditions of abnormal propagation in view of the large powers that will be used. It is well known that serious difficulties have been met in the case of ionospheric scatter propagation which are requiring special measures to overcome them. It is important that in the case of tropospheric propagation such difficulties should be anticipated as far as possible in the preliminary research survey along the lines that have been discussed in this article.

Acknowledgments

The author wishes to thank the Engineer-in-Chief, Marconi's Wireless Telegraphy Company Limited for permission to publish this article.

REFERENCES

In the following list of references, the description 'Symposium Paper' refers to the Symposium in reference 1.

1. Symposium on 'Long-distance propagation above 30Mc/s' held at the Institution of Electrical Engineers on 28th January, 1958. To be published in Vol. 105B of the Proceedings.
2. SAXTON, J. A. The Propagation of Metre Radio Waves Beyond the Normal Horizon. *Proc. Inst. Elect. Engrs. 98*, Pt. 3, 360 (1951).
3. Colloque International sur la Propagation. (Paris-September, 1956). *L'Onde Electrique. 37*, 411 (1957).
4. Les Problemes d'actualite dans la Propagation des Ondes Radioelectriques (Colloque International. Paris 17-21, September, 1956) *Ann. Telecommun. 12*, 140 (1957).
5. STARAS, H. Forward Scattering of Radio Waves by Anisotropic Turbulence. Scatter Propagation Issue. *Proc. Inst. Radio Engrs. 43*, 1174 (1955).
6. DICKSON, F. H., EGLI, J. J., HERBSTREIT, J. W., WICKIZER, G. S. Large Reductions of v.h.f. Transmission Loss and Fading by the Presence of a Mountain Obstacle in Beyond-Line-of-Sight Paths. *Proc. Inst. Radio Engrs. 41*, 967 (1953).
7. CARROLL, T. J. Normal Tropospheric Propagation Deep into the Earth's Shadow: the Present Status of Suggested Explanations. *Trans. Inst. Radio Engrs. PGAP-3*, 6 (1952).
8. CARROLL, T. J., RING, R. M. Propagation of Short Radio Waves in a Normally Stratified Troposphere. *Proc. Inst. Radio Engrs. 43*, 1384 (1955).
9. GRAIN, C. M. Survey of Airborne Microwave Refractometer Measurements. *Proc. Inst. Radio Engrs. 43*, 1405 (1955).
10. STARKEY, B. J., TURNER, W. R., BADCOE, S. R., KITCHEN, G. F. The Effects of Atmospheric Discontinuity Layers Up To and Including the Tropopause on Beyond-the-Horizon Propagation Phenomena. Symposium Paper No. 2486R.
11. CARROLL, T. G. Marconi's Last Paper, On the Propagation of Micro-Waves over Considerable Distances. *Proc. Inst. Radio Engrs. 44*, 1056 (1956).
12. ISTED, G. A. Guglielmo Marconi and Communication Beyond the Horizon: A Short Historical Note. Symposium Paper No. 2479R.
13. PEKERIS, C. L. Wave Theoretical Interpretation of Propagation of 10cm and 3cm Waves in Low-Level Ocean Ducts. *Proc. Inst. Radio Engrs. 35*, 453 (1947).
14. MEGAW, E. C. S. Scattering of Electromagnetic Waves by Atmospheric Turbulence. *Nature, Lond. 166*, 1100 (1950).
15. BOOKER, H. G., GORDAN, W. E. A Theory of Radio Scattering in the Troposphere. *Proc. Inst. Radio Engrs. 38*, 401 (1950).
16. VILLARS, F., WEISSKOPF, V. F. The Scattering of Electromagnetic Waves by Turbulent Atmospheric Fluctuations. *Phys. Rev. 94*, 232 (1954).
17. BATCHELOR, G. K. The Scattering of Radio Waves in the Atmosphere by Turbulent Fluctuations in Refractive Index. Research Report No. EE 262, School of Electrical Engineering, Cornell University (1955).
18. MEGAW, E. C. S. Fundamental Radio Scatter Propagation Theory. *Proc. Inst. Elect. Engrs. Monogr. 236R*, 15 (May, 1957).
19. JOHNSON, M. A. A Review of Tropospheric Scatter Propagation Theory and its Application to Experiment. Symposium Paper No. 2534R.
20. KITCHEN, F. A., RICHARDS, E. G., RICHMOND, I. J. Some Investigations of Metre-Wave Radio Propagation in the Trans-Horizon Region. Symposium Paper No. 2509R.
21. JOY, W. R. R. Radio Propagation Far Beyond the Horizon at about 3.2cm Wavelength. Symposium Paper No. 2538R.
22. JOY, W. R. R. The Long-Range Propagation of Radio Waves at 10cm Wavelength. Symposium Paper No. 2522R.
23. RIDER, G. C. Some Tropospheric Scatter Propagation Measurements and Tests of Aerial Siting Conditions at 858Mc/s. Symposium Paper No. 2528R.
24. ANGELL, B. C., FOOT, J. B. L., LUCAS, W. J., THOMPSON, G. T. Propagation Measurements at 3480Mc/s over a 173-Mile Path. Symposium Paper No. 2510R.
25. GRISDALE, G. L., MORRIS, J. G., PALMER, D. S. Fading of Long-Distance Radio Signals and a Comparison of Space and Polarization-Diversity Reception in the 6-18Mc/s Range. *Proc. Inst. Elect. Engrs. 104B*, 39 (1957).
26. MILNES, B., UNWIN, R. S. A Radio-Meteorological Investigation in the South Island of New Zealand. *Proc. Phys. Soc. Lond. 63B*, 595 (1950).
27. SPENCER, C. W. Radio-Wave Propagation at 89Mc/sec in Relation to Synoptic Conditions. *Met. Mag. 81*, 206 (1952).
28. SAXTON, J. A. Scatter Propagation and its Application to Television. *J. Televis. Soc. 8*, 1 (1957).
29. TIDD, W. H. Demonstration of Bandwidth Capabilities of Beyond-Horizon Tropospheric Radio Propagation. *Proc. Instn. Radio Engrs. 43*, 1297 (1955).

MICROWAVE LINK DEVELOPMENT in the Radio Laboratories of the Post Office Engineering Department

By C. F. Floyd*, M.A., A.M.I.E.E. and R. W. White*, B.Sc., F.Inst.P., A.M.I.E.E.

The contribution made by the Radio Branch Laboratories of the Post Office to broad-band microwave system development is surveyed. Their work includes the design and installation of complete point-to-point 4 000Mc/s television and multi-channel telephony systems and associated test equipment.

THE British Post Office has had a close interest in the development of point-to-point radio circuits since the earliest days of radio communication, and its Radio Development Laboratories at Dollis Hill and elsewhere are concerned with research and development on new systems and with the investigation of new measuring and testing techniques.

The development of modern broad-band links owes much to earlier work on v.h.f. links before and during the war[1-6]. The last two decades have seen a rapid growth of interest throughout the world in microwave radio systems for multi-channel telephony or point-to-point television distribution. Many laboratories have made important contributions to the art and the pioneering work of the Bell Laboratories in America has been of fundamental importance. Significant contributions have also come from the laboratories of several British firms. This article is, however, restricted to a survey of some of the work of the Post Office Radio Laboratories; limitations of space preclude much detail, and for further information reference should be made to the extensive bibliography.

Microwave Systems

In 1946 a one-way experimental television link operating at approximately 200Mc/s was established from London to Castleton, near Cardiff[7], and pictures were successfully transmitted over it in March, 1949. This experimental link was one of the first to use frequency modulation for the transmission of television signals and it provided much valuable information on the problems involved in the use of this form of modulation. Subsequently three hops of this link were converted to 4 000Mc/s operation and in 1952 the composite link shown in Fig. 1 was used to provide a temporary service to the BBC Wenvoe transmitter pending completion of the permanent coaxial cable link from London.

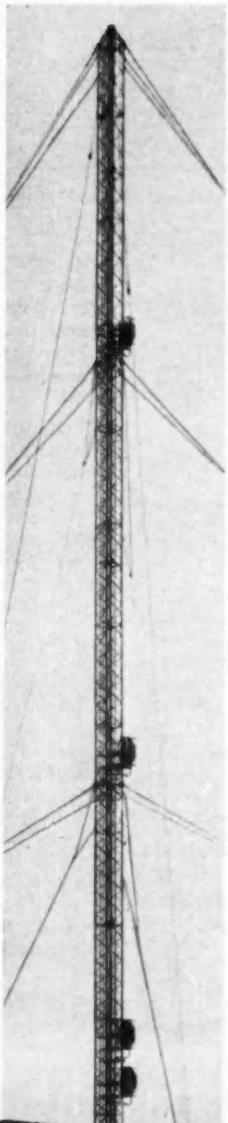

The photograph shows the buildings and aerials at the southern terminal of the Elgin-Wick link.

The Elgin-Wick Multi-Channel Telephony System

After the successful demonstration of broad-band transmission over the London-Castleton radio link, the development of a single-hop frequency-modulation telephony system on a 55-mile long oversea path across the Moray Firth was undertaken[8,9]. This link was required to carry 240 channels and, so far as it was possible on such a long hop, had to meet C.C.I. standards.

The likelihood of multi-path propagation and fading, made space diversity reception essential. Preliminary propagation tests also showed that frequency selective fading was to be expected, and this led to the provision of frequency diversity in addition to space diversity. The use of frequency diversity was acceptable in view of the isolated location of the link. However, in locations where pressure on available frequency space is acute, the use of frequency diversity may not be acceptable. The Elgin-Wick link is, in effect, a quadruple diversity system, with the general arrangement shown in Fig. 2. As complete transmitters and receivers are provided for each frequency, there is no need for standby equipment.

Of the three methods of diversity switching:

(a) At microwave frequency at the receiver input.

(b) At intermediate frequency, 60Mc/s.

(c) At base-band.

intermediate frequency switching (b) was the most attractive at that time.

It was chosen for the spaced aerial diversity, the aerial giving the higher output being

* *Radio Laboratories of the Post Office Engineering Research Station*

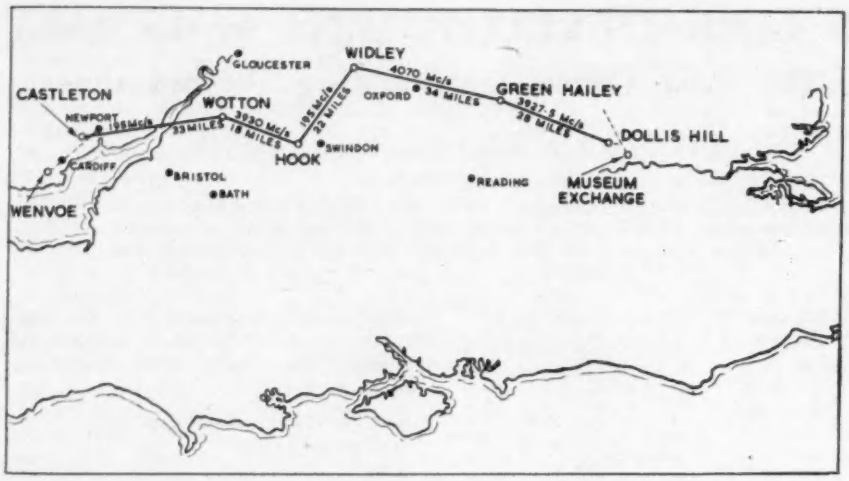

Fig. 1. The route of the Dollis Hill to Castleton broadband television radio link

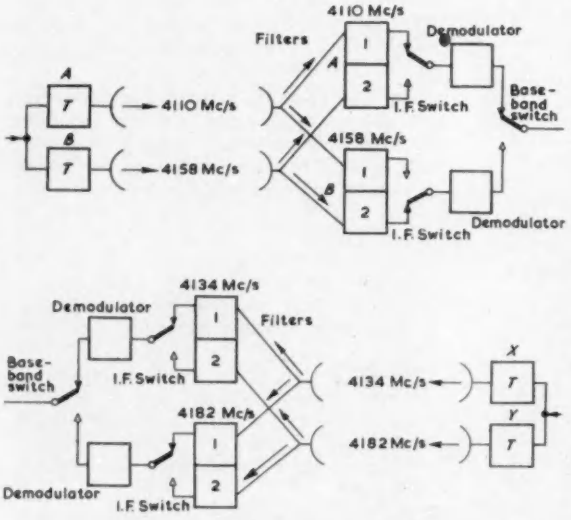

Fig. 2. Simplified block schematic of radio equipment

selected by the diversity switch. The changeover time of this switch is less than 0·3μsec and the time required for the selecting circuit to decide that a changeover is needed is about 3msec. The switch is required to be most sensitive under deep fade conditions, i.e. when diversity improvement is most needed, and the equipment is adjusted so that a 2dB level difference causes changeover from one aerial circuit to the other. For normal reception levels, i.e. in the absence of deep fading, the margin becomes 5dB.

The two broad-band channels providing frequency diversity are independent as far as the final demodulator output (i.e. to base-band) and at this point, a fast-operating relay selects the output with the lower basic noise. The noise is continuously monitored in a narrow pilot channel selected near the top of the base-band; the diversity switch selects the radio channel with the better signal-to-noise ratio. The circuit interruption arising from a changeover is less than 5msec, which is short enough to prevent appreciable interference to traffic.

The optimum heights for the four dish aerials—two transmitting and two receiving at each end of the link—were determined by experiment. The mast at the southern terminal is shown on page 253; the two transmitting dishes are mounted low down and the space diversity receiving aerials are at widely different heights higher up the mast. It was found desirable to restrict the heights of the dishes to minimise the effects of reflected rays, so as to give the optimum space diversity action.

The transmitter, Fig. 3, gives an output power of 1W into the waveguide feeder. The base-band signals, comprising 240 telephone channels in the range of 60 to 1 052kc/s plus a sub-carrier band for the supervisory and speaker circuits, frequency modulate a 60Mc/s i.f. carrier: the resulting signal in the range 55 to 65Mc/s, phase modulates the 4 000Mc/s carrier in a travelling-wave amplifier[10]. One sideband is selected by a waveguide filter and amplified to 1W by a second travelling-wave amplifier before transmission to the aerial. The intermediate frequency of 60Mc/s was in use here before the C.C.I.R. had adopted the value of 70Mc/s as a standard.

Fig. 3. Block schematic diagram of transmitter

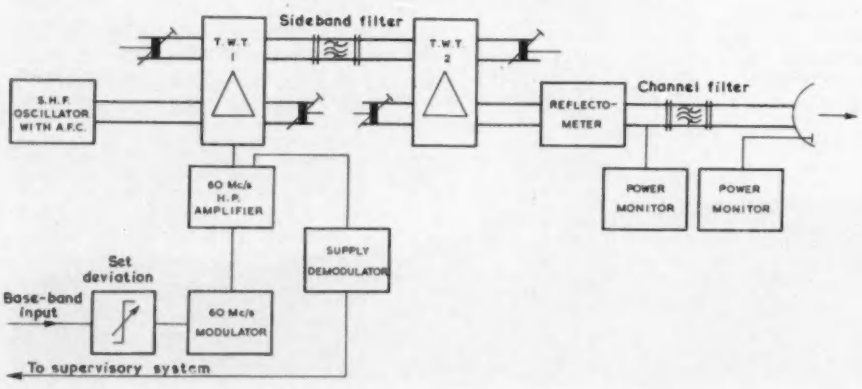

The microwave receiver, Fig. 4, is a superheterodyne without any r.f. stage. The signal is selected by a waveguide filter and mixed in a crystal frequency changer with a local oscillator output to give a difference frequency centred on 60Mc/s; this is amplified, automatic gain control keeps the level constant, and, after the i.f. diversity switch, a demodulator extracts the

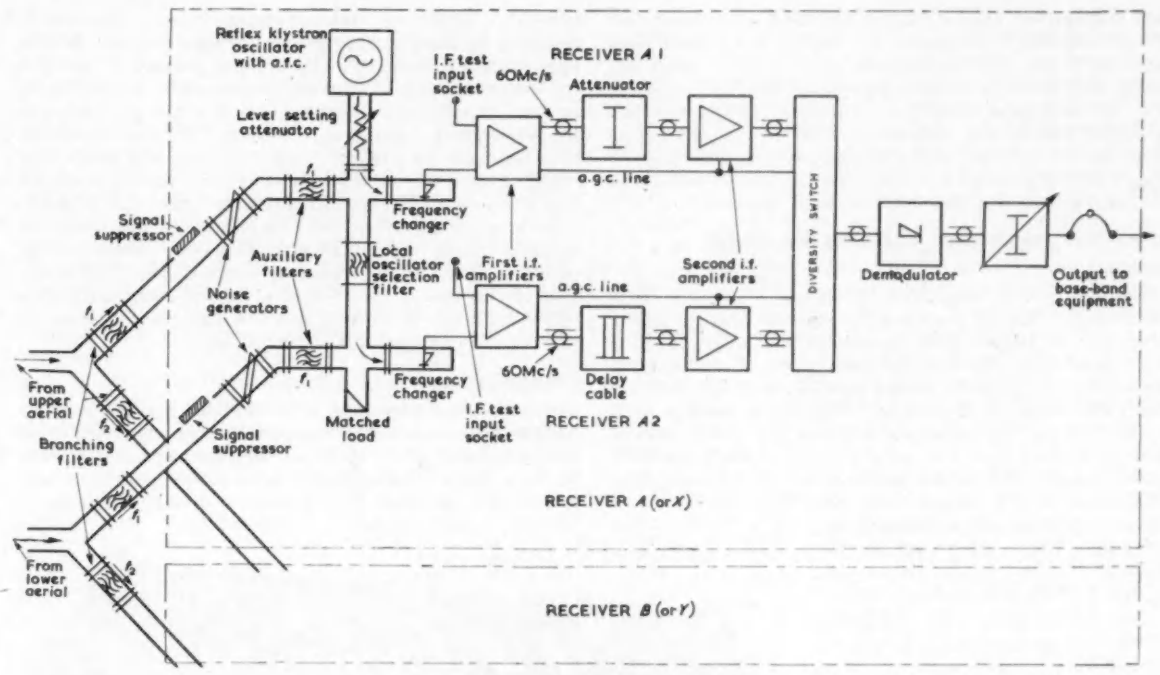

Fig. 4. Block schematic diagram of receiver

base-band signal. The sub-base-band, with supervisory channels and speaker circuits, is separated by filters, leaving the 240 channel band, 60 to 1 052kc/s.

However good the transmission characteristics of a radio link may be, its performance is assessed by reliability and ease of maintenance; the supervisory system is therefore of great importance. The supervisory system[9] uses where possible standard types of equipment as employed on co-axial cable systems. Separate audio frequency tones, drawn from the v.f. telegraph series with 120c/s separation, carry each of the various supervisory indications required. Two speaker circuits are also included. All these audio channels are combined and translated into the band 32 to 48kc/s which is then added as a sub-base-band to the 240-channel base-band, 60 to 1 052kc/s, making a total band of 32 to 1 052kc/s.

The link was opened to traffic in September, 1957. Typical average performance figures under non-fading conditions measured with the white-noise intermodulation test equipment, which will be described later in this article, are given in Table 1. These values are, of course, measured in this type of test as noise power ratios, but they have been converted in Table 1 to signal-to-noise ratios by adding the conversion factor, 18·7dB.

As an indication of the fading experienced on this Elgin-Wick path, fades exceeding 20dB below the steady propagation condition existed for 0·3 per cent of the total time when measured on one aerial. Using two aerials in switched space diversity, no fades exceeding 13dB were recorded, and 10dB fades lasted only 0·05 per cent of the total time. These values are representative of mid-winter conditions.

TABLE 1

Signal-to-noise ratios on the Elgin-Wick radio link

	Signal/Noise Ratio with 240 Channel Loading			Basic Signal/Noise Ratio at 1 002kc/s
Frequency ..	70kc/s	534kc/s	1 002kc/s	
Elgin to Wick	78dB	69dB	68dB	72dB
Wick to Elgin	78dB	74dB	69dB	72dB

The London-Isle of Wight Television Transmission System

The London-Isle of Wight system is a two-hop link designed by the Laboratories for the transmission of television signals; it was opened for service in October 1954. Initially, it used a direct pick-up receiver at Alton and a single-hop, 40 mile, 4 000Mc/s link from Alton to Rowridge on the Isle of Wight[11], but later the direct pick-up receiver at Alton was replaced by a 4 000Mc/s hop from a transmitter on the roof of Museum Telephone Exchange. Diversity working is not used, but a standby channel is provided.

The video signal at the Museum terminal frequency-modulates a 60Mc/s i.f. carrier; the broad-band signal from the i.f. amplifier is then translated to the 4 000Mc/s band and this signal is radiated from a 10ft diameter paraboloid dish. A two-way branching filter is needed to couple the two transmitters that provide the alternative channels to the transmitting feeder and aerial. The subsequent installation of a third 'go' channel has entailed the use of an additional branching filter. A 'return' channel, which is also now operating, uses separate dish aerials. Under normal conditions the basic signal-to-noise ratio on the link is about 50dB which gives a useful, though not excessive, margin against fading. The signal-to-noise ratio is here defined as the ratio of the peak-to-peak picture signal (excluding synchronizing signals) to the r.m.s. noise.

Recent Development Work on Microwave Systems

Progress in the design of microwave systems continues; for example, travelling-wave tubes have improved since the completion of the Elgin-Wick system and low-noise

and high-power (10W) output travelling-wave tubes are now available. Similarly, i.f. modulators, filters and equalizers for these wideband systems have improved. Such diverse items of new equipment must be tested in the field and as a system; a laboratory test cannot meet all these needs. An experimental 4 000Mc/s installation has been set up over a 33-mile path for the field trial of improved components and for the investigation of systems of greater capacity than 600 telephone channels.

Broadband Intermediate Frequency Equipment

Amplifiers

During 1950-1 three types of 60Mc/s amplifier were developed. One of their notable features was the extensive use of single-tuned circuits as interstage coupling networks, with negative feedback applied across alternate valves to provide a band-pass characteristic substantially flat from 55 to 65Mc/s. The three designs were, respectively, a low-noise pre-amplifier for direct association with the mixer unit of a receiver, a main amplifier providing the bulk of the gain and a high level amplifier used to feed a travelling wave tube operating as a convertor from i.f. to microwave frequency[10]. They were used in the London-Castleton experiments and in the London-Isle of Wight link.

The i.f. amplifiers for the Elgin-Wick link[8], developed during 1953-4, resembled the earlier units by being centred on 60Mc/s and by making considerable use of single-tuned circuits plus negative feedback; but they were of different mechanical design, used wired-in valves of the flying lead type and had a much improved electrical performance—particularly in group delay characteristic. They were designed to meet C.C.I.R. overall transmission standards for either 240-channel telephony or 405-line monochrome television.

All the 60Mc/s units were designed before C.C.I.R. agreement had been reached on the choice of i.f., but more recent designs of i.f. amplifier have been centred on 70Mc/s—the current C.C.I.R. standard. A typical five-stage amplifier recently described by Hamer and Gibbs[12] provides 50dB gain over an almost flat pass-band of approximately 50 to 90Mc/s, and over the central 12Mc/s (i.e. 70±6Mc/s) the group delay is constant to within 1mμsec.

Frequency Modulators

In early v.h.f. work, several forms of reactor-valve frequency-modulated oscillator were used; but the maximum deviation available with adequate linearity, and without excessive amplitude modulation, was restricted to one or two per cent of the oscillator mean frequency.

Klystrons can be used as sources of microwave frequency modulated signals, but there are operational advantages in having a modulator unit whose output is at intermediate frequency rather than at the microwave carrier frequency. A method commonly used in U.S.A. is to beat together two klystrons with frequencies separated by the i.f., and to apply the modulating signal to one of the klystrons. This arrangement has also been used by the Post Office Laboratories for test equipment.

During 1950-1 a simple and convenient form of i.f. modulator was developed from the well-known ladder network type of resistance-capacitance phase-shift oscillator by using earthed-grid triode valves as the variable impedance elements[13,14]. This type of frequency modulator has proved suitable for 405 line monochrome television or for 240 telephone channels; but it is not good enough for 600 channel operation. During 1955 two important improvements were made[15,16], and the frequency modulator which is shown mounted in a laboratory testing cradle in Fig. 5 has a performance adequate to meet C.C.I. transmission standards when carrying either 625 line television or considerably more than 600 telephone channels. The circuit diagram of the frequency-modulated oscillator section of this unit is shown in Fig. 6. The mean frequency of the oscillator is 35Mc/s and it is frequency doubled to provide the required 70Mc/s output signal.

Demodulators

The demodulators used in broad-band systems have to handle high base-band frequencies and relatively high deviations, and at the same time non-linear distortion must be kept low. Discriminators of the Foster-Seeley or of the two-tuned-circuit type can be operated satisfactorily

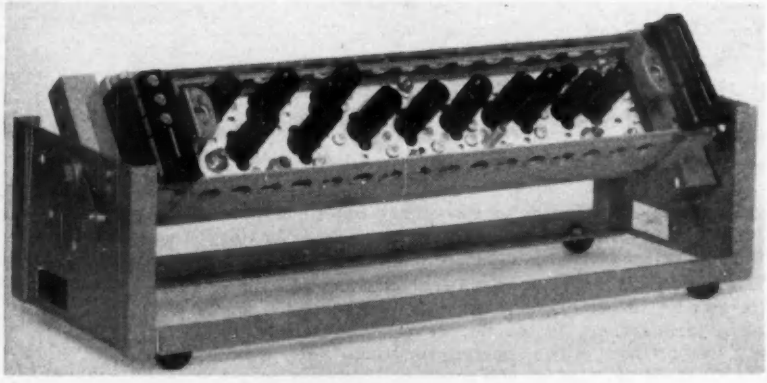

Fig. 5. A Post Office Modulator No. 9A, with front cover removed, shown in a bench mounting cradle of the type used during wiring and laboratory testing. *This modulator accepts either television (up to 625 lines) or multi-channel telephony (up to 960 channels) and provides a frequency modulated carrier centred on 70Mc/s*

in systems carrying television or small numbers of telephony channels; but, when higher standards of performance are required, more complex networks have to be used in the discriminator, and attention has to be paid not only to the linearity of the frequency/voltage characteristic but also to the phase or group-delay characteristic. Some recent 70Mc/s demodulators have used an asymmetrical or unbalanced form of discriminator of high linearity; this has the advantage of simplicity relative to balanced designs of comparable linearity and stability, but the preceding limiter must be somewhat better.

The performance of a limiter should be assessed in terms of the efficiency with which it suppresses amplitude modulation up to at least twice the highest base-band frequency with which it is to be used, and its freedom from conversion of amplitude modulation into phase modulation. Many designs of limiter have been tried out and there has been useful progress during recent years, but much remains to be done in this field. Current designs of demodulator have limiter stages giving well over 40dB suppression of 10 per cent amplitude modulation at any frequency up to 8Mc/s.

The base-band amplifier which follows the discriminator should have the frequency response required by television considerations, yet must have low enough non-linear dis-

tortion for multi-chanel telephony, if either type of traffic is to be handled. A video amplifier with a considerable amount of negative feedback is therefore ecessary.

Group-Delay Equalizers

A typical i.f. amplifier or microwave filter, which has been aligned for a transitionally flat amplitude/frequency characteristic, has a group-delay/frequency characteristic which is approximately quadratic in shape; i.e. it may be represented by a linear plus a square-law component, with the latter (parabolic curvature) generally predominant. The group-delay at the apex is normally a minimum. In modern systems fixed equalizers, generally of the all-pass bridged-T type, are used extensively to counteract group-delay distortion: they may be built into i.f. units or inserted as required in the interconnecting cables between units.

Even with the best available techniques, the cumulative delay distortion in a complete system may be larger than is permissible and may be subject to small variations with ageing of equipment or environmental changes. It is desirable, therefore, to have the facility for inserting a 'mopping-up' equalizer prior to the terminal demodulator of a system. A suitable variable group-delay equalizer has been developed[17,18] to provide independent and continuously variable controls for slope and parabolic curvature over a nominal bandwidth of ± 6Mc/s centred on 70Mc/s. The range of slope adjustment is from − 1 to + 1mμsec/Mc/s, while the parabolic control has a range of 0 to +10mμsec delay at midband relative to that at ± 6Mc/s. The principles involved are applicable to other bandwidths, and can perhaps be extended to provide variable correction for curvature corresponding to higher order terms of a power series, thus allowing more accurate equalization of the edges of the band in a long system.

Aerials and Feeders

One of the remarkable features of line-of-sight microwave point-to-point radio circuits is that a very low transmitter power gives an adequate performance; for example an output of less than 10W is normally satisfactory. One reason for this is the fact that almost all the radiated energy is concentrated in a narrow beam accurately steered towards the receiving station by a highly directive aerial. The principles of operation of paraboloid dish reflectors are now well documented[19], and the Laboratories have concentrated on the development of the associated waveguide feeders and launching units. Particular care must be taken with accuracy of impedance matching at joints, as a poorly constructed joint in a long waveguide feeder can cause enough reflection of energy to give a perceptible return wave. If this suffers a reflexion at a second mismatch the forward-travelling echo, which has been delayed relative to the main signal, will create intermodulation noise on the telephony channels or an echo on a television screen. For example, a voltage-standing-wave-ratio of 0·93 (i.e reflection coefficient of 3·5 per cent) at each end of a 125ft length of copper waveguide feeder can give rise to intermodulation noise of −75dB in the uppermost channels of a 600 channel telephony link and there may be many such points in a system. Brass flanges ¼in thick with accurately ground faces, dowelled together at joints, are used to connect lengths of waveguide to build up long runs. Corrosion inside the waveguide is prevented by pressurizing[20] with a dry gas.

The performance of a dish aerial depends among other things on the design of its launching unit, that is, the device that radiates the energy carried by the feeder so as to illuminate the whole area of the paraboloid. The prevention of spill-over at the edges of the dish is important in reducing radiation in unwanted directions. For this, and other, reasons a 90° type of paraboloid (i.e. one which has its focus in the plane of the rim of the dish) is preferred by the Laboratories.

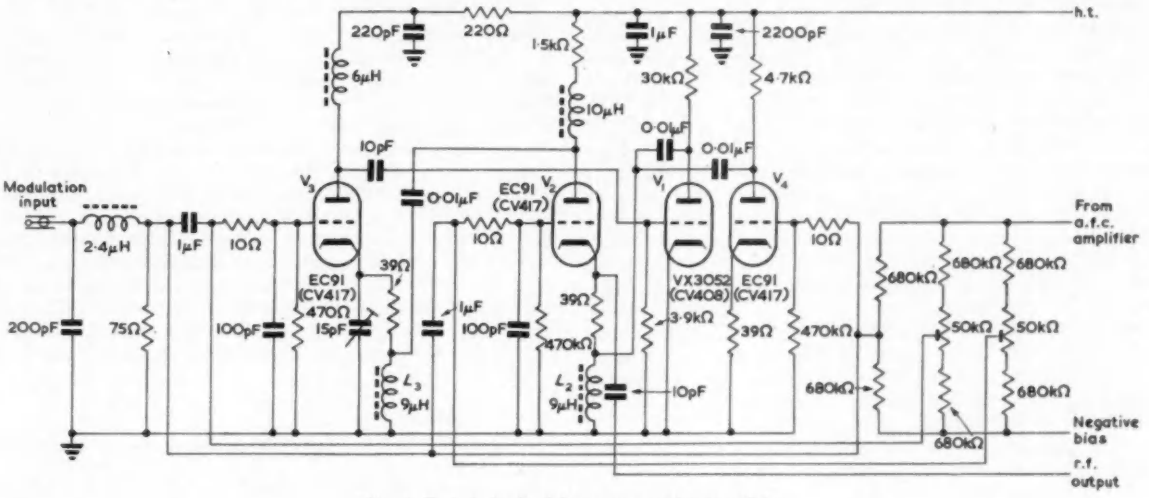

Fig. 6. Typical circuit of frequency modulated oscillator

Waveguide Filters

Filter technique for microwave frequencies has grown in step with the requirements of broad-band systems, and filters can now be designed in waveguide[21] with complete confidence. The design data for post-type waveguide filters has been reduced to nomogram and chart form.

The group delay characteristic in the pass-band is that property of a band-pass filter which is most critical in a broad-band f.m. system, as non-uniformity of this delay leads to intermodulation noise in telephone channels. Much of the development effort in waveguide filters has therefore been concentrated on this aspect of design technique. One of the shortages in test equipment that has not yet been satisfactorily overcome is means for measuring this group delay at 4 000Mc/s to the accuracy of 0·1mμsec

required for design work. Accurate group-delay measurements at 4 000Mc/s are among the most difficult of all tests to carry out. Voltage standing-wave ratio measurements, by which waveguide filters are 'aligned', are easy by comparison.

There is still much interesting work for the filter designer in the microwave system field, for example, in connexion with the development of branching filters, used to combine on to one aerial feeder a number of r.f. channels derived from separate transmitters working on different carrier frequencies. As many as six such r.f. channels may eventually have to be combined in the 4 000Mc/s band, but the highest number yet in actual service using branching filters developed in the Laboratories is four, on the television circuit from London to the Isle of Wight.

Carrier Generation

It will have been seen earlier that an automatic frequency control unit forms part of each microwave transmitter and receiver on the Elgin-Wick link[8]. This electromechanical device adjusts the frequency of a klystron oscillator to within ±100kc/s of that of a high stability cavity resonator. The frequencies of the two ends of the link are independent; each has its own reference cavity with an associated a.f.c. unit so that the cumulative error in the receiver i.f. should be less than 200kc/s. Automatic frequency control units are, however, complicated devices and the generation of microwave carriers from highly stable quartz crystal oscillators[22] is now considered better technique.

The enormous increase in frequency from a few megacycles per second, at which quartz techniques are excellent, to 4 000Mc/s cannot be met directly by quartz crystals oscillating in a fundamental or overtone mode. Before microwave carriers could be controlled by quartz crystals it was necessary to await the arrival of valves suitable for frequency multiplication stages working from tens of megacycles to 4 000Mc/s. Only recently have such valves become available in reliable form. As a result, a long-term carrier stability with 1 part in 10^6 can now be achieved at 4 000Mc/s, although this high degree of performance may be unnecessary with present systems using frequency modulation techniques.

The measurement of frequency at microwaves has so far been done by means of precision cavity wavemeters. A cavity with calibrated screw adjustment for frequency determination at 4 000Mc/s has to be a most carefully constructed instrument using the most advanced mechanical techniques; the laboratory's frequency measuring group has recently completed a development project on such a wavemeter[23], suitable for adjusting microwave carrier frequencies to within one part in 10^5.

Microwave Components

The most generally useful size of guide for 4 000Mc/s is the waveguide No. 11 (2·372in × 1·122in inside dimensions) and this has, with few exceptions, been accepted by designers as the standard for the 4 000Mc/s band. Since no components for No. 11 waveguide were available commercially when 4 000Mc/s system development started, the Laboratories were forced to develop most of their own microwave components. For example, development work has been done on the design of bends and twists, on impedance transforming sections and new designs of directional couplers. A good deal of effort has been devoted to the development of frequency-changing devices, both travelling-wave tubes and crystal mixers[23], for use in microwave systems. There is as yet no completely satisfactory engineering solution, but recent development in America on junction diode convertors may lead to the eventual answer.

In the early 1950s there was much rivalry between the development of systems using microwave triodes and those using travelling-wave valves. The Laboratories decided to use the latter[24] for work on 4 000Mc/s broad-band amplifiers, on the grounds that travelling-wave tubes are capable of development to wider bands and higher frequencies, whereas triodes are essentially narrow-band devices that require extremes of manufacturing technique to make them operate in the microwave region. Subsequent events have justified this decision, and on future systems development will be concentrated, as hitherto, around travelling-wave tube amplifiers.

Measuring Equipment and Techniques

In many fields of applied science the rate of progress and the standard of performance which can be achieved are directly dependent on the development and refinement of associated measuring techniques. The development of broad-band radio relay systems is no exception, and over the last ten years almost half of the experimental and development effort available in the Laboratories for work on broad-band radio systems has been devoted to the exploration and improvement of measuring instruments and techniques.

Since system performance tolerances are very stringent, the discrimination required in measurements is of a high order and, in general, is not easy to achieve. Wide frequency bands are normally involved, and the effects, over the whole band, of circuit changes or adjustments in equipment under test must be immediately observable. Scanning methods are always quicker and generally far more satisfactory in this field than point-by-point methods. Measuring instruments using oscilloscopes can be made not only to display very small quantities, but also to permit their measurement just as accurately as laborious point-by-point methods, and scanning methods have been found to be of great value in the improvement of broad-band radio equipment. On the other hand these precision measuring instruments are both complex and expensive to develop and build.

Scanning Oscillators

In any scanning or sweeping oscillator for use in broad-band system measurements, a large and continuously variable width of scan, easy adjustment of centre frequency, an accurate frequency calibration arrangement, low harmonic content and a high degree of uniformity of amplitude over the scanning range may be regarded as essential requirements.

The simplest form of microwave scanning oscillator is probably a reflex klystron with a suitable waveform applied to its reflector electrode; at 4 000Mc/s a scan of 30Mc/s is typical. When larger frequency scans are required (e.g. 50 to 100Mc/s), electromechanical arrangements such as motor-driven rotating paddles[24] or vibrating diaphragms have been used fairly extensively. During the last few years, however, not only carcinotrons but also normal travelling-wave tubes with external feedback have found applications as convenient electronically-controlled scanners for very wide bandwidths.

For i.f. use, many forms of scanner have been tested, and three types have been found particularly suitable for incorporation in broad-band precision test equipment. The first of these i.f. scanners uses a small ferrite core in the inductor of a v.h.f. oscillator and the frequency sweep is obtained by applying an external magnetic field. This arrangement was combined with suitable oscilloscope display facilities in a compact and transportable instrument developed during 1953-4 for accurate measurement of (a) gain/frequency characteristics and (b) reflection coefficients.

The output from this instrument is flat to within ±0·1dB from 45 to 85Mc/s.

A second type of i.f. scanner is based on the phase-shift oscillator principle, using cathode-follower or earthed-grid valves as the variable resistance elements[13]. Variants of this type of scanning oscillator have been embodied in several measuring instruments and they possess the merits not only of high linearity but also of being usable with very high scanning frequencies or complex scanning waveforms. It is of interest to record that the Post Office type of i.f. modulator already discussed started as a by-product of early work on these scanners.

In the third type of i.f. scanner the output signal is the difference frequency of two reflex klystrons, one or both of the klystrons being modulated by electronic, or occasionally mechanical, means. A scanner of this type offers great flexibility of output frequency and has advantages in measuring equipment which may at some time have to operate on a frequency band other than that for which it was originally intended.

Group-Delay Measurement

In measuring group-delay distortion, whether of a simple network or a complete system, it is necessary to determine the departure from uniformity of the slope of its phase/frequency characteristic; i.e. to determine either (a) the variations in the increments of insertion phase shift corresponding to equal intervals of frequency, or (b) the intervals of frequency corresponding to equal increments of phase (e.g. 180° or 360°). The former method has been more widely used in scanning equipment, since the frequency interval can readily be fixed by using a modulated test signal and the problem is then reduced to the measurement of small changes in the phase difference between the original modulation and that extracted from the test signal after it has passed through the network under test; but for the order of delay distortion which is of interest these differential phase changes are very small, and can readily be masked by spurious phase fluctuations. For example, even when the measuring interval is as large as 1Mc/s, a change of 1mμsec in group-delay corresponds to approximately 0·36° change of phase increment.

Early group-delay measurements had to be made by laborious methods, but during the early 1950s a versatile instrument was developed for the display and measurement of the gain/frequency and group-delay/frequency characteristics of networks[25]. This instrument covered a band of approximately 20Mc/s, centred on 60Mc/s, and the discrimination for delay distortion measurements was about 10^{-9}sec, i.e. 1mμsec. A number of instruments of this design, centred on 60Mc/s, were built; but with C.C.I.R. standardization of 70Mc/s as the centre frequency for broad-band i.f. equipment, the original instrument had to be modified for operation over the band 60 to 80Mc/s.

By the addition of a pair of frequency convertors, i.f. group-delay measuring equipment of this type has been extended to be usable for measurements in the 4 000Mc/s band, and useful information has been obtained on the characteristics of microwave filters and amplifiers.

Amplitude modulation methods of group-delay measurement have also been explored and, in work on 70Mc/s a.m. equipment, a discrimination of about 0·1mμsec has been reached. Group-delay measuring equipment using amplitude modulation must, of course, be restricted in application to passive networks or those including only linear amplifiers, and it is not suitable for use with limiting amplifiers. Further work is still in progress on the development of f.m. group-delay measuring sets for both microwave and intermediate frequencies.

For overall testing of systems, the group-delay measuring equipment may have to be split into two parts and the frequency increment is usually reduced to 100 or 200kc/s. Where looping of the system under test is impracticable and no parallel system is available, the reference frequency required at the receiving end has to be provided by such methods as (a) using a separate crystal controlled oscillator, or (b) extracting it from the system under test via an extremely narrow band filter capable of eliminating the sidebands it has acquired.

Measurement of Non-Linear Distortion

A frequency-division multiplex telephony signal having a large enough number of channels can be simulated with reasonable accuracy by using a band of uniform random noise having the same upper and lower frequency limits. The insertion of a narrow band-stop filter can then provide

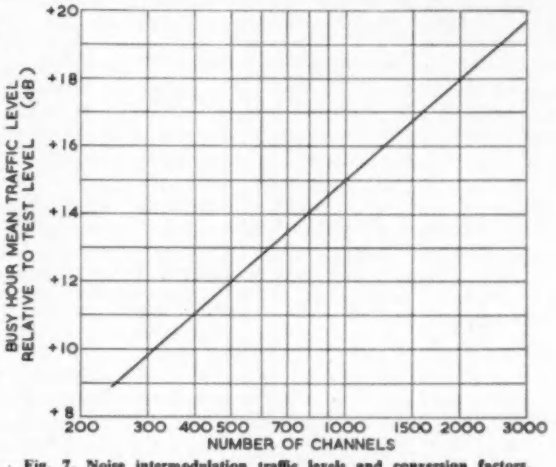

Fig. 7. Noise intermodulation traffic levels and conversion factors. (C.C.I.R. Warsaw 1956)

Conversion factors 4kc/s flat 15·1dB; 3·1kc/s flat 16.2dB; Psophometric 18·7dB

Notes:—Conversion factor is added to the measured noise-power ratio (n.p.r.) to give signal-to-noise ratio. Busy hour mean traffic level = (−15 + 10log n)dBm, for N > 240

the equivalent of an unloaded or quiet channel in an otherwise fully loaded base-band, and at the far end of the system under test a measurement can be made of the total noise and crosstalk appearing in this stop-band[26]. This technique has now been in regular use for several years and has proved to be a most satisfactory and expeditious way of assessing telephony performance of radio or cable systems. The method was accepted in principle by the C.C.I.R. at their 1956 meeting in Warsaw, and for systems of 240 or more channels the level of the test signal to be used was agreed upon. This is shown in Fig. 7.

The generator or sending end of the standard Post Office intermodulation measuring equipment provides bands of noise simulating 120, 240, 600 or 960 channels and incorporates narrow band-stop filters centred on 70, 534, 1 002, 2 438 and 3 886kc/s. The receiver for use at the output of the system under test is crystal controlled and can be switched to any one of these five frequencies: it operates at fixed gain and is preceded by an input attenuator.

The method of making a measurement is simple. The generator is set to the desired number of channels and a flat band of noise is applied at appropriate level to the system under test. The receiver is set to the selected stop-band frequency and its input attenuator adjusted for an arbitrary output level indication. The appropriate band-stop filter is then switched into circuit at the sending end

and the receiver input attenuator readjusted for the same indicated level as before. The difference between the two attenuator settings is termed the 'noise-power ratio' (n.p.r.) for that particular loading and that stop-band frequency, and is now widely accepted as an accurate and convenient index of performance. It is important to stress that noise-power ratio should be regarded as a more fundamental and more useful figure than signal-to-noise ratio for assessment or specification of system performance.

Signal-to-noise ratio can be derived from noise-power ratio by adding the appropriate conversion factor under Fig. 7. This conversion factor may be regarded as an allowance for the difference between channel test-tone level and the proportion of the total noise-power loading which is effectively applied to any one channel. For example, to obtain mean busy hour performance data on a 600 channel system, noise loading would be applied at a level of +12·8dB relative to the test-tone level; but when making the upper measurement of a pair for noise-power ratio (band-stop filter out), this noise power is spread evenly from 60kc/s to 2 540kc/s, a total of 2 480kc/s. The noise power in 3·1kc/s is 3·1/2 480 of the total power (i.e. −29dB relative to the total power) and so is +12·8 − 29 = −16·2dB relative to the test-tone level. A conversion factor of 16·2dB must therefore be added to the n.p.r. to get the unweighted signal-to-noise ratio in a 3·1kc/s bandwidth. Psophometric weighting of uniform noise in the standard 300 to 3 400c/s band introduces a further factor of approximately 2·5dB, and the conversion factor which must be added to the n.p.r. to get the weighted signal-to-noise ratio is therefore 16·2 + 2·5 = 18·7dB.

Spectrum Analyser

It is often useful to examine the frequency spectrum of a radio signal and it is desirable that the method adopted should be both accurate and rapid. In 1948 a panoramic receiver was developed which used electro-mechanical scanning to display and to measure signals in the frequency band 55 to 65Mc/s, and which could be extended to other bands with the aid of frequency convertor units.

More recently an improved spectrum analyser has been developed for the display and measurement of signals occupying a larger bandwidth. In this instrument the frequency sweep is produced by varying the field applied to a ferrite core in the inductor of a Colpitt's oscillator. The mean frequency is adjustable in one range from 25 to 140Mc/s and the sweep width is continuously variable from about 1Mc/s up to about 50 per cent of the mean frequency. Alternative 3dB bandwidths of 7kc/s and 35kc/s, a choice of a linear or logarithmic amplitude display and the provision of accurate frequency markers at 10Mc/s or 2Mc/s intervals are other useful features of this compact transportable instrument.

Linearity Test Set for Modulators and Demodulators

Another type of instrument which is essential to progress in the field of broad-band radio-relay systems is one which will check the linearity of a frequency modulator or demodulator. Such instruments are generally arranged to display the derivative of the frequency/voltage or the voltage/frequency characteristic and they are required to be able to measure variations in slope of well under one per cent. Since the dynamic linearity of some frequency modulators and most demodulators varies with base-band frequency, it is important to make this measurement at more than one modulating frequency. Derivative test sets with a fixed test frequency have been in use for many years; these are not really adequate for work on broad-band systems, and more recent Post Office linearity test sets have universally embodied a range of test frequencies. Two-tone testing techniques have also been tried out in instruments which display the change in level of a second or third order intermodulation product as a carrier with two-tone modulation is swept across the frequency band; but it is doubtful whether the additional complications involved are really justified.

Location of Reflections in Waveguide Feeders

The location of mismatches in long waveguide feeders can become a major problem, especially as most radio aerials are erected in exposed sites where high winds and low temperatures make careful mechanical work difficult. An interesting piece of test equipment that will locate mismatches of the order of half per cent in a waveguide feeder has been developed[27]. The principle is akin to that of f.m. radar. A carcinotron oscillator working in the 4 000Mc/s frequency band is regularly swept over a range of up to 300Mc/s to generate a sawtooth of frequency, with a periodicity of 50c/s. The oscillator output is connected to the waveguide through a double-probe detector section, where the beat frequency between the forward wave and any returning reflected wave is detected. The beat frequency is proportional to the distance between the detector and mismatch.

Insertion Loss Measurement

Mention has already been made of the difficulties experienced in measuring the performance of microwave filters with sufficient accuracy. Insertion loss measuring equipment has been developed especially for this purpose. A simple set[21]. in which the microwave testing frequency is pulsed at 1kc/s, and using waveguide attentuators, has been in use for many years. A more recently developed set using frequency changers and a piston attenuator at an intermediate frequency is now in use and this is proving a satisfactory precision instrument.

Trends of Development

Performance, reliability and cost per channel are the primary criteria by which a radio relay system must be judged. If the system is to form part of the trunk telephone network, then C.C.I.R. standards of performance are virtually mandatory and reliability and cost per channel remain as the yardsticks of progress. The importance of reliability in large-capacity traffic arteries cannot be stressed too much and its improvement must ever remain a major objective of the designer. Since the cost per channel can be reduced either by lowering the total cost or by increasing the traffic capacity of a system per carrier frequency, two general lines of development become apparent, leading respectively to (a) simpler systems and (b) systems of much higher traffic capacity.

Simplicity is always desirable since it offers not only increased reliability but also lower capital and maintenance costs. If simplicity can be combined with reduced size, and especially with much lower power consumption, building costs and the cost of standby power supplies can be greatly reduced. An h.t. supply of 150 to 180V is adequate for modern i.f. units, and recent developments in power transistors and silicon junction rectifiers offer the possibility of deriving the high voltage required for a permanent-magnet-focused travelling wave valve from this 150 to 180V supply in a simple and efficient manner. The supply voltage and power consumption can be further reduced when transistors suitable for use in 70Mc/s i.f. units are readily available.

As the reliability of the radio equipment is improved, it will be necessary further to improve the reliability of the power supplies, since in many systems the latter is already a limiting factor on the overall reliability.

Travelling-wave valve amplifiers with permanent magnet fields will simplify equipment and save the power required to energize the solenoid. Improved mixers are needed to work with these travelling wave amplifiers. Ferrite isolators will be of great assistance to designers and maintenance engineers in reducing reflection problems and enabling lower degrees of matching to be used in components that have awkward impedance characteristics. The Radio Laboratories are devoting much time to this problem; unfortunately around 4 000Mc/s is one of the more difficult frequency bands for the production of stable ferrite material suitable for this work.

Current techniques of equipment design in the Laboratories provide adequate margins on the C.C.I.R. performance requirements for systems carrying 600 or more telephone channels. With further work on various outstanding problems it may eventually be possible to reach about 1 800 channels (or television plus 600 to 900 channels) within the framework at present agreed of 29Mc/s channel spacing and 70Mc/s i.f.

The combining of several r.f. carriers on to one aerial is already offering a satisfactory way of providing more telephone channels on a route; this technique uses branching filters, by which the various transmitter outputs (each one an r.f. channel) can be combined. Similar branching filters are needed to separate the r.f. channels at the receiving end, or to add or extract channels as required. From this point, which has already been reached, the logical step is to use very wide band aerials capable of dealing with more than one frequency band; for example, one horn aerial system can carry all the r.f. channels from 2 000Mc/s upwards on a major route.

Acknowledgments

An article that surveys the work of a large laboratory organization in even a narrow field necessarily owes a debt to the work of many engineers over a period of many years. It would be invidious to single out any individual by name, but the authors are appreciative of the development work of their colleagues in the broad-band microwave field.

Their thanks are also due to the Engineer-in-Chief of the Post Office for permission to publish this article.

REFERENCES

1. NANCARROW, F. E. Ultra-short Radio Waves and the Cardiff-Weston-super-Mare Radio Link. *P.O. Elect. Engrs' J.25*, 303 (1933).
2. MUMFORD, A. H. The Guernsey-Chaldon Ultra-Short-Wave Radio Telephone Circuit. *P.O. Elect. Engrs' J. 29*, 124 (1936).
3. GILL, A. J. Wireless Section. Chairman's Address. *J. Instn. Elect. Engrs. 84*, 248 (1939).
4. MUMFORD, A. H. Recent Developments in Communications Engineering. *J. Instn. Elect. Engrs. 93*, Pt. 3, 2 (1947).
5. SOWTON, C. W., HOLLINGHURST, F. Résumé of V.H.F. Point-to-Point Communication. *J. Instn. Elect. Engrs. 94*, Pt. 3A (1947).
6. MERRIMAN, J. H. H., WHITE, R. W. The Application of Frequency Modulation to V.H.F. Multi-Channel Radio Telephony. *J. Instn. Elect. Engrs. 94*, Pt. 2A, 649 (1947).
7. MUMFORD, A. H., BOOTH, C. F., WHITE, R. W. The London-Castleton Experimental Radio-Relay System. *P.O. Elect. Engrs' J. 43*, 93 (1950).
8. CORKE, R. L., EPHGRAVE, E. V., HOOPER, J., WRAY, D. A 4 000Mc/s Radio System for the Transmission of Four Telephony Supergroups (240 circuits). *P.O. Elect. Engrs' J. 50*, Pt. 2, 106 (1957).
9. FROOM, R. P., MADDER, J. D. C., HILTON, C. G. A 4 000Mc/s Radio System for the Transmission of Four Telephony Supergroups (240 circuits), Part 2. *P.O. Elect. Engrs' J. 50*, Pt. 3, 150 (1957).
10. BRAY, W. J. The Travelling-Wave Valve as a Microwave Phase-Modulator and Frequency-Shifter. *J. Instn. Elect. Engrs. 99*, Pt. 3, 15 (1952).
11. KILVINGTON, T. The London-Isle of Wight Television Link, Stage 1. *P.O. Elect. Engrs' J. 48*, Pt. 1, 36 (1955).
12. HAMER, R., GIBBS, C. H. A Broad-Band Intermediate-Frequency Amplifier for use in Frequency-Modulation Microwave Radio Relay Systems. *P.O. Elect. Engrs' J. 50*, 124 (1957).
13. WHITE, R. W., RAVENSCROFT, I. A. A Frequency Modulator for Broad-Band Radio Relay Systems. *P.O. Elect. Engrs' J. 48*, 108 (1955).
14. HAMER, R., RAVENSCROFT, I. A. British Patent No. 731592.
15. RAVENSCROFT, I. A. An Improved Frequency Modulator for Broad-Band Radio Relay Systems. *P.O. Elect. Engrs' J. 50*, 186 (1957).
16. RAVENSCROFT, I. A. British Patent Application No. 38142/56.
17. HAMER, R., WILKINSON, R. G. A Broad-Band Variable Group-Delay Equalizer. *P.O. Elect. Engrs' J. 50*, 120 (1957).
18. HAMER, R., WILKINSON, R. G. British Patent Application No. 10507/56.
19. CORKE, R. L., HOOPER, J. Aerials for 4 000Mc/s Radio Links. *P.O. Elect. Engrs' J. 50*, Pt. 3. 178 (1957).
20. HOPPS, J. G. A Pressurised Waveguide System. *P.O. Elect. Engrs' J. 49*, 52 (1956).
21. FLOYD, C. F., RAWLINSON, W. A. An Introduction to the Principles of Waveguide Transmission, Pt. 2. *P.O. Elect. Engrs' J. 47*, Pt. 3, 157 (1954).
22. SCARBROUGH, R. J. D., FERGUSON, K. H., SEARLES, A. W. The Generation of Stable Carrier Frequencies in the Range 3 800-4 200 Mc/s. *P.O. Elect. Engrs' J.* To be published.
23. WRAY, D. British Patent Application No. 29554/57.
24. FLOYD, C. F. An Introduction to Microwave and Waveguide Transmission. *P.O. Elect. Engrs'*. To be published.
25. WHYTE, J. S. An instrument for the Measurement and Display of V.H.F. Network Characteristics. *P.O. Elect. Engrs' J. 48*, 81 (1955).
26. WHITE, R. W., WHYTE, J. S. Equipment for Measurement of Inter-Channel Crosstalk and Noise on Broad-Band Multi-Channel Telephone Systems. *P.O. Elect. Engrs' J. 48*, 127 (1955).
27. HOOPER, J. A Swept-Frequency Method of Locating Faults in Long Waveguide Runs. *P.O. Elect. Engrs' J.* To be published.
28. TATTERSHALL, R. L. O. A High-Accuracy Experimental Cavity Frequency Meter for use at 4 000Mc/s. *P.O. Elect. Engrs' J.* To be published.

G.P.O. Orders First All-Travelling-Wave-Tube Radio Links

The G.P.O. has placed an order with Marconi's Wireless Telegraph Company Ltd for the supply and installation of a single-way u.h.f. radio link between London and a point near Norwich. The link provides two broadband channels primarily intended for the conveyance of television signals, but, if the necessary return channels were provided, they could be used for telephony, each being capable of providing up to 600 high-grade telephone channels simultaneously.

The contract is particularly interesting on three counts: Not only will the equipment handle black-and-white television signals, it has also been designed with a view to transmitting 405- or 625-line colour television signals, should this be required. It is the first order for all-travelling-wave-tube equipment to be placed for use in this country, and will be engineered to C.C.I.R. and C.C.I.T.T. standards for the provision of the 600-telephone-channel facility.

The route will run from the Museum Exchange in London, via repeater stations at Ongar, Sibleys and Ousden, to the terminal station between Norwich and Ipswich. Marconi HM 200 equipment will be used at the terminals, with HM 250 repeaters at the intermediate stations.

It is hoped to bring the link into operation in the spring of next year.

The type HM 200 equipment is designed to meet the requirements of C.C.I.R. and the British Post Master General for long distance international wide-band communications systems. Both television and multi-channel telephony circuits can be carried, each HM 200 radio circuit being capable of carrying either 600 telephone channels or one television channel of 405, 525 or 625 line standards.

A comprehensive supervisory system is available which includes, for the provision of urgent and non-urgent fault alarms, a party line speech channel between all stations, and interrogation of repeaters to identify fault conditions.

Since the HM 200 radio relay equipment is designed to be used in systems employing up to six parallel radio paths providing a total capacity of 6 simultaneous television circuits or 3 600 telephone channels, the supervisory system has been designed as a completely separate entity, which can be used over a separate bearer channel to control a multi-path radio relay system. The use of this facility avoids the necessity for providing independent supervisory systems for each radio circuit. This, in turn, reduces the capital cost of the relay system, and avoids unnecessary duplication of equipment. However, to provide the maximum degree of flexibility, the supervisory circuits can be inserted below the carrier baseband, on a single or twin path multi-channel radio relay system, thus avoiding the need for a separate bearer channel.

A single terminal will occupy three racks of equipment, one for the transmitter, one for the receiver and one for the modulator and demodulator circuits.

SURVEYING FOR MICROWAVE RELAY SYSTEMS

By L. E. Strazza*, B.Sc., Assoc.Brit.I.R.E., and R. C. S. Joyce*

The overall performance of well-planned microwave radio relay links can be predicted with a high degree of reliability; good planning also enables overall system costs to be estimated with considerable accuracy. This article describes the role of surveying in planning telecommunications systems of this kind. Surveys in well-mapped regions may only involve site and path inspections but where the accuracy of path profiles plotted from maps is doubtful path tests are made. The tests may be of short duration if, as is usually the case, they are intended to confirm a calculated mean path loss and hence to confirm tower heights, aerial gains and similar system parameters. Long-term tests are made when the path profile is unfavourable and statistical information on fading is required. Typical methods of testing are described.

THE aim in planning fixed point to point microwave radio links, whether for the transmission of television or multi-circuit telephony signals, is to make an effective compromise between the optimum performance and reliability that can be achieved and economy in capital outlay and maintenance costs.

Since the overall performance of a line of sight microwave system is determined partly by the parameters of the equipment itself and partly by the manner in which the equipment is applied to the system, it is imperative that both the route and installation of the equipment be carefully planned.

It is generally known that microwave radio systems require a line-of-sight path between transmitting and receiving aerials but in practice the received signal is dependent on many other factors.

These factors are as follows:

(a) *There must be adequate clearance between the line of sight and the intervening terrain*

Merely providing a line-of-sight path is not enough since a significant portion of the radiated signal energy does not follow a straight line between transmitting and receiving aerials but occupies a volume embracing several Fresnel zones. A path between two stations must therefore be planned to ensure that there is at least 0·6 × 1st Fresnel zone clearance above all obstacles in the radio path under adverse atmospheric conditions in order to obtain an average path attenuation approximating to the free space loss. A table relating 1st Fresnel zone clearance and path length for propagation in the 2 000Mc/s band is given in the Appendix.

(b) *Multi-path reception*

Certain types of terrain such as water or flat desert areas act as good reflectors of microwaves with the result that the receiving aerial receives the direct signal together with signals that have been reflected. These signals, by virtue of the fact that they have travelled over paths of different lengths, arrive in-phase or out-of-phase to partly re-inforce or cancel the received signal, depending on whether the direct path clearance over the reflection point is equal to an odd or even number Fresnel zone, there being a one half wavelength difference in the reflected signal path between each successive zone. Sites and aerial heights should if possible be chosen so that the reflected signals due to 2nd or higher Fresnel zones are prevented from reaching the receiving aerial by some natural obstruction. It should be borne in mind that under varying atmospheric conditions which cause effective earth bulging or flattening the reflected signal may pass through several Fresnel zones which may cause the received signal level to pass through successive minima if the clearance between the direct path and reflection path is large. Multi-path signal reflections can be obtained from a stratum of air over the radio path in which the dielectric gradient abruptly changes, such as is caused by a temperature inversion. This effect when investigated, sometimes coincides with meteorological con-

* *The General Electric Co. Ltd.*

ditions obtaining at that particular time and the cause of fading can be diagnosed. In a twin path scheme operating with different frequency allocations fading on each path is usually sufficiently uncorrelated to ensure adequate continuity of service although there is a possibility of some echo distortion occurring during a severe fade.

(c) *Fading*

Fading, in addition to being caused by reflections giving rise to multi-path signals, is also due to variations in the earth's atmosphere which cause refraction or scattering of the radio beam. Fading due to these causes is more prevalent in those parts of the world where the air becomes quite still or very humid. Experience has shown that in some territories fading can be estimated with a reasonable degree of accuracy while in other areas prolonged propagation testing is the only way in which accurate data can be obtained.

(d) *Overshoot*

Under certain atmospheric conditions signals may be transmitted over distances considerably in excess of the normal repeater section and care must be taken that significant signals cannot be received at stations other than the adjacent stations.

This ' overshoot ' reception as it is called is very probable when the relay stations are sited more or less in a straight line. Therefore stations should be sited wherever possible to form a zig-zag route. If this is not possible then the transmitted frequencies must be selected so that at any station the signal received from the adjacent station and any overshoot signal received are at different frequencies.

Preliminary Stages of Planning—Map Study

If large scale maps of the territory are available then the microwave relay system can be tentatively planned before a visit is made to the sites.

Tentative sites are located on the maps so that the stations on a multi-hop system are of the order of 30 miles apart. In the case of systems with only a small number of hops, stations may be located at slightly wider intervals but in the case of long systems the cumulative effects of fading on several sections at the same time makes shorter sections desirable.

It must be remembered however that in undeveloped country the addition of one or more relay stations constitutes an increased maintenance hazard besides increasing the capital cost of the project.

In addition to ensuring that the stations fulfil the propagation requirements, serious consideration has also to be given to the necessity for siting stations so that access to them is as economic and practicable as possible, both during the initial erection of the station and during its operational life. Therefore a compromise has to be sought.

Once the tentative site locations have been decided profiles of each radio path are prepared on graph paper based on true earth radius in order to ensure that there is at least 0·6 × 1st Fresnel zone clearance over any obstacles in the path. Some authorities employ a scale of 4/3 × true earth radius for the profile, but the authors consider it is better to use the more conservative scale of $k = 1$. This will give some extra margin over buildings or trees in the path which cannot always be accounted for by map study. If a scale of $k = 4/3$ is used path clearances should be checked for lower values of k. Information should also be sought at this stage on the heights of any buildings or trees that could obstruct the path. This information may be available to the contractor if he has already had work in the territory or it may be provided by the customer. If it is not known then it must be eventually determined by a visit to the site.

The preliminary planning enables a rough assessment to be made of system performance and also a budgetary estimate of system costs to be made.

In cases where accurately contoured maps of the territory do not exist or where maps are known to contain inaccuracies an aerial photographic survey is essential and there are contractors specializing in this type of work. This type of survey is however expensive and must be used as sparingly as possible.

Visual Survey of Sites

At this stage the sites should be visited to determine whether visual inspection of the sites will suffice or whether some or all the paths will have to be electrically tested.

The visual survey consists of a visit to each site by a radio engineer and possibly a civil engineer to obtain data about the site itself, how the site can be reached from the nearest road, nature of local obstructions, possibility of reflections from surrounding terrain and all data necessary for the construction of a tower and buildings.

If the radio system is to be located in undeveloped country the task of visiting prospective sites may have to be undertaken partly on foot and this can be both arduous and time consuming. In order to obtain an overall picture of a network as rapidly as possible the use of a helicopter has many advantages. From the air disused and long forgotten tracks, not shown on survey maps, can be quickly identified and this often helps to reduce the costs of building access roads to the site. Also if sites are visited in route sequence the 'plane will fly along the propagation path between two sites and therefore a rough check may be made on obstructions. The photograph on page 262 was taken from a helicopter approaching a proposed site in undeveloped country and it will be noted that topographical features of the site are clearly discernible.

Helicopters, however, cannot be used with safety in some mountainous areas since air turbulence makes them difficult to control.

To summarize, the ground survey should yield answers to the following questions.

(a) Distance from the site selected for the radio station to any existing road and an estimate for building an access road.

(b) Availability of a reliable commercial power supply. If there is a supply near at hand the cost of extending this to the site should be estimated by the power utility. On the other hand if there is no supply or an unreliable one then either dual or standby diesel-electric sets respectively will have to be installed and this will have to be considered when planning the building of access roads. Whereas maintenance personnel can visit the station on a steep graded road by means of a four-wheel drive station wagon the provisioning of fuel oil necessitates an easier gradient and this may lengthen and consequently increase the cost of the road. Sometimes fuel oil is piped from an easily accessible spot to the station itself or, alternatively, the generating plant is housed where it can be reached easily and a high voltage line is run to the repeater station itself; both these schemes simplify the road construction problems but, of course, they have their own drawbacks.

(c) Site conditions. An estimate of the amount of deforestation and levelling that would have to be done before the station and tower could be erected.

(d) Examination of the terrain in the directions of propagation to ensure that the ' lines-of-fire ' are free from obstacles which could diffract or scatter the radio signals:

in particular freedom from rising ground formations close to the site or trees which in summer are clothed in dense foliage and which in time could grow high enough to obstruct the path

(e) The type of sub-soil in order to assess the amount of work and cost of preparing tower and building foundations.

(f) Local climatic information. The prevalence of icing and high winds will influence the type and strength of tower which will be needed.

Buildings may require heating or air conditioning depending on the range of ambient air temperatures experienced. Standby diesel-electric generating plant must start up immediately when called upon to do so and the choice must be made between air-cooled and water-cooled engines. Air cooled are preferable at sites with no water supply but in very cold regions the water-cooled engine has the advantage that the water can be warmed by means of a small heater immersed in the jacket to ensure easy starting.

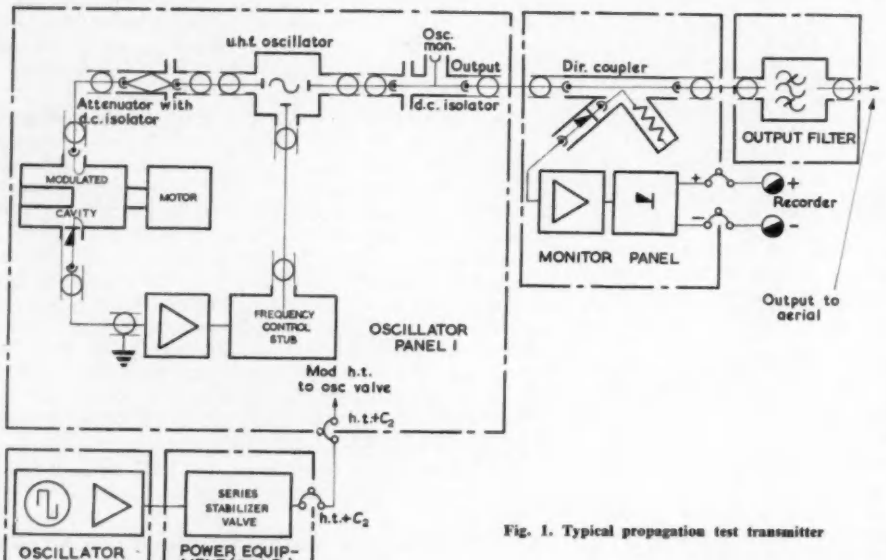

Fig. 1. Typical propagation test transmitter

Propagation Testing

Propagation testing is resorted to when confirmation is required that a line of sight path exists or when data is required on fading conditions.

Line of sight confirmation tests need only extend over a period of 24 to 72 hours during which the received signal is measured and the path loss compared with the theoretical free-space loss of the path.

When data is required on fading conditions the propagation tests must be performed over a very much longer period which should include that period of the year when fading can be expected to be most serious. This can be deduced in some cases from local weather records.

Propagation tests, whether short-term or long-term are usually made in the following way. Two stations are established, one at each of two adjacent sites along the route to be surveyed. One station is designated the 'transmit station' and the other is designated the 'receive station'. The sending station is equipped with a transmitter operating on a frequency which is representative of those proposed for the final system. The transmitter is usually a low-power device (that is to say the output power is in the region of 0·5 to 2·0W) and the signal may be c.w., amplitude modulated or frequency modulated—each type of modulation has advantages as will be explained later. Fig. 1 is the block schematic of a typical propagation test transmitter producing about 0·75W at 2 000Mc/s and in which the carrier is 100 per cent amplitude modulated by a 1:1 square wave with a recurrence frequency of 5kc/s. It will be noted that it consists of a microwave triode oscillator stage provided with an electro-mechanical a.f.c. system and that the h.t. supply to the unit is switched at 5kc/s by a series modulator. The outgoing signal is monitored by a directional coupler and provision is made for connecting a recording milliammeter so that a permanent record of the output level stability may be produced. The output from the transmitter is connected by means of an appropriate low-loss coaxial feeder to the transmitting aerial, which is usually a paraboloidal reflector driven by a dipole and reflector feed unit or by a broad band launching unit.

The receiving station is provided with a receiving system consisting of an aerial (usually identical with the transmitting aerial) a feeder and a receiver. The receiver is generally a fairly conventional superheterodyne receiver employing a low intermediate frequency so that negative feedback can be introduced to stabilize the receiver gain. Fig. 2 is the block schematic of such a receiver in which the i.f. is 2Mc/s and the i.f. amplifier consists of a series of video amplifying 'feedback triples'. Delayed a.g.c. is provided so that a linear relation exists between the input signal level expressed logarithmically and the d.c. output from the receiver which is normally connected to a recording milliammeter. It is usually desirable to record fades as deep as 30 to 40dB and the mean signal level may be abnormally low relative to the level required in the final system, because of the low transmitted power, high feeder losses and low aerial gains, of the survey equipment. On this account the receivers used have a narrow i.f. bandwidth in order to improve the signal-to-noise ratio and hence enable low level signals to be detected.

Other types of receiver are known; for example one authority employs a simple crystal detector followed by a very high gain narrow band audio amplifier. Others, using f.m. transmitters, employ wideband receivers and transmit pulses which, when viewed on a suitable indicating unit can provide information concerning the amplitude and delay characteristics of indirect signals.

Measurement of the Path Loss

Let the level of the signal be P_1 dBw at the transmitter output and let P_2 dBw be the signal level at the input to

the receiver. Both these quantities can readily be measured: P_1 by means of a microwave power meter, usually of the bolometer type and P_2 by calibrating the receiver with a microwave signal generator. It is now an easy matter to calculate the path loss L_P (dB) as follows:

The effective power radiated from the transmitting station is P_T where:

$$P_T = P_1 + G_1 - L_1 \text{ dBw}$$

where:

P_T = Effective power radiated (dBw)
P_1 = Transmitter output level (dBw)
G_1 = Gain of transmitter aerial (dB)
L_1 = Loss in transmitter feeder (dB)

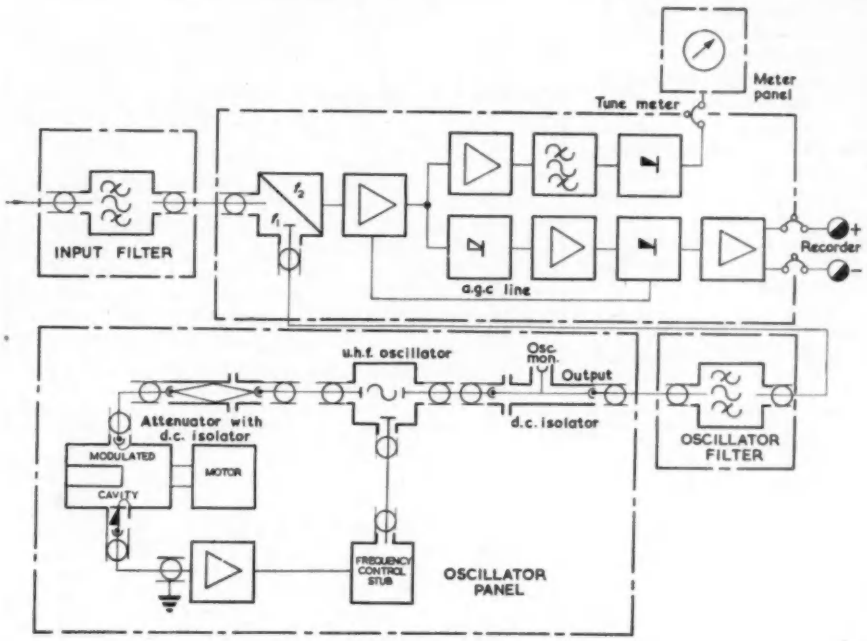

Fig. 2. Typical propagation test receiver

Similarly the effective power received is P_R where:

$$P_R = P_2 - G_2 + L_2 \text{dBw}$$

where:

P_R = Effective power received (dBw)
P_2 = Receive power input level (dBw)
G_2 = Gain of receiver aerial (dB)
L_2 = Loss in receiver feeder (dB)

The path loss L_P is defined as the attenuation between the two stations when isotropic aerials are used, thus:

$$L_P = P_T - P_R \text{ dB}$$
$$L_P = P_1 - P_2 + (G_1 + G_2) - (L_1 + L_2) \text{ dB}$$

In the foregoing expression P_1 and P_2 are measured, G_1, G_2, L_1 and L_2 are known constants and hence L_P can be evaluated.

If fading occurs L_P will vary and hence P_2 will vary; the variations of P_2 will be recorded by the recording milliammeter and provided its speed of response and the chart speed are appropriate for the type of fading to be investigated the depth of fading can be determined by calibrating the receiving equipment. Experience shows that if the equipment described in the two drawings is operated from stable a.c. supplies it can run unattended for many weeks without needing re-calibration; this fact is of great practical importance when making long term tests.

Fading analysers are useful adjuncts or even alternatives to chart recorders. These devices accept a signal from the receiver which is linearly proportional to the incoming signal level. By means of a series of say six to eight electronic gates corresponding to six to eight predetermined signal levels (say at 5dB intervals) and of devices indicating elapsed time and frequency of occurrence it is possible to obtain directly an immediate and continuous analysis of the variations of the path loss so that it is easy to produce the familiar fading versus percentage time curves required for predicting system reliability. Facilities are sometimes provided for automatically photographing the time-indicating devices (clocks or counters) so that loss variations over any desired interval of time can be obtained without manning the station continuously. In all this work of course the recorder associated with the transmitter ensures that apparent path loss variations due to variations or interruptions of the transmitter output can be allowed for.

Aerials and Supports for Surveys

One of the greatest problems besetting the survey engineer is the provision of suitable aerials and supporting structures for surveys. On the one hand the system planner may require aerial heights of up to 400ft and will prefer that an aerial of 'system size' should be used for the tests so that the under-path terrain and obstacles are illuminated to the usual extent while on the other hand local conditions may make either or both ideals impossible to achieve on grounds of physical difficulty, cost, time or all three!

It is usually considered important to make so-called height-gain measurements; these are in fact path loss measurements in which the heights of the transmitting and receiving aerials are varied in turn (preferably in a smooth and continuous fashion rather than in discrete steps so that heights corresponding to signal minima (arising from the destructive interference of direct and indirect signals) may be avoided by accurately known amounts. This requirement is a difficult one to fulfil especially if taken in conjunction with the first two (i.e. of great heights and large aerials). The use of balloons to support the aerials is usually impossible owing to the great directivity of large microwave aerials and the impossibility of stabilizing a balloon. Schemes involving servo-stabilized aerials mounted on helicopters have been tried.

At the present time several authorities employ small paraboloids (say 5 to 6ft in diameter) mounted on trolleys which can be run up and down temporary stayed towers or masts by means of tracks and a winch; usually the bulk of the radio equipment is also mounted on the trolley so

that only power and monitoring cables are required between the trolley and the ground and the usually cumbersome long low-loss r.f. feeders can be dispensed with.

Survey Equipment

In addition to the basic measuring equipment which is the *raison d'etre* of the survey many other things have to be provided and the survey engineer's art lies in knowing what to provide for each project, taking into account many factors such as climate, topography, transport facilities, availability of labour, the duration of the tests, the degree of development in the territory and so on.

In certain cases it is posible to install all the measuring equipment in a comfortable go-anywhere vehicle in which may also be housed communications equipment (reliable interstation communication is indispensable), workshop facilities, meteorological instruments and crew amenities. Aerials and mast equipment and generating plant and camp equipment may be closely associated with the vehicles and the whole caravan is thus completely mobile and can survey routes at a fast rate.

The capital cost of such a caravan is of course high and cannot often be justified. It is more usual to break the equipment down into small easily-handled units which can be transported by any reasonable local means: it should be remembered that in the undeveloped regions the ultimate means of transporting equipment to a desirable mountain peak may be the human being.

Other Means of Surveying Routes

It is sometimes possible to make visual observations between stations to verify that a line of sight exists and to check that the clearances are adequate. Signalling lamps, theodolites and other devices play their part in activities of this kind.

If an aircraft flies over a path at constant height above sea level (by means of a barometric altimeter) and if the aircraft to ground distance is measured by a radio altimeter or by a radar then an accurate path profile can be produced directly and automatically. This method has been tried in un-mapped regions but, of course, it has its difficulties—such as the need for ground control points, good weather and aircraft servicing facilities.

Acknowledgments

The authors wish to express their thanks to the manage-

TABLE 1

DISTANCE d (MILES)	PROPAGATION LOSS (DECIBELS)	DISTANCE d (MILES)	PROPAGATION LOSS (DECIBELS)
6	118·1	41	134·8
7	119·5	42	135·0
8	120·6	43	135·2
9	121·7	44	135·4
10	122·6	45	135·6
11	123·4	46	135·8
12	124·2	47	136·0
13	124·9	48	136·2
14	125·5	49	136·4
15	126·1	50	136·6
16	126·7	51	136·7
17	127·2	52	136·9
18	127·7	53	137·1
19	128·2	54	137·2
20	128·6	55	137·4
21	129·0	56	137·5
22	129·4	57	137·7
23	129·8	58	137·8
24	130·2	59	138·0
25	130·5	60	138·1
26	130·9	61	138·3
27	131.2	62	138·4
28	131·5	63	138·6
29	131·8	64	138·8
30	132·1	65	138·8
31	132·4	66	139·0
32	132·7	67	139·1
33	132·9	68	139·3
34	133·2	69	139·4
35	133·5	70	139·5
36	133·7	71	139·6
37	133·9	72	139·7
38	134·2	73	139·8
39	134·4	74	140·0
40	134·6	75	140·1

TABLE 2

DISTANCE TX–RX (MILES)	HALF-DISTANCE CLEARANCE (FEET)	QUARTER-DISTANCE CLEARANCE (FEET)	ONE-EIGHTH-DISTANCE CLEARANCE (FEET)
10	80·6	69·8	53·3
11	84·5	73·2	55·9
12	88·3	76·4	58·4
13	91·9	79·6	60·8
14	95·4	82·6	63·1
15	98·7	85·5	65·3
16	101·9	88·3	67·4
17	105·1	91·0	69·5
18	108·1	93·6	71·5
19	111·1	96·2	73·5
20	114·0	98·7	75·4
21	116·8	101·2	77·2
22	119·5	103·5	79·0
23	122·2	105·8	80·8
24	124·9	108·1	82·5
25	127·5	110·4	84·2
26	130·0	112·5	85·9
27	132·4	114·7	87·6
28	134·8	116·8	89·2
29	137·2	118·8	90·8
30	139·6	120·9	92·3
31	141·9	122·9	93·9
32	144·1	124·9	95·4
33	146·4	126·8	96·9
34	148·6	128·7	98·3
35	150·8	130·6	99·7
36	153·0	132·4	101·1
37	155·0	134·2	102·5
38	157·1	136·0	103·9
39	159·1	137·8	105·3
40	161·2	139·6	106·6
41	163·2	141·3	107·9
42	165·2	143·0	109·2
43	167·1	144·7	110·5
44	169·0	146·4	111·8
45	171·0	148·0	113·0
46	172·9	149·7	114·3
47	174·7	151·3	115·6
48	176·6	152·9	116·8
49	178·4	154·5	118·0
50	180·2	156·1	119·2
51	182·0	157·6	120·4
52	183·7	159·1	121·5
53	185·5	160·7	122·7
54	187·3	162·2	123·9
55	189·0	163·6	125·0
56	190·7	165·1	126·1
57	192·4	166·6	127·2
58	194·1	168·1	128·3
59	195·8	169·5	129·4
60	197·4	170·9	130·5

ment of the General Electric Co. Ltd, Telephone Works, Coventry, for permission to publish this article.

Appendix 1

Propagation Loss, at 2 000Mc/s Between Isotropic Radiators

The free space propagation loss is given by $(4\pi d/\lambda)^2$ where d is the path length between the transmitter and receiver, and λ is the wavelength. d and λ are expressed in the same units of length.

An alternative expression is:

$$\text{Propagation Loss} = \left(20 \log \frac{\text{Distance in miles}}{\text{Wavelength in cm}} + 126{\cdot}1\right)\text{dB}$$

For a frequency of 2 000Mc/s this becomes:

$$\text{Propagation Loss} = 102{\cdot}6 + 20 \log (\text{distance in miles})\ \text{dB}$$

The free space propagation loss at 2 000Mc/s for different path lengths is shown in Table 1.

Appendix 2

Fresnel Zone Clearances at 2 000Mc/s

The first Fresnel zone is an envelope bounded by points for which the transmission path from transmitter to receiver is greater by one half wavelength than the direct path. Experience in system planning and field tests has shown that approximately free space transmission is obtained with $0{\cdot}6 \times 1^{st}$ Fresnel zone clearance.

The radius of the first Fresnel zone is given by

$R^2 = \dfrac{d_1 d_2 \lambda}{d}$ where all quantities are in the same units.

and d_1 = length of direct path from point above reflection point to transmitter.

d_2 = length of direct path from point above reflection point to receiver.

d = length of direct path between transmitter and receiver.

or $H = 2\,280\sqrt{\left[\dfrac{A \times B}{(A + B)f}\right]}$ feet

where A = length of direct path from point above reflection point to transmitter in miles.

B = length of direct path from point above reflection point to receiver in miles.

f = frequency in Mc/s.

Table 2 gives sufficient points to draw a 1^{st} Fresnel zone envelope at 2 000Mc/s, which is usually sufficiently accurate to cover the band 1 800 to 2 200Mc/s.

Subsequent Fresnel zone clearances are given by multiplying the values by $\sqrt{2}$, $\sqrt{3}$ etc. for the second, third Fresnel zones and so on.

REFERENCES

1. Egli, J. J. U.H.F. Radio-Relay System Engineering. *Proc. Inst. Radio Engrs.* *41*, 115 (1953).
2. Campbell, R. D. Path Testing for Microwave-Radio Routes. *Commun. and Electronics*, No. 7, 326 (1953).
3. Bullington, K. Radio Propagation at Frequencies Above 30Mc/s. *Proc. nat. Electronics Conference, Chicago. 2*, 130 (1947).
4. Von Hagen, W., MacDiarmid, A. N., Goldenburg, L. V. Path Testing of the Trans-Canada TD-2 Route. I.R.E. Convention, Toronto, Canada. Paper 49 (1957).

Microwave Radio Toll Systems

By E. W. Anderson*

The function of the radio link in telephone networks is outlined and some of the problems requiring solution in the design of a short haul or toll system carrying one supergroup are discussed. In particular a solution to the basic defect of non-linearity, by means of overall feedback, in a frequency modulated system is described. This results in an overall simplification of the repeatered circuit.

A TELEPHONE network may be divided into three categories, the subscriber's line, the toll connexion between local exchanges and the main trunk system. The actual channel capacity and length of these interconnexions depends on the extent and density of the system. The trunk system considered as a standard by C.C.I.T.T. for the purpose of specifying a performance extends for 1 500 miles, made up of nine main sections, capable of carrying six hundred or even eighteen hundred channels. Spur links to this type of trunk carrying toll traffic to outlying towns might be considered to have a capacity of about sixty channels and a range of one hundred to two hundred miles, and this article describes the functions and design problems of equipment for the latter type of system. Spurs of greater importance assume the character of secondary trunk systems for which provision is made in the general frequency allocations for radio networks.

It will be apparent that the integration of line and radio to fulfil these two latter functions immediately places restrictions on the radio equipment. The established multi-channel carrier-telephone practice should be equally applicable to radio circuits, in fact the radio link should be indistinguishable from the equivalent repeatered cable section. This implies comparable bandwidths, stability and freedom from noise. The choice of equipment, whether line or radio, should be made to provide the subscriber with an efficient service at a reasonable cost. This includes not only the cost of the equipment, but also that of installation, buildings, roads, power lines, cable ducts, long term maintenance and possible expansion. The assessment of the efficiency and quality of service or circuit reliability is more difficult. This can only be evaluated by extended trials and finally by operation, though past experience is an invaluable guide. Unreliability has as its immediate result, loss of revenue, prestige and added cost of maintenance.

Clearly the higher performance and reliability required of the trunk system together with the larger channel capacity means that the cost rises steeply. On the other hand, it is equally important to cater for an expected expansion without re-incurring too much of the basic cost. One assumes that this type of equipment will have a use-

* *Marconi's Wireless Telegraph Co. Ltd.*

ful life of twenty years, comparable with that of the associated channelling equipment.

The effort required to design an equipment which is consistent, reliable and easy to maintain precludes the possibility of a wide variety of designs. Standardization increases the scale of production permitting more efficient production methods, lower costs and at the same time, maintenance in the field is simplified. The system to be described, apart

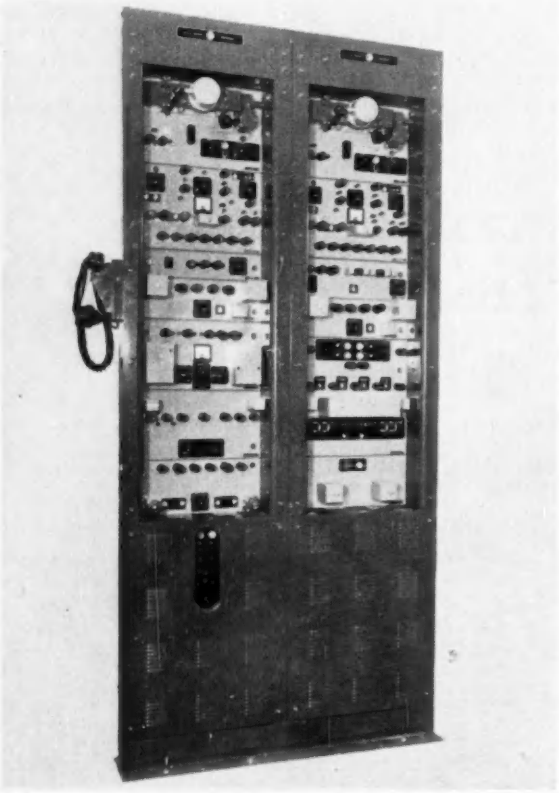

Fig. 1. Typical s.h.f. terminal equipment

from conforming to mechanical standards established for this type of equipment, has a considerable degree of uniformity within itself.

Frequency Considerations

For many years the demand for radio links has been fairly well satisfied by a series of v.h.f. equipments, particularly in less developed areas. A situation has now been reached in many territories where difficulty is experienced in allocating frequencies for new systems to cope with traffic expansion and likewise the congestion of the v.h.f. band has precluded the setting up of wide band trunk systems. Also at some densely populated terminals the level of static is too high to allow the desired signal-to-noise ratio to be achieved.

To make use of a wider and less exploited part of the spectrum a system of toll quality in the allocated band of 3 900Mc/s to 4 800Mc/s is appropriate. At these frequencies, the level of interference is very low, but visual paths between stations are required in view of the high attenuation which results from even small obstructions. Fading in this band is generally more pronounced than at v.h.f. particularly over water where ducting and surface reflection can drastically modify the free-space conditions. At the same time, the Fresnel zone clearance is much smaller and the elevation above ground level to give free-space conditions is correspondingly reduced.

A Typical System

A terminal of a typical equipment fulfilling this need is illustrated in Fig. 1. This particular system has a capacity of one supergroup of sixty standard 4kc/s channels with a satisfactory performance over ten hops, totalling about three hundred miles.

TRANSMITTER DESIGN

Owing to the difficulty in providing amplification at these frequencies, a coaxial velocity-modulated valve oscillator,

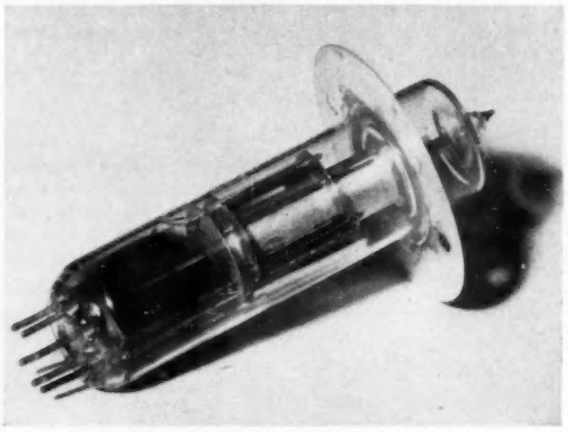

Fig. 2. Heil tube suitable for use at 4 000Mc/s

capable of direct frequency-modulation is used, giving an output in excess of half a watt. This provides an adequate system performance when used with 4ft diameter parabolic aerials or their equivalent having a power gain of about a thousand-fold.

The acceptance of a group, or super-group, of carrier telephone channels restricts the designer to the use of amplitude or frequency-modulation. The advantages of the latter are well known, and for 60 channels the recommended C.C.I.R. channel deviation of 200kc/s r.m.s. is adequate.

The transmission of multi-channel information requires an extremely linear modulation characteristic to avoid cross-talk between channels. Although the velocity-modulated oscillator is inherently fairly linear, an oscillator when coupled to a long transmission line which is not terminated by a purely resistive load is affected by the phase of the mismatch. Since it is impossible to design a feeder and aerial with such a characteristic over a wide frequency band and maintain it so under varying weather conditions, a directly modulated system is not satisfactory.

A suitable valve for this application is a Heil tube, which consists of a short-circuited coaxial line from which the inner projects to form a radiator (Fig. 2). A slot is cut along the axis. Through both the outer and inner conductors. A cathode and grid assembly is placed at one side of the slot and an anode at the other, so that a flat beam of electrons, focused by a magnet, is passed through the coaxial assembly (see Fig. 3).

The potentials are arranged so that the electrons are accelerated in the space between the cathode and resonator.

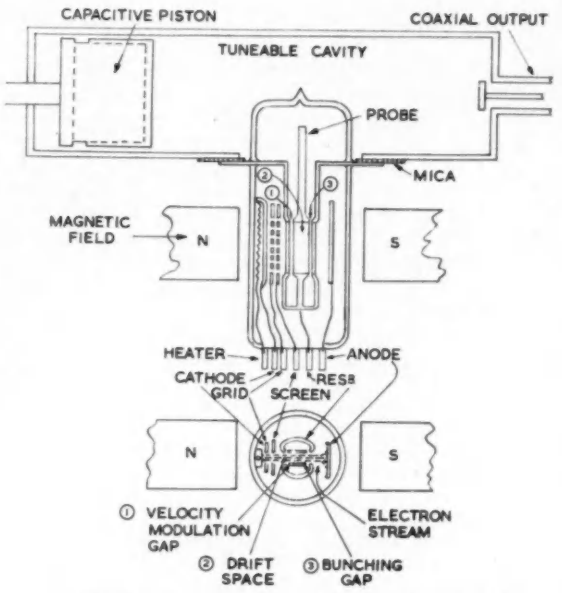

Fig. 3. Diagrammatic representation of velocity-modulated oscillator

The inner line is thick enough to act as a constant potential drift space, equivalent in this case to nine quarter-wavelengths at the operating frequency, allowing electrons with varying velocities in the first gap to bunch before entering the second gap where energy is transferred from the beam to the coaxial line. Some of this energy is expended in modulating the electron velocity in the first gap, maintaining oscillation, while the remainder is radiated from the inner conductor. This is coupled to a tuneable resonator enabling the natural resonance of the system to be controlled and the power coupled into the load to be adjusted. To obtain the maximum output the electron beam voltage must be adjusted so that the bunches arrive in synchronism with the natural resonance of the system. If then the resonator potential is modulated the rate of arrival of the bunches is varied and the frequency of oscillation varied in sympathy.

The greater the amount of energy transferred to the load, that is the lower the Q of the tuned circuit, the greater the change of frequency for a given voltage change; excessive load will, however, prevent oscillation. To achieve the desired isolation of the oscillator characteristics, modulation is applied indirectly in a manner shown in Fig. 4. A frequency modulated oscillator operating at approximately 20Mc/s drives a series of frequency multipliers to give a final frequency of approximately 180Mc/s. The output is injected into a silicon diode mounted in a section of waveguide which generates a band of harmonics, some of which propagate along the guide. One of these is heterodyned by the microwave oscillator to produce a 70Mc/s intermediate frequency which is amplified and demodulated, reproducing the original signal used to modulate the 20Mc/s oscillator. This output is applied to the resonator of the microwave oscillator in the correct phase to cause its frequency to deviate in sympathy with that of the harmonic selected. As the final deviation of the transmitted carrier is 200kc/s per channel and the selected harmonic is approximately two hundred times the frequency of the 20Mc/s oscillator the deviation is multiplied proportionately; the basic oscillator therefore is deviated only 1kc/s per channel and is extremely linear. The mid-frequency of the oscillator is stabilized against a quartz crystal so that the harmonic is virtually crystal controlled and has a very linear modulation characteristic.

The microwave oscillator, i.f. amplifier, and discriminator form a closed loop with the characteristics of an amplifier with negative feedback. Analysis will show that depending on the gain of this loop, the deviation of the signal in the i.f. amplifier will be decreased and any non-linearity of the modulation characteristic of the oscillator will also be reduced. In a typical system 20dB of feedback is applied, reducing the deviation in the i.f. amplifier to 20kc/s per channel. The resultant deviation of the oscillator is thus 180kc/s, and is obtained with a 20dB improvement in linearity.

In order to maintain the correct phase within the feedback loop over the wide operating band necessary to accommodate the 60 channel signal (300c/s to 320kc/s) a shaping amplifier is incorporated between the discriminator output and the resonator electrode of the oscillator. If now the transmitter is connected to the aerial, any reactance coupled into the oscillator cavity, which would cause non-linearity, is reduced by the feedback factor of 20dB.

Since the discriminator is tuned to 70Mc/s any departure of the oscillator from the frequency of the harmonic ±70Mc/s will produce a d.c. output proportional to the frequency error. This is applied to a servomechanism which corrects the oscillator frequency, tuning the cavity mechanically and maintaining the resonator voltage at the optimum

Fig. 4. (a) Transmitter

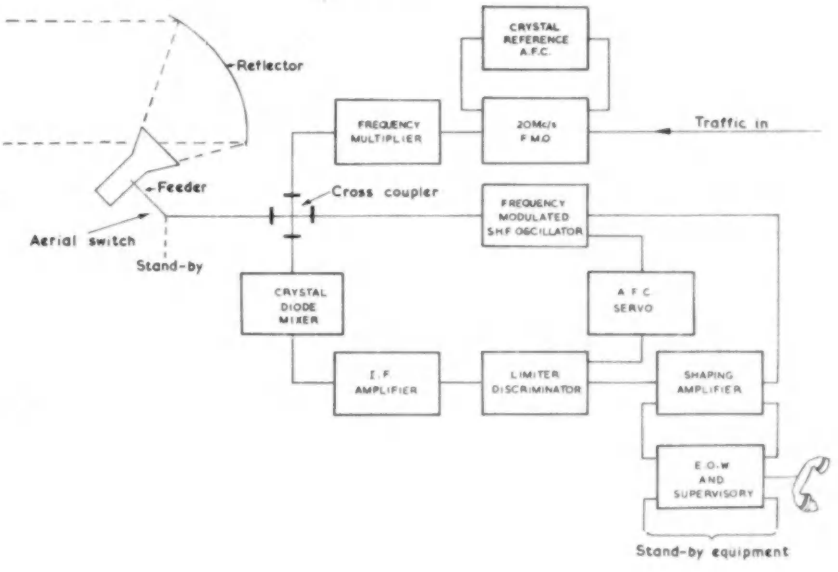

value. In effect the microwave oscillator is crystal controlled and has a highly linear modulation characteristic.

It is still necessary in some cases to use aerials elevated by a considerable amount in order to clear path obstructions. To retain a reasonable length of feeder, these circumstances may be met by mounting the aerial at the base of the tower, directed vertically with a plain reflector at the top at 45°.

The apparent complexity of the transmitter, besides achieving the necessary characteristics, effects a considerable simplification of the system as a whole.

Receiver Design

The receiver is similar to the transmitter except that the signal received from the aerial is fed into the mixer in place of the harmonic of the modulated oscillator, which is absent. The same feedback principle is involved, but the oscillator output is absorbed in a load. The feedback is retained to reduce the distortion in the i.f. amplifier and discriminator, the output from which is fed to line or carrier equipment through an amplifier. The oscillator frequency is locked to that of the incoming signal by a similar servomechanism.

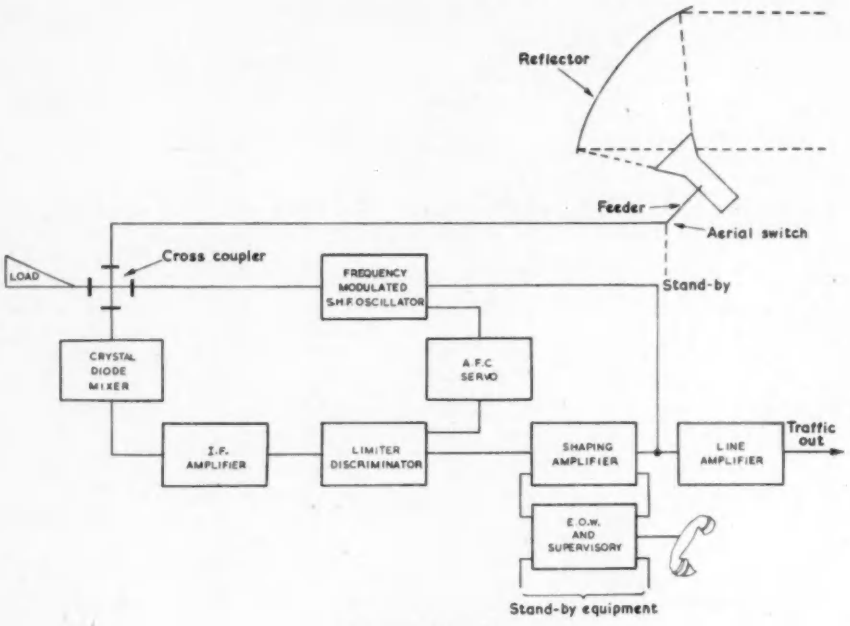

Fig. 4. (b) Receiver

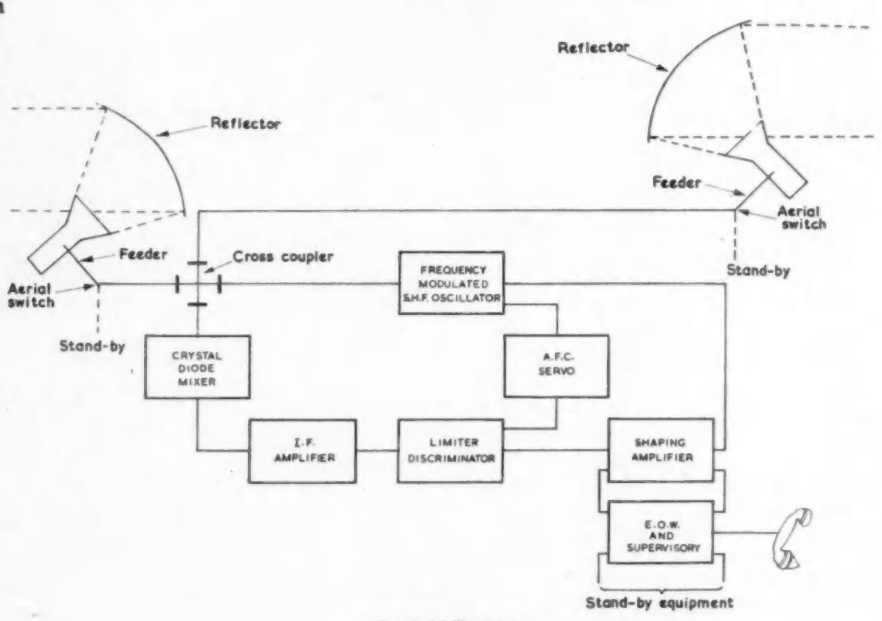

Fig. 4. (c) Repeater

Repeater Design

It will be obvious that if the receiver oscillator is fed into an aerial instead of the load, it will radiate a signal in a similar manner to the transmitter. It thus becomes both receiver and transmitter, serving as a non-demodulating repeater. The use of a simple repeater design imposes a number of system limitations, but these are not important in practice for a toll system of the kind being described. In such a repeater, the transmitter frequency will be removed by 70Mc/s from that of the incoming signal. As with the transmitter 99 per cent of the output from the oscillator is available for transmission.

The deviation is reduced by 10 per cent in the feedback process, representing a loss of 1dB. In consequence, it is normal practice to utilize back-to-back terminals, at about every fifth station, to restore the modulation index. These may be conveniently located at a traffic centre where access to the modulation is anyway necessary. Systems carrying less than the maximum can, of course, be extended further since there is an adequate performance margin, a 24 channel system for instance has at least a 6dB reduction in channel noise over the top channel in a 60 channel system.

This principle of overall feedback not only provides an elegant method of reducing distortion but greatly simplifies the repeater station. It also results in a design which utilizes the same basic units in the terminal transmitter, receiver and repeater, greatly simplifying maintenance (see Fig. 4). The last feature is particularly attractive since relatively

few panels are required to provide spares for a complete system.

The terminal transmitter and receiver are each accommodated on a standard 7ft 6in rack. A two-way repeater, consisting essentially of two receiver racks (but without line amplifiers) is also accommodated on two racks.

Reliability

The design of an equipment must not only provide a solution to the technical problems but also ensure that each product provides the same minimum performance for a long period with as little skilled maintenance as possible.

The larger capacity systems are so important that some form of insurance against failure is required. The circuit may fail for a number of reasons, the two basic causes being the loss of signal due to abnormal propagation conditions, and equipment failure. To some extent the system may be designed and planned to allow for loss of signal due to propagation effects so that the interruption of the circuits is reduced to an acceptable percentage of the time. An equipment failure, particularly at an unattended station may interrupt vital communications, cause loss of revenue and generally detract from the standard of service required. Trunk systems may warrant the provision of a complete spare active path with standby power supplies providing a 'twin-path' system ensuring continuity save in the event of simultaneous faults on both paths.

An alternative, and generally preferable, arrangement, is the 'quiescent standby' system, which provides alternative equipment at each station which is automatically brought into service in the case of failure. It has the advantage that a fault may develop at each station without permanent interruption of the circuit. The 'twin-path' system obviously requires a duplication of frequency allocations since both are permanently operative. With a 'quiescent standby' system the operational and standby equipments must work one to the other and therefore on a common frequency.

The usual method of operating quiescent standby is to remove the drive from the standby transmitter, and monitor the outputs of both receivers. Failure of the operational receiver switches on the standby transmitter. (An ambiguity exists unless both receivers are monitored since failure of the received signal may be due to a fault in the receiver, a fault in the preceding transmitter, or a deep fade. These difficulties may be overcome by a system of delayed switching to avoid unnecessary changeover, but results in significant delay in restoring the circuit where a number of repeaters are involved).

Since with this equipment a common oscillator is used at repeater stations to serve as local oscillator and transmitter, this arrangement is not suitable. However, a particularly simple solution has been found.

The signal from the receiving aerial is fed directly through a waveguide or coaxial switch to the operational repeater and through a similar switch to the transmitting aerial. A little of the signal is also fed into the standby repeater which is maintained fully active, except that the voltage on the v.m. oscillator is modified to prevent oscillation. As soon as the signal received by the operational repeater falls below a specified level, the standby oscillator is brought into operation. The signal received by the standby repeater is normally lower since it is coupled to the aerial through an attenuator, so that a fade, or failure of the previous transmitter does not cause a changeover. If, however, the standby repeater receives a signal of higher level than that indicated by the operational equipment, the aerial switches are changed over and the faulty equipment switched to the quiescent condition. In the event of power failure the two equipments are switched on when power is restored but the operational repeater takes precedence. This arrangement provides the maximum reliability against failure with a very short changeover time and a low incidence of unnecessary switching.

Provision of a standby equipment is not sufficient in itself. Unless a changeover at an unattended repeater is notified to the control terminal the faulty equipment may be left unrepaired. Consequently, fault indications are transmitted as tones over the engineer's order wire which provides party-line communication between all stations. The order wire occupies a band from 300c/s to 3kc/s and the supervisory tones are located immediately above it.

Two other facilities which have been found desirable as a result of long experience are also available. They are the 'revertive check' and 'turn round' operation. The former switches all stations to 'operational' to check that this path is free from fault or that a changeover has occurred in error. The turn-round facility enables the terminal and each repeater to be checked in turn. An oscillator is used which has a frequency equal to the difference between the transmitted and received signal frequencies, and a little of the transmitted signal is coupled from the aerial feeder into a crystal mixer, together with the output from the turn-round oscillator. The combined frequency is accepted by the receiver, to which it is loosely coupled, thus enabling the terminal to be checked as an entity. The normal circuit tests include signal-to-noise ratio, intermodulation and test-tone levels. At the terminal the turn-round oscillator is manually switched and is normally off. In order to perform the loop test on the first repeater, a characteristic control tone is transmitted which brings the t.r. oscillator into action and likewise each repeater may be turned round from either terminal. Failure of the signal to return identifies the faulty station, while excessive noise or crosstalk may also be located. Rapid identification of a faulty station is very important particularly when both equipments are affected, since the outage time may be governed by the time taken in travelling to the station. Its location enables the maintenance engineer most favourably situated to deal with the trouble. (It is worth noting that a single channel may have a revenue value of several pounds per hour and the loss of sixty channels in a peak period is of some consequence.)

Among other design aspects one must include safety precautions to protect both the equipment and personnel; component identification and layout to facilitate maintenance; quality of components, materials and finishes to prevent deterioration in adverse climatic conditions. The use of s.h.f. techniques introduces a further problem of mechanical accuracy. Many component designs which are otherwise satisfactory require an accuracy of manufacture which is difficult to achieve. The accurate reproduction of complex shapes in high conductivity metals gives scope for the development of new processes. Shell-moulding, precision casting, electro-forming and high-speed precision routing are some of the commonly used methods to avoid expensive and skilled machining operations.

System Performance

The quality of manufacture in many cases can only be confirmed by electrical test. Measurements of a high order of accuracy which initially present a problem in the laboratory must be repeated accurately and quickly in production testing. The design of test equipment and the carrying out of fundamental measurements may involve as much effort as the design of the equipment itself.

Tropospheric Scatter Communication

By G. L. Grisdale*, Ph.D.

By using high-power transmitters, large aerials and sensitive receivers, it is possible to achieve satisfactory multi-channel communication far beyond line-of-sight range. The received signal is characterized by very rapid fading, the effects of which are reduced by using diversity systems. The article reviews the main features of tropospheric scatter communication.

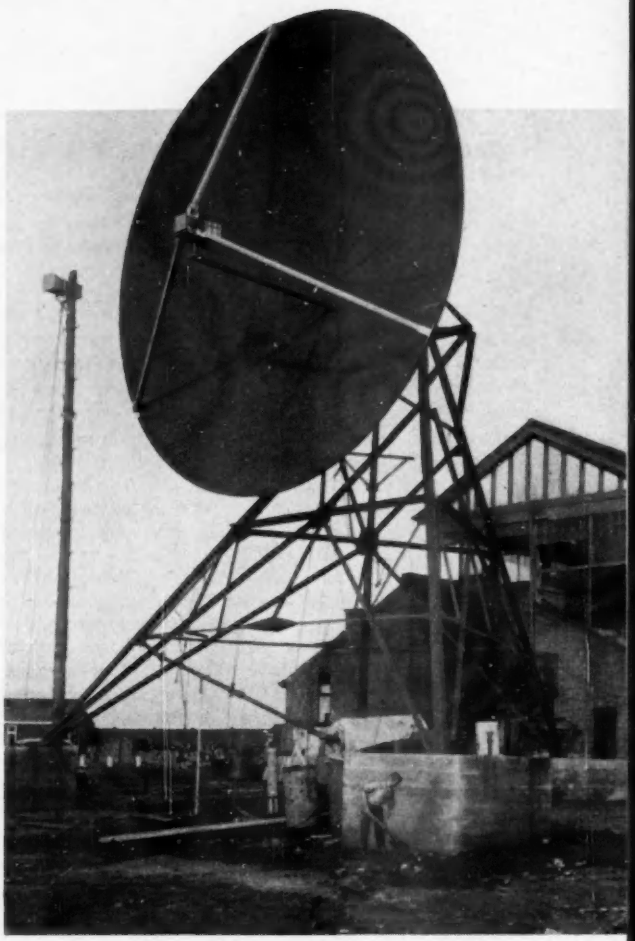

The illustration above shows a 30ft aerial for tropospheric scatter transmission

RADIO communication at frequencies above 100Mc/s has usually been confined to transmission paths in which the transmitter and receiver are within sight of each other. Under these conditions quite low powers can provide high-quality transmissions with large modulation-frequency bands for multi-channel telephony, television and radar links. Signal strength fluctuation is not normally a problem if the aerials are carefully sited. The signal in line-of-sight links is normally reliable and steady. When the distance between transmitter and receiver is increased beyond the line-of-sight limit, the signal rapidly becomes weaker, although at the lower frequencies in the v.h.f. and u.h.f. bands the diffraction of waves round the curvature of the earth or over terrain obstructions can provide useful communication with increased transmitter powers. The lower curve of Fig. 1 shows the calculated increase in attenuation with distance for a 3 000Mc/s signal diffracted over a smooth earth.

It has been found that the signals are received at greater strength than would be given by diffraction theory and the points on Fig. 1 show the results of experimental observations made in the United States by Bullington[1]. The measured signal strengths have been plotted in comparison with the signal strength which would be obtained with the same transmitted power and aerial systems in free-space. The signal strength is sufficient for useful communication over paths up to two or three hundred miles, provided that powerful transmitters are used with large aerial systems. It may be necessary to limit the bandwidth transmitted in accordance with the economics of the system.

* *Marconi's Wireless Telegraph Co. Ltd.*

Propagation Mechanism

The mechanism by which these useful signals are transmitted is called tropospheric scatter. The physical properties of the air do not vary in a smooth and continuous way; there are variations of dielectric constant with height in the form of blobs or layers having values different from the average around that height. When a radio wave, having a sufficiently short wavelength compared with the size of the discontinuity, is sent through the atmosphere, most of the wave energy continues in its original direction, but some is scattered in different directions, in the same way that the blue part of the sun's light is scattered by the atmosphere to make the sky appear blue instead of inky black.

The angle between the direction of the original ray and that of the scattered ray is called the scatter angle; the smaller the scatter angle the more intense is the scattered radiation.

Fig. 2 is an exaggerated picture of a section through the earth, showing a transmitter T and a receiver R, both fitted with high gain aerials pointing at each other, giving narrow beams, the lower edges of which are cut off by high ground. The beams are directed as low as the terrain allows, so that the scatter angle is kept as small as possible, not usually greater than two or three degrees. Where the transmitter and receiver aerial beams intersect, there is a volume of air which acts as the 'scatter volume'; different parts of the scatter volume contribute to the scattered wave, so that the received energy consists of many components which have travelled slightly different distances. This means that

the signal is not of constant strength, as in line-of-sight links, but fades in the same way as long-distance h.f. signals transmitted through different paths in the ionosphere. The fading of tropospheric scatter signals is, however, usually more rapid than that of h.f. signals.

Even with high-power transmitters and large aerials the signal is nearly always weaker than that which is considered necessary for commercial line-of-sight links, and there are two kinds of fading to be taken into account. The 'long-term' fading is the variation of signal strength due to changes in the general condition of the propagation path at different times of the year and day. Provision must be made for the lowest signal strength that is likely to be received, and a usual criterion is that the signal should not be weaker than the lowest acceptable level for more than 1 per cent of the total hours. The long-term fading allowance at 1 000Mc/s for a 200 mile path is about 10dB, compared with the median long-term signal.

In addition to the slow change of signal strength, there is also rapid fading due to the arrival at the receiving aerial of waves from all parts of the scatter volume; these component waves have a range of amplitudes, and their phase relationship is random. They combine to give an output from the receiving aerial which fluctuates; sometimes short, deep fades occur less than a second apart[2]. The characteristic time of this fading may be as short as 0·1sec, and is normally much more rapid than the fading of long-distance h.f. signals. Short-term fading does not necessarily occur simultaneously at aerials spaced a short distance apart, so that spaced-aerial diversity may be used to reduce the time during which the output fades. The spacing of aerials to achieve independent fading is usually taken as one hundred wavelengths, which is not great at frequencies in the u.h.f. band. The distance between aerials and the transmitter and receiver building should be as short as possible to reduce feeder-losses and cost, so that the spacing of aerials for diversity reception should be the minimum that gives independent fading in the two receiving aerials.

Another characteristic of the short-term fading is that if signals are received using the same transmitting and receiving aerials at two different frequencies, the two signals do not always fade simultaneously. This provides the possibility of frequency diversity, if economics and the demands for frequency allocations permit; it also limits the maximum modulation frequency that can be used, for if the whole transmitted frequency band does not fade simultaneously there will be serious distortion of the modulation; this distortion is only too well known with telephony in the h.f. band.

The bandwidth that can be transmitted over a link is determined by the difference in distance between the longest and shortest tracks which transmit energy through the scatter volume; the greater the effective scatter volume, the greater the path differences between different components of the wave and the narrower the band of frequencies which can be transmitted without distortion. If bandwidth is a vital consideration, the effective scatter volume can be reduced by narrowing the aerial beam so that only the most effective part of the scatter volume is illuminated; parabolic dishes of 60ft diameter are already in use, and 120ft dishes have been proposed. The selective fading effect is not at present a serious limitation for multi-channel telephony, but it might cause difficulty if a television relay system were to be considered.

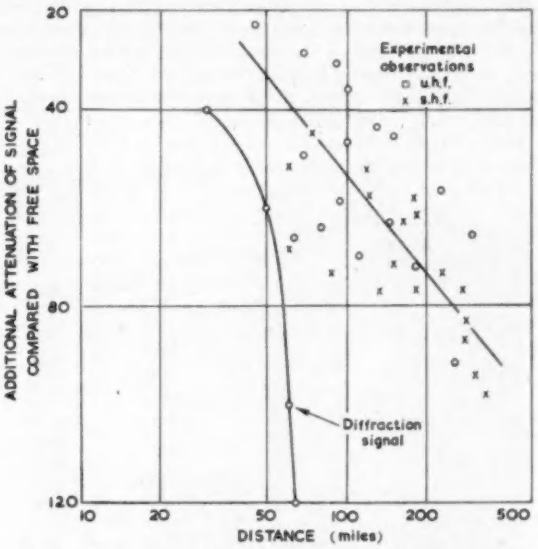

Fig. 1. Calculated and observed curves of attenuation with distance

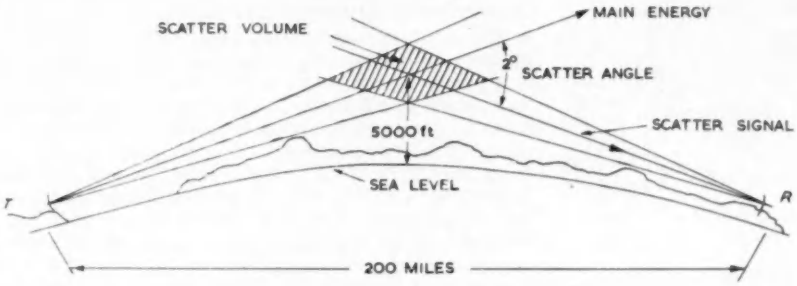

Fig. 2. Geometry of a 200 mile tropospheric scatter circuit

An interesting feature of tropospheric scatter transmission is that the polarization of the signal is preserved, that is, a signal transmitted on a horizontal aerial will not have a vertical component even after passing through the scatter mechanism; this means that polarization diversity reception, which can be used with similar signals in the h.f. band, is of no value with tropospheric scatter communication. The property is used in some diversity systems to attain quadruple diversity with only two aerials at each terminal[3].

The frequency band in which tropospheric scatter is effective extends from 400Mc/s upwards, certainly beyond 5 000Mc/s; at lower frequencies the effect is often masked by other propagation mechanisms. In this range, assuming that the transmitter power and the size of the aerials are kept constant, there is not much variation of performance. The choice of frequency therefore hinges upon the allocation of frequencies by the Administration concerned and the availability of suitable components, notably large trans-

mitting valves. Large multi-cavity klystrons were produced for Band V television, and these have found a welcome outlet for tropospheric scatter transmission. Such a klystron can provide 10kW output at an efficiency of about 40 per cent, and can be adjusted to give a bandwidth wide enough for multi-channel telephony, and even a television link. Fig. 3 shows a 10kW transmitter for tropospheric scatter communication, with the power klystron withdrawn. The fact that the external cavities are designed round the valve leads to a clean assembly. The klystron has high gain, only 10W driving power being required for 10kW output. The input/output characteristic is linear almost to the full output.

Fig. 3. 10kW tropospheric scatter transmitter

Aerials

The preferred aerials are parabolic reflectors, illuminated by a dipole with a reflector, or a horn radiator. The diameter of dish to give the required gain may be up to 60ft, and the 30ft diameter has become a widely accepted size. Such aerials must be built to stand over an inch of ice coating and gales up to 100 miles/h, and represent a considerable fraction of the total cost of the installation. The surface must have the correct profile to within about 1/16 wavelength, which at 4 000Mc/s gives a tolerance of $\pm\frac{1}{4}$in. A dual diversity system needs two receiving aerials at each end, and these can also serve as transmitting aerials. It is becoming usual to employ two transmitters and four receivers at each terminal to give quadruple diversity with only two aerials; a number of different arrangements is possible, and reliability is improved by using several equipments.

The photograph on page 272 shows such an aerial used for a prototype link; steel has been used throughout the construction, the surface of the dish being sheet metal. The twelve sectors of the dish are assembled on site, the 4 ton dish being then raised on to its gantry. Small angular adjustments are provided in azimuth and elevation. The aerial is fed by a horn with two probes to excite mutually perpendicular polarizations, the probes being adjusted to give the lowest coupling between them, thus protecting the receiver from the high transmitter power. The transmitter feeder for 10kW up to 1 000Mc/s is $3\frac{1}{8}$in coaxial, and the problem of adjusting the feeder over a band of frequencies is formidable. Waveguide could be used if available in the large size needed, but in any case the cost of transmitter feeder is considerable. The receiver feeder in this case has $1\frac{5}{8}$in outside diameter.

Other kinds of aerials are possible at the low-frequency end of the band, but for the most part a high-gain array, such as a group of Yagis, would need so many elements that feeding them would be difficult. Some form of large sheet reflector, such as the parabola, is almost certain to be adopted, but there are possibilities of shaping the side of the building which houses the transmitter to provide the aerial 'dish', or of making the gantry into a building for equipment, which comes to much the same thing.

The effective height of the aerial depends upon the contour of the ground in front of the aerial, and the profile of the terrain along the route must be examined carefully to ascertain that no obstruction causes a serious increase of the scatter angle, and thus adds attenuation to the transmission. The curvature of the earth helps to keep elevated obstructions below the horizon as distance is increased; at 20 miles the curvature drops the effective height by 200ft. which may be significant in fairly flat countries. Raising the aerial to very high ground reduces the scatter angle and gives better transmission, and with a carefully chosen site the aerial can sit with its lower edge on the ground. Many investigations have been made into the calculation of signal strengths over given paths[4] and it is now possible to predict the results over a given terrain with some certainty[2].

Application of Tropospheric Scatter

The most important application of tropospheric scatter transmission is to replace multi-channel v.h.f., u.h.f. and microwave links in cases where intermediate repeater stations cannot be used. The defence network in Northern Canada uses tropospheric scatter communication from very inaccessible sites and where low temperatures exist for a large part of the year. Other possible applications are for links between islands, where it is impossible to erect repeater stations in the sea. The Texas Tower radar installations off the coast of the United States are linked to the mainland by such communication. It has been suggested that Europe and America could be linked by a series of island-to-island hops using tropospheric scatter communication, and that such a link could carry television pictures; calculation shows that such a system would not provide very high quality pictures over this route.

Multi-channel telephony is normally handled in the same way as for low-power microwave links, that is, the speech channels are arranged by frequency changing processes into groups of twelve channels spaced 4kc/s apart, each group occupying a spectrum 48kc/s wide. Thus, if it is desired to transmit 36 telephone channels, they would be converted to single-sideband signals between 12kc/s and 156kc/s, the lower three groups of twelve channels each. This base-band is then regarded as the modulation band for the transmitter, which up to the present has used frequency modulation.

The deviation to be used for the f.m. signal takes account of the fact that the signal fades for instants to a very low level, which does not normally occur for line-of-sight links. During these fades the signal is less than the noise in the receiver, i.e. below the threshold level at which the limiter of the receiver can be effective in reducing noise. Under these conditions short intense bursts of noise are produced in the receiver when the deep fades occur, lasting perhaps 0·1sec. The frequency-modulated tropospheric scatter links

have this impulsive type of noise, rather than the smoother noise associated with amplitude-modulated or single-sideband signals.

For an f.m. receiver of given gain the noise power level at the limiter will be proportional to the bandwidth, whereas the average signal level will be independent of bandwidth. For a wideband receiver, to accommodate a large deviation, the signal falls below threshold level more often than in a narrow band receiver and the noise bursts in the output are longer and more powerful. From this point of view the deviation should be as small as possible; however, when the signal is above threshold (most of the time) the signal-to-noise ratio is proportional to deviation. A compromise must be made between the conflicting demands. In general the system parameters are chosen so that the signal does not fall below noise for more than one per cent of the time; this limits the receiver bandwidth and thus the deviation. For a typical 200 mile link, carrying 24 channels, the deviation was 60kc/s for test-tone level in one channel, giving r.m.s. deviation for 24 channels of about 150kc/s; the i.f. bandwidth was 800kc/s, somewhat narrower than it would be for line-of-sight links.

An alternative to frequency-modulation for tropospheric scatter links is single-sideband modulation. The system is essentially the same as that used for h.f. communication, except that there could be many more than the four speech channels which are the maximum for h.f. It has not yet been established whether s.s.b. gives superior results to f.m.; the character of the output noise is different with s.s.b. the noise surges being less spiky, and it is possible that s.s.b. will give better results when signal strength is low. It is likely that many f.m. links will be established before the relative advantages of the systems are resolved.

The standard of signal-to-noise ratio demanded of line-of-sight links is extremely high, and not many tropospheric scatter links over useful distances will achieve this perfection. However, a very satisfactory practical standard is possible and this is achieved by attention to every aspect of the system which can give an improvement to the signal. Receivers in the 600 to 1 000Mc/s band can have 7 to 10dB noise factor; an improvement of 3dB in sensitivity at the receiver is more significant when it is considered as equivalent to doubling the transmitter power output. Again, increasing the transmitting and receiving aerials from 10ft to 30ft diameter is equivalent to increasing the transmitter power by up to 80 times. The improvement by using diversity depends upon the quality of service of the individual channel; the better the performance of the single path, the more the improvement by using two or more paths in diversity. The improvement in signal by changing from double to quadruple diversity is less than that obtained in changing from one path to two paths, but quadruple diversity is likely to become the standard system for high performance links of high reliability.

In tropospheric scatter diversity receivers, the detected outputs of the receivers (at baseband frequency) are applied to a combining unit which adds them together, taking a greater contribution from the receiver which has, for the moment, the greatest signal-to-noise ratio. It has been shown that this form of combining gives a better signal-to-noise ratio in the combined output, than would be obtained by simple switching to the best signal. The improvement results from the fact that in tropospheric scatter links there is no phase difference between the modulation waveforms delivered at the outputs of the diversity receivers, whereas the noise outputs are random and unrelated. With dual diversity the maximum improvement from this form of signal combining is 3dB when the signals in the two channels are equal.

10kW transmitters and 30ft diameter aerials have been mentioned for ranges up to 200 miles. At half this distance, and with the same aerials and receivers, the signal strength would be about 20dB higher, and 100W transmitters could give the same service. Alternatively the size of the dishes could be reduced to about 15ft and the transmitter to 1kW. On the other hand, if ranges much greater than 200 miles are to be covered, the standard of communication would fall off with the powers and aerials now available. Narrow band telegraph circuits have been maintained at distances up to 600 miles.

Conclusion

The first applications for tropospheric scatter communication will certainly be concerned with situations in which the terrain rules out multi-hop microwave links. Tropospheric scatter can give reliable communication, but due to the fluctuating nature of the signal and the limited signal strength over the longer distances the quality of the communication cannot compare with properly engineered line-of-sight links. It is estimated that the cost of a tropospheric scatter link will not be far from the cost of a multi-hop link using v.h.f. or u.h.f., the number of channels being limited. The large cost of high power transmitters, large aerials and diversity receivers is off-set by the number of installations in the multi-hop link. The main interest in tropospheric scatter systems has, up to now, come from the Service organizations, but there can be little doubt that their value in commercial operations will soon be proved.

Acknowledgments

Thanks are due to the Engineer-in-Chief of Marconi's Wireless Telegraph Company for permission to publish this article.

REFERENCES

1. BULLINGTON, K. Radio Transmission Beyond the Horizon in the 40-4000Mc/s Band. *Proc. Inst. Radio Engrs. 41*, 132 (1953).
2. RIDER, G. C. Some Tropospheric Scatter Propagation Measurements and Tests of Aerial Siting Conditions at 858Mc/s. *Proc. Instn. Elect. Engrs.*, Paper 2528R (1958).
3. LONG, W. G., WEEKS, R. R. Quadruple-Diversity Tropospheric Scatter System. *Trans. I.R.E. Communications Systems*, p. 8 (1957).
4. NORTON, K. A., RICE, P. L., VOGLER, L. E. The Use of Angular Distance in Estimating Transmission Loss and Fading Range for Propagation Through a Turbulent Atmosphere over Irregular Terrain. *Proc. Inst. Radio Engrs. 43*, 1488 (1955).

British Television Equipment for Yugoslavia

The Yugoslavian Broadcasting Authorities have ordered from Britain a considerable quantity of equipment for the establishment of a television link between Belgrade and Ljubljana, an overall distance of 569km.

Marconi's Wireless Telegraph Company Ltd are to supply this link, together with an ATE-Marconi engineering order wire system. The approximate value of the contract is £51 000.

The television link has two features of particular technical interest. Working on u.h.f. (in the 1 700 to 2 300Mc/s range) it employs an all-travelling-wave tube technique both in the terminal and repeater stations; the wide band provided by travelling-wave tube amplifiers enables a high-definition television signal to be accommodated, together with its associated sound channel. In this instance the sound channel is conveyed on a pilot carrier inserted above the vision base-band.

The installation, which will include four Marconi Type HM200 terminal equipments and two Type HM250 repeater units, will be routed from Avala (the television transmitting station near Belgrade) via Crveni Cot, Ozren, Psunj, Sljeme (near Zagreb) to Krvavec (Ljubljana). Terminal units are to be provided at two of the intermediate points—Crveni Cot and Sljeme (the latter covering Zagreb)—in order that the vision and sound signals can be extracted at these points if required. Additionally, facilities will exist at Sljeme for inserting programmes originating at Zagreb. These can be transmitted via the link to Belgrade and Ljubljana simultaneously or to either one at will.

S.H.F. Radio Links Using Travelling-Wave Output Amplifiers

By G. Dawson*, B.Sc., M.I.E.E., and T. K. M. Korytko*, B.Sc., A.M.I.E.E.

This article discusses the problems that have arisen in the planning and installation of broad-band s.h.f. radio links in many different countries during the past six years. It describes the techniques which have been evolved in the design of the s.h.f. equipment and the associated supervisory and switching equipment in order to provide transmission circuits to the international standards recommended by the C.C.I.R.

IT is now over six years since the first wideband radio relay system using travelling-wave amplifiers was put into service for television transmission between Manchester in England and Kirk O'Shotts in Scotland, and during this period considerable experience has been gained of the planning, installation and operation of this type of system and further developments have taken place in the design.

It may be of some value to review the experience derived from these systems installed in many different countries, to consider some of the practical problems encountered and to discuss the latest type of equipment and probable future trends in the design.

The travelling-wave tube was invented during the war by Kompfner[1] at Birmingham University and developed at the Clarendon Laboratories, Oxford. It was developed by Rogers[2] into a reliable s.h.f. power amplifier for use in the Manchester-Kirk O'Shotts radio link[3] in 1952. The 4 000Mc/s band was chosen for its initial application from the possible alternatives of 2 000 or 4 000Mc/s allocated for fixed point-to-point wideband radio links, as compact and high-performance waveguide structures and aerials could be used, and the use of this higher frequency band offered the best promise for future expansion of the transmission capacity of radio link systems with the valve techniques then available. This choice has been endorsed by the general trend throughout the world for the large capacity systems to use the 4 000Mc/s band[4,5] (although in the future it is anticipated that the 6 000Mc/s band[6] may be used for even larger capacity systems) and also by the extended use of the travelling-wave tube as the output amplifier in s.h.f. radio relay systems.

The Manchester-Kirk O'Shotts radio link was designed for the two-way transmission of 405 line monochrome television signals only, but the interplay of laboratory developments and field experience has now produced an equipment design which is capable of providing up to six two-way radio channels on a single route in the frequency band 3 800 to 4 200Mc/s, each radio channel being capable of transmitting either 600 telephony channels or a 405, 525 or 625 line monochrome television signal (with the possibility of adaptation for colour) to the international transmission standard of the C.C.I.R. This extension of the technique has only been made possible by intensive laboratory development and close co-operation between the radio link designers and the Administrations who operate the systems.

Frequency modulation is used in all the radio link systems mentioned in this article and the radio repeater design is based on the principle of amplification at intermediate-frequency with reconversion to s.h.f. and the use of a travelling-wave amplifier to deliver the final output power. With the extended development of the travelling-wave valve it is now possible to design a repeater with all the amplification at s.h.f., but there are good reasons, which will be detailed later, for the retention of the present arrangement. It is interesting to note that the recently described Bell TH system intended to carry at least 1 860 channels of telephony employs amplification at 74·1Mc/s followed by a travelling-wave amplifier as a power output stage.

The successful provision and operation of a radio relay system depends upon the transmission performance, the reliability and the cost in both time and money; all of which are to some extent inter-related.

Satisfactory transmission performance, for which the targets are defined by the C.C.I.R, depends not only upon the equipment design but also upon the route planning and the successful choice of suitable sites for the radio stations, and some of the problems which arise are discussed below.

Generally speaking, propagation planning, including good Fresnel zone clearance, a good immediate foreground and a suitable angle between the directions of transmission tends to dominate the selection of sites, but the problems of acquiring the site, accessibility and building construction must also be considered.

In Britain up to fifteen different authorities may have to be consulted before final permission is granted to build a station; even then special action may be necessary as at Blackford Hill on the Manchester-Edinburgh system where the station building was concealed behind the summit of a hill in order to hide it from public view.

On the Madrid-Sevilla 240 channel telephone link similar aesthetic considerations influenced the siting of the aerials on the roof of the Telephone Building at Madrid.

As in the nature of things better clearances and longer hops are obtained by going as high as possible in a hilly terrain, accessibility may become a severe problem. Repeater sites, like Koralpe (2 100 metres) on the Graz-Klagenfurt system in Austria, may become inaccessible in the winter. The position of the sites on the Cabot Strait crossing between Nova Scotia and Newfoundland was influenced by similar considerations.

It is all the more important, therefore, if a compromise has to be accepted, to assess clearly what the choice of an inferior site entails in terms of system performance, and this is no simple matter.

It was noticed on two early systems, Manchester-Kirk O'Shotts and Johannesburg-Pretoria, that excessive s.h.f. coupling could occur between the two directions of transmission, if, as was desirable for reasons of economy of spectrum, the operating frequencies were the same.

The aerials were placed horizontally side-by-side in those days, with one transmit and one receive aerial per direction. It was found that some excessive coupling was

* *Standard Telephones and Cables Ltd.*

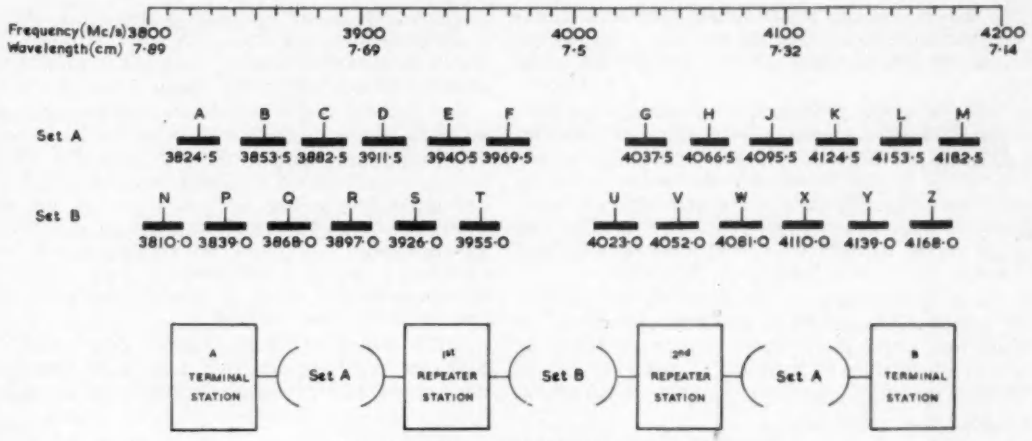

Fig. 1. C.C.I.R. frequency plan and its application

caused by the unwanted signal being reflected from the back of one aerial and entering the adjacent one. This trouble was easily overcome and on later systems the aerials were invariably placed directly above one another, with a horizontal screening plate in between.

Another source of coupling was traced to reflections from the immediate foreground, including the station building itself. Coherent reflections from sharply defined features of the terrain, like cliffs and ridges behaved similarly. A special testing equipment was developed, measuring the magnitude and distance of the reflection, and a method of calculation was finally arrived at, which made it possible to evaluate the effect theoretically once the features of the terrain were known.

It was found, however, that the choice of sites to give adequately low foreground reflections became far more difficult, if the same frequencies were to be used in the two directions of transmission, and a more radical approach was developed.

In the C.C.I.R. frequency plan for wideband systems, there are two sets of frequencies (see Fig. 1) which can be called 'A' and 'B'. The frequency spacing between corresponding radio channels in the two sets is 14·5Mc/s and is too small for both sets to be used on the same hop. It is, however, permissible to use the sets alternately when going along a route (with full conservation of the radio spectrum) so that any foreground or aerial crosstalk effects at a station would then fall outside the signal base-band which considerably eases the site selection problems. This solution has been used in the planning of 600 channel telephony routes in New Zealand (Palmerston North-Hamilton, Fig. 2), Switzerland (Berne-Geneva), and between England and France (Folkestone-Lille). At a branching point the choice is made in such a way as to minimize the total interference: in other words, the two directions with least coupling between them use the same allocation (Fig. 2).

Another kind of unwanted signal can reach a receiving aerial by 'overshoot' propagation. This propagation underlies tropospheric scatter systems; it is known that the field strength beyond the horizon may rise considerably above its mean level at times and that this level is particularly high in tropical countries. Suitable precautions have to be taken in planning the routes to change direction in such a way that there is an adequate angle between sectors AB and CD, and direction AD, where A, B, C and D are successive stations, B and D using the same frequencies. The directional discrimination of both the aerials is thus brought into play, and this can be re-inforced by cross-

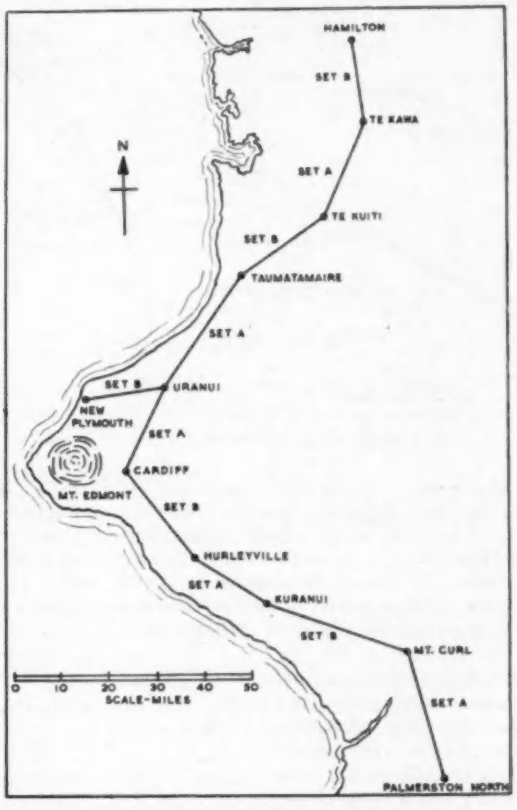

Fig. 2. Route map of a 4 000Mc/s system in New Zealand

polarization if necessary. This principle influenced the planning of two routes in Canada (Fig. 3), where sites could have easily been found in a straight line, and this would have simplified access to the stations on these routes.

The situation becomes more complex if the interfering signals arise outside one's own system or where one has to join two systems using different frequency plans. A difficult case of this kind occurred on the Quebec-Rimouski route in Canada, where a parallel Bell system link existed

using the same frequency band (Fig. 4). Detailed agreement was necessary on sites, polarization, aerial directivity and transmitted powers before safe interworking was made possible.

Even after thorough propagation tests unexpected difficulties may arise due to seasonal variations in the terrain. When planning the route between Rio de Janeiro and Sao Paulo in Brazil it was found that the route originally envisaged, which broadly followed a river valley, became completely unsuitable after rains because of flooding and consequent strong specular reflections. Different sites had to be chosen and tested.

Over-water propagation usually leads to specular reflections and severe fading. This was first noticed on the microwave link across the English Channel established in the early 1930's between Lympne and St. Inglevert[9], which used the first microwave equipment in commercial service

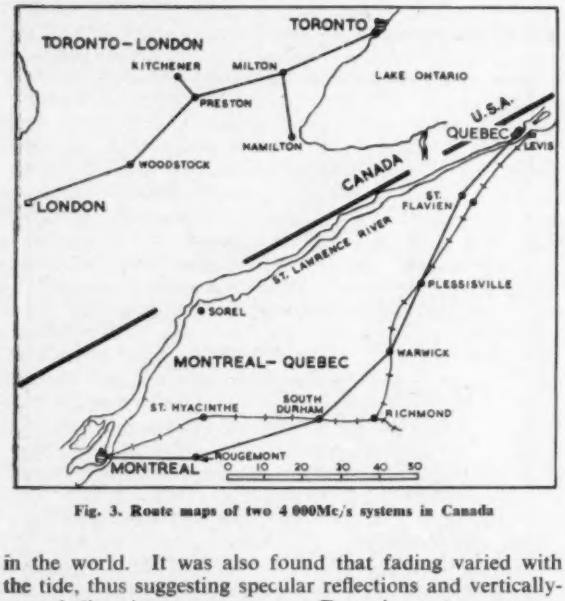

Fig. 3. Route maps of two 4 000Mc/s systems in Canada

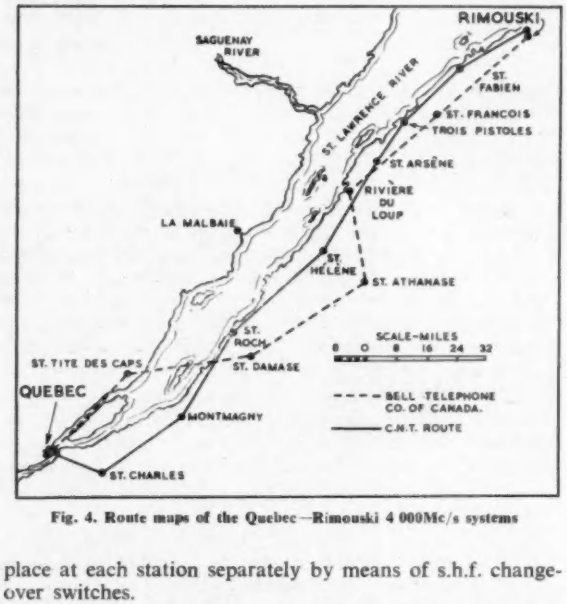

Fig. 4. Route maps of the Quebec—Rimouski 4 000Mc/s systems

in the world. It was also found that fading varied with the tide, thus suggesting specular reflections and vertically-spaced diversity as an answer. Extensive tests were carried out after the war across the Firth of Forth and across Torbay and much information was obtained on the behaviour of over-water paths and the use of space-diversity to reduce the effects of fading.

As a result of this, an automatic phasing junction was developed for diversity reception (Fig. 5), which automatically combines the s.h.f. signals from the separate aerials in the correct phase to give the maximum combined signal. It operates continuously and avoids the switching breaks which occur in some systems of diversity combination.

Combination at s.h.f. obviates the necessity for duplication of receivers, so simplifying the equipment. The resulting diversity is of the 'linear addition' type, i.e. if the signals are equal in strength, a 3dB increase in signal-to-noise ratio is obtained over a single aerial; if one of the signals disappears, there is a 3dB degradation in signal-to-noise relative to the case of the other signal alone.

It is essential that a long-distance system carrying many hundreds of telephony channels or several television signals should have an exceptionally high reliability. This is reflected in the need for thorough checking of the propagation conditions along the route, and in the adequate provision of standby power and radio equipment, together with a reliable supervisory and remote control system to ensure its satisfactory operation. As more experience has been gained the methods of standby equipment provision and operation have changed.

On the Manchester-Kirk O'Shotts system each working equipment was provided with a complete standby equipment operating at the same frequency and switching took place at each station separately by means of s.h.f. change-over switches.

On later systems the approach was modified. Provision was made for a separate radio frequency protection channel as a standby for one or more working channels. The route was divided into sections comprising 4 to 6 repeaters with switching carried out at section ends only.

Fig. 5. Outline of automatic diversity scheme

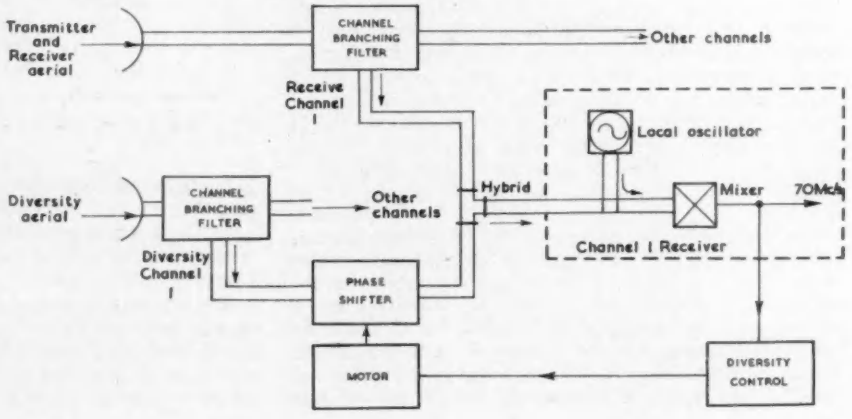

Both base-band switching at terminals and intermediate frequency switching at repeaters or terminals have been developed. The initial application of switching at i.f. on a mixed 240 channel telephony and television system with a common standby channel was on the Osaka-Fukuoka system in Japan.

An arrangement frequently used on a system transmitting only one broad-band signal is parallel transmission of the signal on both the 'working' and 'standby' channels, as experience has shown that for effective operation the standby should be switched on and working on full power all the time. Switching is thus confined to the receiving end only and a simple arrangement using base-band pilot-level and noise detectors selects the more desirable of the two signals permanently available.

If more than one broad-band channel is transmitted this arrangement is no longer possible. The spare channel must be normally kept free; switching has to be carried out at both ends, and so the instruction to switch the sending end must be obtained from the receiver. This inevitably means a greater time lag, but even then the complete sequence occupies less than 100-msec and the actual switching is only a few milliseconds. An up-to-date multi-channel switching arrangement is shown in Fig. 6.

While improvements were being devised in methods of standby provision and in switching arrangements, there has been continuous progress in the reduction of the size and complexity of the equipment and in extending the life of microwave valves.

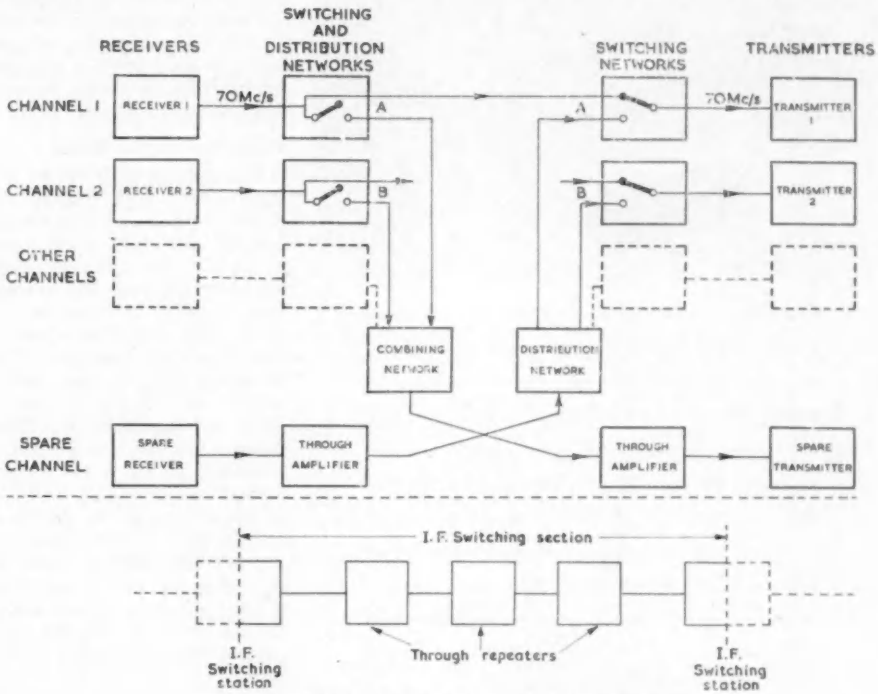

Fig. 6. I.F. switching scheme for several radio channels

On the Manchester-Kirk O'Shotts link, a uni-directional repeater occupied 3½ cubicles of the same size as the single cubicle housing the present-day repeater and the number of valves has been reduced to about 40 per cent of the original number. It is of interest therefore to examine the transmission reliability figures of the earlier equipments, as they should provide a guide to the expected performance of the later systems.

The 'outage' figures in Table 1 have been recorded within arbitrary periods of approximately one year.

All breaks are taken into account except those caused by major power failures or by engineering working parties.

TABLE 1

METHOD OF STANDBY PROVISION	PERIOD	SYSTEM	OUTAGE TIME	PERCENTAGE OF TOTAL TIME
Separate Equipment ..	Oct. 1956-Dec. 1957	Manchester-Kirk O'Shotts	80min 52sec	0·023
Parallel radio channel ..	Nov. 1956-Dec. 1957	Manchester-Emley Moor	6min 3sec	0·002
Parallel radio channel ..	Jan. 1957-Dec. 1957	Dundee-Aberdeen	20sec	>0·001

The two later systems use the parallel channel standby scheme described earlier. It can be seen that the reliability figures are very good even on Manchester-Kirk O'Shotts with its equipment of early design and in its sixth year of service.

As to travelling-wave amplifiers[10], the life of the CV2188 (W7/2D) one-watt tubes has been progressively improved. Of the eight valves initially equipped on the Thrumster-Kirkwall 240 channel telephone system all but one are still working normally after 10 000 hours. This compares with an average life of 3 000 hours on the early models of the CV2188. The latest equipment uses a five-watt travelling-wave amplifier which incorporates the experience obtained with the CV2188.

The experience on coaxial-line microwave oscillator tubes[11] has been that average working lives of about 6 000 hours were obtained from the early days of link operation onwards.

The lengthening of the travelling-wave amplifier's life substantially reduces the cost of microwave valve replacement, which is one of the major charges on link maintenance.

Great simplification has also been effected in equipment maintenance procedures. Here the major steps of progress have been the elimination of automatic frequency control at repeaters, the introduction of fixed tuned i.f. amplifiers and the advent of the ferrite isolator, which has simplified the impedance matching procedures within the equipment.

The present-day equipment incorporating these features is described below.

General Equipment Description

Aerials, Feeders and Branching Filters

The aerials normally used on 4 000Mc/s main-line routes are paraboloids of 10ft diameter with a smooth metal surface. The aerial gain at that frequency is 39·5dB and so the

beam width is only $\pm 1°$ to the half-power points. This makes it necessary to construct a rigid supporting structure, usually taking the shape of a steel lattice mast of rectangular cross-section and a fairly broad base. As the radio stations are frequently situated on high ground and in exposed positions, the structures must be designed to withstand gusts of up to 120mile/h with an aerial beam deflexion well under one degree. Conditions like this are met,

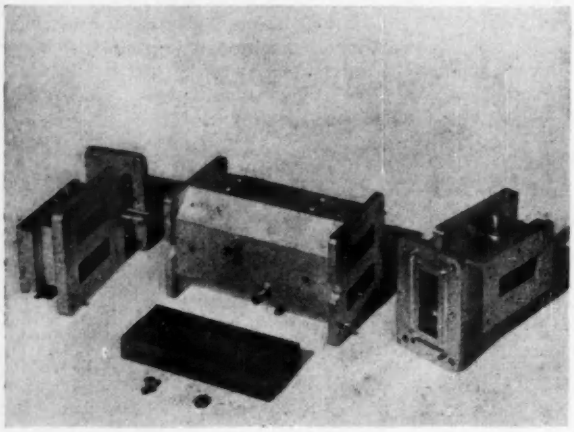

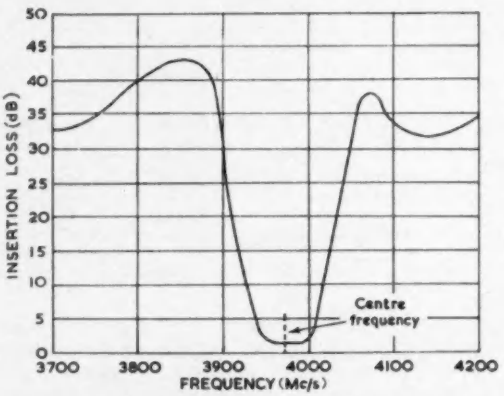

Fig. 7. Exploded view and characteristic of a channel branching filter

for example, on the Thrumster-Kirkwall route and on the Sydney-St. Johns system in Newfoundland.

The aerial reflector is fed from a waveguide horn supported in front of it by a bar parallel to the aerial face, half of which forms the waveguide feed. A rear feed may have certain advantages and its introduction is being considered.

A rectangular waveguide feed of 2in by 2/3in cross-section connects the aerials with the remainder of the equipment situated inside a building at ground level.

The branching filters separating or combining the different radio-frequency channels for common-feeder working are situated inside the building and common transmit-receive working is employed with the three channels of the C.C.I.R. allocation (see Fig. 1) using a common polarization connected to one feeder and aerial.

The other three cross-polarized channels use another aerial with a separate set of branching filters. This arrangement has the advantage of not requiring polarization separators and of easing certain channel crosstalk problems. It also means that in the great majority of cases, where system installation starts with two or three r.f. channels, only one aerial is required per station per direction at first, thus spreading the capital cost of a fully-equipped system. The feeder is simple and no spurious mode problems arise.

The branching filter (Fig. 7) consists of two band reflection filters, spaced a quarter-wavelength apart. Compact waveguide hybrids at each end perform the splitting, dropping and combining functions. The through attenuation of the filter to the dropped channel frequency is 35dB, but at any other channel frequency it is only 0·1dB. The band width of the dropped channel is about 55Mc/s.

The match of the filter to the main run is such that even with several filters in tandem the reflection at the filter end of the aerial feeder does not exceed 4 per cent.

The 'drop' arm of each branching filter is connected to its bay of equipment through a short length of coaxial cord with spot-matched transitions. This imparts mechanical flexibility to the station layout while keeping the cord loss down to about 0·25dB.

5W Repeater Equipment

The arrangement of the repeater is shown in Fig 8. The s.h.f. input signal from the branching filter passes through a four-section input filter and an isolator into the input mixer, where it is converted to the C.C.I.R. recommended i.f. of 70Mc/s. Three i.f. amplifiers follow: the pre-amplifier is designed for the lowest possible noise figure with a conversion gain of some 20dB. With available input converter diodes, the overall noise figure is 11 to 12dB. The main i.f. amplifier, with a maximum gain of some 60dB follows, delivering a signal of 0·5V which is kept constant by a.g.c. action. Finally, the i.f. output amplifier drives the medium level balanced convertor employing two germanium diodes. The medium level convertor is fed with about 0·8W of power from the coaxial-line local s.h.f. oscillator tube via a ferrite isolator, which eliminates the distortion effects of local oscillator pulling. The output from the medium-level convertor, at approximately 20mW, passes through another isolator, then through a four-section waveguide filter selecting the appropriate sideband and into the travelling-wave amplifier. At the output of this tube the signal level is 5 to 7W and, after passing through another isolator, it passes to the repeater output.

The local oscillator tube feeds both the convertors: the transmitting one directly, through the isolator, the receiving one through a shift mixer and two band-pass filters, each tuned to one of the local oscillator frequencies. The shift mixer is driven by a crystal-controlled oscillator-multiplier at the difference frequency of the input and output radio frequencies. This ensures that both local oscillator frequencies are on the same side of their respective signal frequencies, making the repeater frequency shift independent of any drift in the local oscillator. The accuracy of the frequency shift is of the order of 10 to 20kc/s and so the accuracy of the radio frequencies themselves is primarily determined by the terminal transmitter.

At successive repeaters the local oscillators are placed alternately above and below the radio frequencies, thus reversing the sense of the i.f. signal deviation at each repeater. This has the effect of cancelling any systematic component of even order harmonic distortion arising in the i.f. chain.

In earlier systems independent local oscillators were used for the two mixers, each of them controlled by an a.f.c. chain[3]. This could give a cumulative frequency error along a line of repeater stations, apart from added cost and complexity.

The latest local oscillator does not employ an automatic frequency control, but relies on a specially designed coaxial-line tube[11] which has a low pulling figure and low frequency sensitivity on its electrodes. If ageing effects are ignored, the stability of any oscillator depends on temperature, electrode potentials and load impedance. The tube is placed in a simple relay-controlled thermostatic oven kept above the maximum possible ambient, at about 60°C. An air stream is used to couple the cavity to an on-off heater. Temperature control better than 1°C peak-to-peak is thus achieved. The oscillator is fed from a stabilized power supply and feeds into an output isolator.

As a result the frequency stability is at least as good as with the former a.f.c. system: a typical daily frequency excursion is less than 100kc/s peak-to-peak and the drift of the mean frequency is about 100kc/s per month.

The shift mixer is of interest, as it is one of the few elements common to all modern repeaters. As the shift frequency in the C.C.I.R. scheme is relatively high, just over 200Mc/s, a relatively low harmonic (approximately the 20th) might fall close to the input frequency or the receive l.o. frequency. In both cases the harmonic level may be intolerably high in certain r.f. channels if the silicon diode in the shift mixer is driven in the usual way. A circuit has been developed for driving the diode in such a manner that the 4 000Mc/s harmonics are reduced by about 45dB relative to normal drive at a cost of an additional 2dB in s.h.f.-to-s.h.f. conversion loss. This removes all possible restrictions on the choice of shift frequencies and working channels which might be otherwise imposed by interference from harmonics.

All intermediate frequency amplifiers use the same type of inter-stage circuit: a parallel-tuned band-pass transformer with coupling factors between 0·5 and 0·7. Single or double damping is used according to individual circuit requirements. The coils used are true physical transformers and not three-inductor analogues.

The coils are preset and are reproduced against a precision standard initially developed to tune with the mean valve capacitances.

Coils of this type considerably simplify system maintenance, because in the absence of tuning only gain measurements are necessary when changing a tube[6].

The medium level mixer is an important part of the repeater, as it has the effect of limiting the signal just before the output travelling-wave amplifier[3]. One of the very few distortion effects that can arise in this tube is a.m.-to-p.m. conversion[13] and the limiting action helps considerably to minimize its incidence. Cumulative limiting at each repeater is also beneficial from the systems point of view, and one of the advantages of conversion-type limiting is that it operates over a wide band and does not introduce the troublesome stray distortion effects associated with some other types of broad-band limiter. The medium-level convertor uses germanium diodes specially designed to give good conversion properties up to 100Mc/s, but to produce negligible harmonics of the 70Mc/s signal which might fall near the output frequency.

The travelling-wave amplifier[10] gives 27 to 29dB of amplification over a bandwidth of some 600Mc/s. Group delay distortion and drift effects are negligible: the band-pass characteristic is entirely determined by the passive filter preceding the tube. There is no tuning as such—merely impedance matching, which in systems employing isolators means adjustment for maximum signal level when setting up.

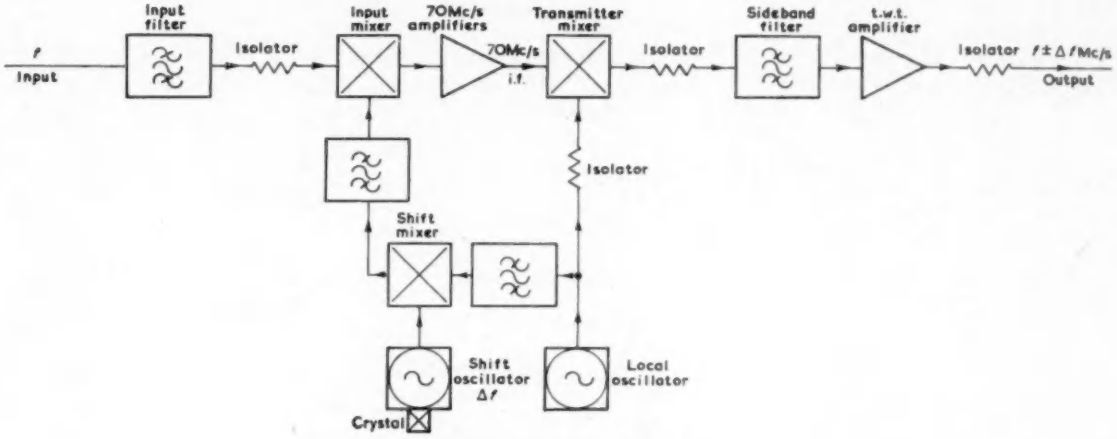

Fig. 8. Block schematic of a 5W s.h.f. repeater

Apart from the above advantages, the travelling-wave amplifier is robust and long-lived. Once adjusted it needs virtually no maintenance and a clear indication of the degree of tube ageing in operation is provided by the electrode voltages, so replacement is a matter of routine.

All waveguide filters in the repeater use quarter-wave spacing between cavities[14] and planar ' side-by-side grouping of waveguide components into blocks. This is made possible by the development of a planar analogue of a three-dimensional hybrid with considerable band-width. These developments have substantially reduced the size of the repeater.

Operationally, the main advantages of this type of repeater could be stated as follows:

(a) Flexibility of system operation, e.g. if dropping or injection of a television signal is required at any future date, the i.f. point is available.

(b) Compactness, largely due to the small volume occupied by i.f. amplifiers.

(c) Stability of characteristics, caused by absence of active filters with a small fractional bandwidth.

(d) Low tube replacement costs, with only two long-lived microwave tubes in the circuit.

(e) Similarity of the radio equipments at repeaters and terminals (see below).

(f) Cumulative limiting in the medium-level convertors.
(g) Simplicity of maintenance.

5W Terminal Equipment

Transmitter terminals using a klystron modulated oscillator working at the final output frequency, followed by a t.w.t. are being extensively used[3] on systems where the additional terminal flexibility gained by having an i.f. point available is not worth the further complication in the equipment (Fig. 9b). As this type has been fully described elsewhere, the more complicated terminal is described below.

At a terminal with i.f. points available at the transmitter and receiver (Fig. 9a) the equipment can be diveded functionally into two parts: the radio terminal proper and the modulator-demodulator. 70Mc/s points are provided at both the transmitter and receiver—they form the demarcation line between the two parts. Functionally, the radio terminal is little different from the repeater, converting a 70Mc/s signal to 4 000Mc/s at the transmitting end and performing the reverse process at the receiver.

What is essentially peculiar to the terminal is the frequency modulation and demodulation process.

The modulator and demodulator may be divorced from the s.h.f. band in which the equipment is working and their characteristics are dictated solely by requirements on distortion of the information transmitted.

The application of pre-emphasis which reduces the asymmetry and effective deviation of the television picture has made it possible, to produce a terminal equipment common to both television and telephony. The transmitter a.f.c. operates on the mean carrier frequency.

A klystron oscillator is used to produce the modulation and it is mixed with a stable local oscillator to produce the i.f. signal.

The mixer provides an appreciable amount of limiting, as the klystron supplies the high-level signal. A.F.C. is applied mechanically within the klystron cavity.

The base-band amplifier immediately preceding the klystron is flat over the television video bandwidth while at the same time giving negligible non-linear distortion when handling 600 telephone channels.

The i.f. output is 0·5V at 70Mc/s: the frequency is controlled within close limits, as the reference for the a.f.c. is derived from a 70Mc/s crystal-controlled oscillator.

The common demodulator is conventional, consisting of a wideband limiter and discriminator and a wideband output base-band amplifier.

Switches are provided to change the different attenuator, pre-emphasis and output networks associated with either television or telephony.

As the pilot frequency is 3·2Mc/s in the case of telephony and 7Mc/s or 8·5Mc/s in the case of television, automatic network switching can easily be provided on the basis of pilot detector outputs.

Looking ahead, the techniques which have been so well established in the 4 000Mc/s band are already being extended to the 6 000Mc/s band and it is probable that a single wideband s.h.f. channel will be expanded in transmission capacity to about 1 800 telephony channels or a combination of telephony and television signals. The rate of development in this field is noteworthy when it is remembered that it is only fifteen years since the travelling-wave amplifier was invented, but it should be emphasized that the development rests on a solid foundation of field experience in many countries and differing conditions of service.

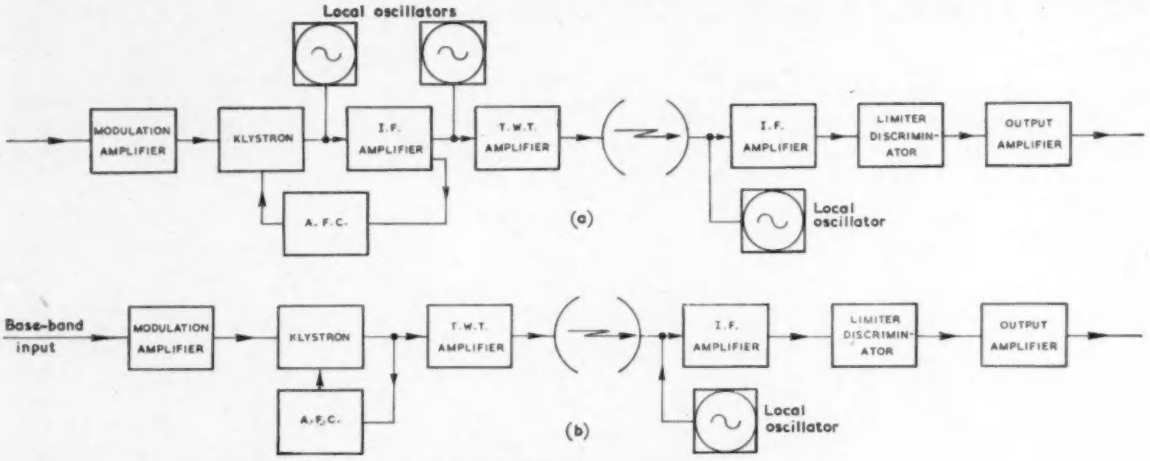

Fig. 9. Block schematics of s.h.f. terminals
(a) I.F. type (b) Direct modulation type

Acknowledgments

The authors wish to thank Standard Telephones and Cables Limited and the Engineer-in-Chief of the General Post Office for permission to make use of the information obtained in the article. Figs. 1, 2, 3 and 4 are reproduced by courtesy of 'Alta Frequenza'.

REFERENCES

1. Kompfner, R. The Travelling-Wave Valve. *Wireless World. 52*, 369 (1946) and *Wireless Engr. 24*, 255 (1947).
2. Rogers, D. C. The Travelling-Wave Tube as Output Amplifier in Microwave Radio Links. *Proc. Instn. Elect. Engrs. Pt. 3, 100*, 151 (1953).
3. Dawson, G., Hall, L. L., Hodgson, K. G., Meers, R. A., Merriman, J. H. H. The Manchester-Kirk-O' Shotts Television Radio-Relay System. *Proc. Instn. Elect. Engrs. 101*, Pt. 1, *43* (1954).
4. Roetken, A. A., Smith, K. D., Friis, R. W. The TD-2 Microwave Radio Relay System. *Bell Syst. Tech. J. 30*, 1041 (1951).
5. Libois, L. J., Thue, M. Les Nouveaux Systemes de Faisceaux Hertziens de l'Administration Francaise des P.T.T. *Onde Electrique*. (Nov. 1957).
6. McDavitt, M. B. 6000Mc/s Radio Relay System for Broad-Band Long-Haul Service in the Bell System. *Alta Frequenza*. (Oct. 1957).
7. C.C.I.R./C.C.I.T.T. Documents.
8. Documents of the 8th Plenary Assembly, C.C.I.R. Warsaw, 1956. Vol. 1. (I.T.U. Geneva 1957).
9. Clavier, A. G., Gallant, L. C. The Anglo-French Micro-Ray Link between Lympyne and St. Inglevert. *Elect. Commun. 12*, 222 (1934).
10. Burke, P. F. C. Travelling-Wave Tubes for 4000Mc/s. *Electronic Engng. 30*, 310 (1958).
11. Lambert, D. C. Coaxial-Line V. M. Oscillator Valves. *Electronic Engng. 30* 324 (1958).
12. Lewin, L., Paine, J. Aerial Feeders. *Electronic Engng*. To be published.
13. Laico, J. P., McDowell, H. L., Noster, C. R. A Medium Power Travelling-Wave Tube for 6000Mc/s Radio Relay. *Bell Syst. Tech. J. 35*, 1285 (1956).
14. Craven, G., Lewin, L. Microwave Filters with Quarter-Wave Couplings. *Proc. Instn. Elect. Engrs. 103B*, 173 (1956).

All Travelling-Wave Tube Systems

By S. Fedida*, B.Sc.(Eng.) (Hons.), A.C.G.I., A.M.I.E.E.

The intrinsic features of all travelling wave tube microwave link equipment, of a type similar to the projected London to Norwich television radio relay, and their unique advantages and versatility in applications demanding a high grade of performance, are described in this article.

Possible sources of distortion in travelling wave tubes are analysed and methods of reducing their effect to acceptable values, are indicated.

THE development and installation of broad-band microwave line of sight communications systems has been a major feature of the post-war increase in communications facilities, mainly in Europe and North America.

Early designs have tended to concentrate on valves of conventional design, while systems of later vintage have introduced travelling-wave tubes, at least in the output stage. Most of them, on the other hand, have provided the greater part of the gain required in the non-demodulating repeater, by the use of i.f. amplification.

At least one commercial design[1] exists, at the present time, wherein full advantage has been taken of the suitability of the travelling-wave tube for this type of service, to the extent of eliminating i.f. amplifiers altogether in the basic non-demodulating repeater.

The purpose of this article is to highlight some of the more relevant properties of travelling-wave tubes and the advantages of all travelling tube systems as applied to microwave communications links.

The Travelling-Wave Tubes

Although the travelling-wave tube was invented only 14 years ago[2], such is the speed of modern technological development, that it is now taken for granted and regarded as an almost conventional device. While great credit must be given to the pioneers who turned this epoch-making invention into a device available in commercial quantities, it is fair to say that further significant improvements in performance and utilization can be expected, as their use becomes more widespread and their properties better understood.

At the present time, they are available for a variety of duties, and for use at practically all microwave frequencies, from 1 000Mc/s upwards. Power outputs range from 1mW to 20W and gains from 20dB to 50dB, in a single envelope.

The medium power travelling-wave tube (1 to 10W) is generally operated at a helix potential of 2 to 3kV and takes currents of 40 to 60mA, while more recently tubes operating at helix potentials of about 1kV and taking higher currents have been introduced.

The intermediate power and low noise travelling-wave tubes operate at a helix potential of under 1kV, and take currents of 4 to 10mA, and 200 to 300μA respectively. Typical noise figures are 6 to 10dB for receiving tubes and less than 20dB for intermediate power tubes.

Electromagnetic field requirements for travelling-wave tubes vary between 100 and 200W, according to type. Several tube types are also available at present with integral or external permanent magnet focusing.

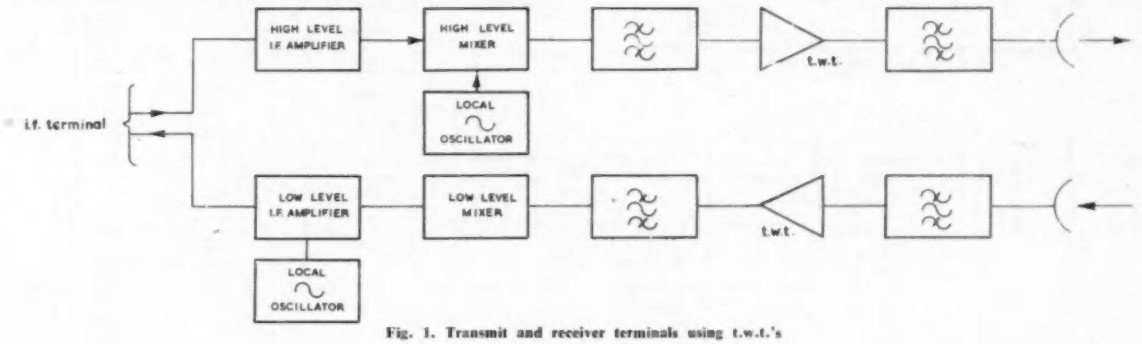

Fig. 1. Transmit and receiver terminals using t.w.t.'s

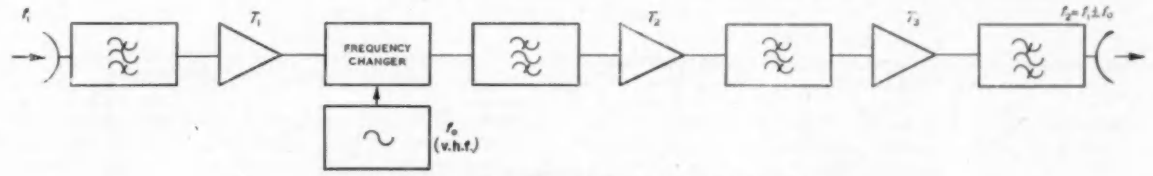

Fig. 2. Basic non-demodulating, all t.w.t. repeater (one way)

Structure of Typical Microwave Links

The structure of a typical microwave link featuring travelling-wave tubes is generally quite simple.

Terminals consist essentially of an r.f. amplifier, a frequency changer and associated filters. In transmitting terminals, a high level i.f.-to-microwave convertor is required, while in receiving terminals a low level microwave-to-i.f. convertor is necessary (Fig. 1).

Non-demodulating repeaters, not requiring channel

* *Marconi's Wireless Telegraph Co. Ltd.*

dropping facilities, are, if anything, simpler. They may consist of three or four travelling-wave tubes, a frequency changer and associated filters (Fig. 2).

Channel dropping facilities may be incorporated quite readily, as shown in Fig. 3, at the expense of an additional frequency changer in the through signal chain, but only when channel addition and extraction is to be performed at a standard i.f. frequency.

The structure of the corresponding i.f. repeater is shown in Figs. 4 and 5, where an indication of the increased complexity is evident. This point will be considered again later.

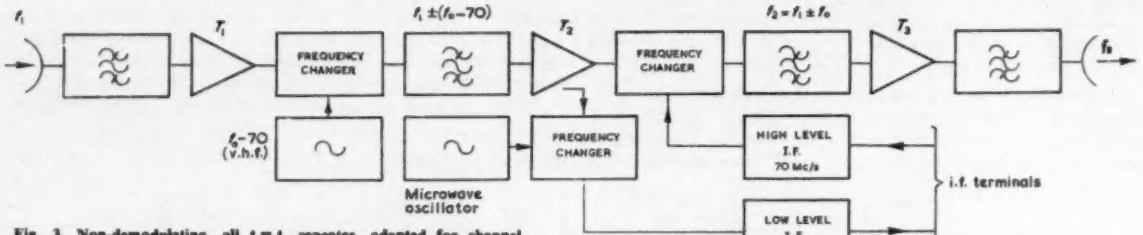

Fig. 3. Non-demodulating, all t.w.t. repeater, adapted for channel addition and extraction (one way)

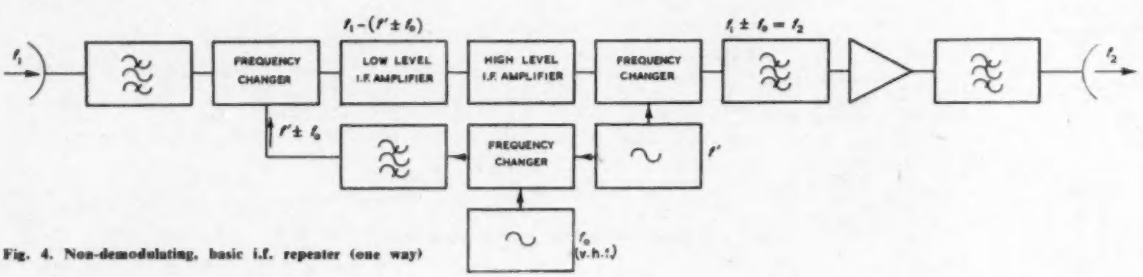

Fig. 4. Non-demodulating, basic i.f. repeater (one way)

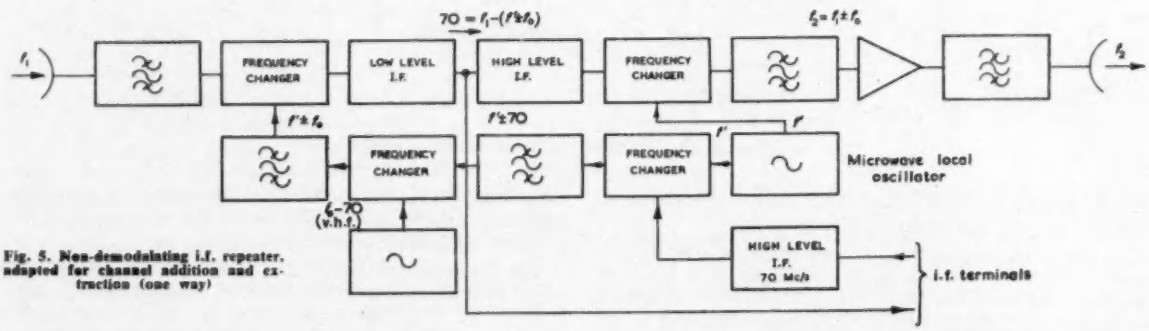

Fig. 5. Non-demodulating i.f. repeater, adapted for channel addition and extraction (one way)

Functional Advantages of Travelling-Wave Tubes

Bandwidth

One of the most well-known, and at the same time the most remarkable property of travelling-wave tubes is their extraordinarily large bandwidth. For example[3], a typical travelling wave tube operating at a centre frequency of 6 000Mc/s has, in the low level signal condition, a bandwidth of well over 2 000Mc/s.

Admittedly, this very large bandwidth is, at present, much greater than may be usefully employed in conventional microwave links, but it has the decided advantage of eliminating the need to use difficult-to-align interstage circuits, which are a source of great difficulties, in wideband i.f. amplifiers.

Another advantage is that tube changing, which often requires circuit realignment, in wideband i.f. amplifiers may, with travelling-wave tubes, be done without difficulty, provided means are adopted to ensure that the return loss at the input and output terminals is maintained at the requisite value.

One way of attaining this objective is a matter for the tube designer. It is a function of the uniformity of the helix, the impedance matching properties of the attenuating elements within the tube, and the design of the helix to transmission line transducers, at the input and output terminals of the tube. The problem is, however, difficult to resolve, particularly in the case of the medium power tube, where the attenuator is situated in the first half of the helix, with the result that reflections at the attenuator are greatly amplified and their rate of change of phase with frequency is very high. In spite of these difficulties, return loss figures of greater than 26dB, over bandwidths of the order of 40Mc/s around any frequency within the operating range of the tube, are currently obtained[4].

A solution which is now gaining considerably more favour is to use ferrite isolators. These have now reached a sufficiently advanced state of development as to be cheap, reliable and readily available.

When isolators are used, tube changing may be accomplished without requiring any readjustments whatsoever to the input and output circuits. Furthermore, they minimize the effect of long line echoes, which are accentuated

when travelling-wave tubes are connected directly to long feeders.

Another development of a mechanical nature, intended to facilitate the changing of tubes, is encapsulation. The whole tube, complete with helix to coaxial line transducer, is enclosed in a metal shell fitted with input and output coaxial connectors[5]. Apart from the advantage of rigidity and ruggedness obtained thereby, the changing of tubes may be entrusted quite safely to relatively unskilled personnel, if necessary. There is hardly any need to emphasize the importance of this feature, particularly in installations located in sparsely populated territories.

The penalty for encapsulation is loss of available gain which, in the case of interstage tubes, is quite unimportant. Loss of gain at the input of the low noise tube and at the output of the power tube is seldom acceptable, unless it is taken into account in the early tube and link design stage and other parameters adjusted accordingly to compensate for it.

Encapsulation tends, in certain cases, to increase the capital cost of the equipment. This is due to the fact that encapsulated tubes do not in general incorporate facilities

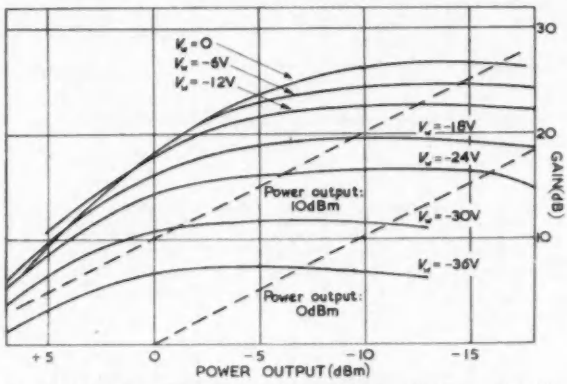

Fig. 6. Gain characteristic of an intermediate travelling-wave tube (At various values of Wehnelt voltage)

for the adjustment of the return loss at the input and output terminals. In applications where high transmission quality is essential, as in the case of multi-channel telephone systems and television systems conveying a music channel, or colour information, isolators must be used in large numbers and this may be uneconomical.

Automatic Gain Control

The total amount of gain required at microwave link repeaters is usually of the order of 70dB, for favourable propagation conditions. A fading margin of 20 to 30dB must also be allowed for by the provision of additional gain and an automatic gain control arrangement.

The provision of automatic gain control in i.f. amplifiers does not introduce excessive difficulties, provided the control is applied to low impedance stages. Automatic gain control may also be readily applied to travelling-wave tubes, but in a repeater of the type shown in Fig. 2, only one tube (tube T_3) is available for this application. Gain control on the other tubes results in a degradation of noise figure or a reduction in power output, and neither of these results is acceptable.

Typical gain characteristics for a low power travelling wave tube, at various values of Wehnelt voltages, are given in Fig. 6. It may be seen that a gain variation of about 20dB may be obtained for a Wehnelt voltage change of 36V, at an output power level of 1mW. Approximately the same voltage change is also required at an output level of 10mW.

An input/output characteristic for the same travelling-wave tube, with and without a.g.c., is shown in Fig. 7. The output is maintained constant to within $\pm 0{\cdot}5$dB of 10mW, over a power input range of 20dB. A d.c. amplifier having a gain of about 600 was used to amplify the variations in output, which was monitored by a silicon diode rectifier, connected to the output of the travelling-wave tube through a 10dB directional coupler. In a repeater application this monitor should be coupled to the power output tube, provided this tube is not limiting, so as to take advantage of the additional gain provided. Thus the gain of the a.g.c. amplifier need not be more than about 40dB, in order to provide adequate control.

The application of a.g.c. to a repeater has an important bearing on the gain requirements and the power handling capacities of each one of the travelling-wave tube types used. In a typical repeater the input power may be of the order of 1μW, and the output power of the order of 10W. Where a.g.c. is obtained by the application of bias to the Wehnelt of a travelling-wave tube, both gain and power

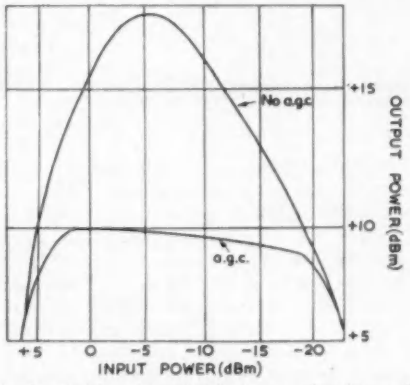

Fig. 7. Gain characteristic, with and without a.g.c. of an intermediate power travelling-wave tube

handling capacities are reduced to approximately the same extent. It follows that the ratio of saturation power to operating power in a gain controlled t.w.t. should be at least equal to the a.g.c. range required. It is clearly important, therefore, to reduce the operating output power of this tube to the absolute minimum.

This calls for the removal of the second frequency changer (Fig. 3), from the output to the input of the intermediate tube, and since the output tube is not likely to have a noise figure of much better than about 30dB, it follows that at a drive of 1mW the noise power contribution of this tube is about one-tenth that of the low noise tube, assuming the latter to have a noise figure of 10dB. (It is usually lower). Similarly the drive to the intermediate tube must not fall below about 100μW.

Thus the requirement for a.g.c. in a repeater calls for a power tube gain of 40dB approximately, at an output power of 10W (or 37dB at 5W), for an intermediate tube saturation power of at least 250mW, with a gain of 30dB at 100mW output, and for a low noise tube saturation power of about 10mW, with a gain of 32dB, at an input power of 1μW. This assumes that the loss of each frequency changer is no greater than 6dB.

A block diagram of an all t.w.t. repeater, fitted with a.g.c. and capable of channel insertion and extraction, is given in Fig. 8. Typical power levels along the repeater, under free space conditions, are also given.

The application of a.g.c. to a repeater (Fig. 9) when a total of four tubes is used, is relatively easier and the specifications imposed on the tubes and the frequency changers are easier to meet. These factors have to be weighed up against the cost of the additional tube with its associated mount and power supplies. It is, however, a simple solution which could be justified in the longer run as the cost of manufacturing tubes is progressively reduced. For a desired a.g.c. range of 20 to 25dB, the maximum power handling capacity of the intermediate tube need not exceed 100mW and the frequency changer loss may be up to 10dB

It may also be possible to transmit two broadband channels simultaneously, but the penalties to be incurred in a one-way repeater, in terms of reduced power output, are still to be fully investigated.

Frequency Changing

The use of travelling-wave tubes as frequency changers has already been dealt with in the technical literature[6] and in certain cases it is of advantage to employ them in this duty. There are, however, two major difficulties.

The drive required to operate a general purpose low power tube efficiently in this mode is of the order of 10 to

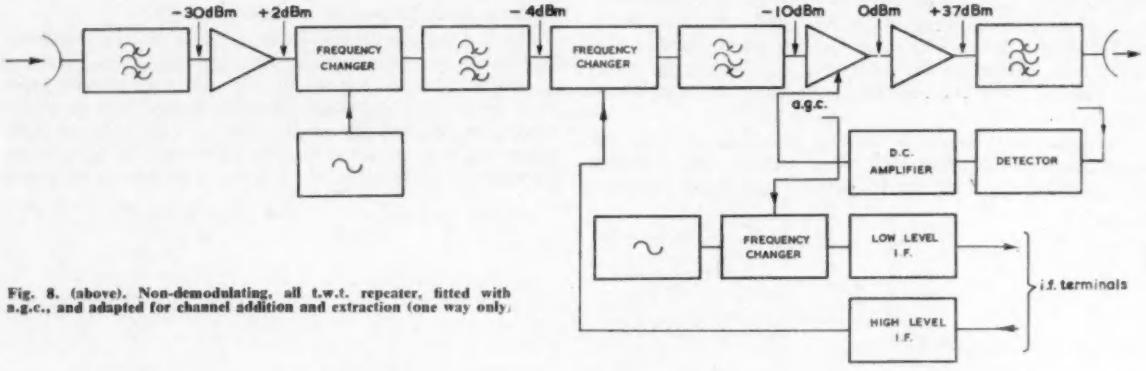

Fig. 8. (above). Non-demodulating, all t.w.t. repeater, fitted with a.g.c., and adapted for channel addition and extraction (one way only).

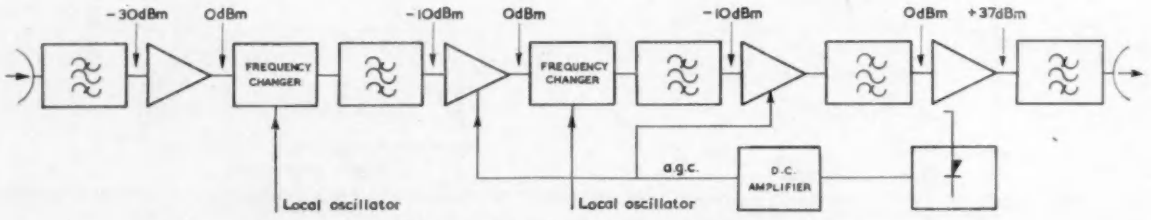

Fig. 9. Application of a.g.c. to four tube repeater

Furthermore the intermediate tubes are operated at approximately 10dB below saturation power.

A 'reflex' mode of operation, which combines the cheapness of the three tube repeater with the high gain of the four tube repeater, is made possible by virtue of the very large bandwidth of travelling-wave tubes. Here (Fig. 10) the signal makes two or more transits through the same tube, and its frequency is changed after each transit except the last one. Intermodulation effects are, of course, liable to occur at certain power levels and the correct choice of tube power-handling capacity must be made, if these effects are to be maintained at an acceptably low value. Recent tests with 600 channel noise loading have indicated that the intermodulation level in a three tube reflex repeater is no higher than in the corresponding four tube repeater.

The above measurements indicate that a one-way t.w.t. repeater may well be used in certain circumstances as a two-way repeater, as indicated in Fig. 11. The potentialities of this arrangement have not been fully investigated yet but it seems that, provided the level of one of the signals is about 20dB lower than the level of the other, the intermodulation noise is not detectable. One possible application of this system is for the transmission of supervisory information and/or a small number of telephone channels along a normally unidirectional link, such as may be used for the relaying of television only.

15V, in a capacitive impedance of about 30 to 40pF. As long as the bandwidth of the drive circuit is not required to be large, i.e. when the local oscillator has a fixed frequency, there are no great difficulties in providing the requisite drive, and the saving of a special microwave mixer is then worthwhile. If, however, the bandwidth must be large, as in the case of the channel insertion mixers, then it is more economical to provide a separate diode mixer, which requires a drive of only about 1V r.m.s.

Another objection to the use of a travelling-wave tube as a mixer results from the reduction in the saturation power by about 6dB.

If a.g.c. is to be applied to a tube operated as a mixer, it follows that the control range is reduced by about 6dB. This would be acceptable in a four tube repeater, but not in a three tube repeater.

Noise Figure and Input Impedance of Repeater

At the present stage of microwave mixer technique the low noise tube has a noise factor advantage of 4 to 6dB over the best silicon wide band mixer available. This is a considerable difference and the resulting advantages for the t.w.t. system are an increased reliability and protection against fading and a reduction in the cost of ancillary equipment such as aerials, towers and feeders, for a given overall performance. A further advantage derives from the

fact that the return loss at the input of a low noise travelling-wave tube may be made to exceed 30dB over a bandwidth of 50 to 100Mc/s, given a correct transducer design. While silicon diode mixers have been made with an input return loss exceeding 26dB over bandwidths of the order of 20Mc/s, the performance is subject to appreciable degradation in service and invariably with change of diodes. The readjustment of the mixer, after a change of diode, is not an operation which can be satisfactorily carried out in the field. When isolators are used, the cost of the mixer unit is increased and the noise factor degraded by up to 1dB.

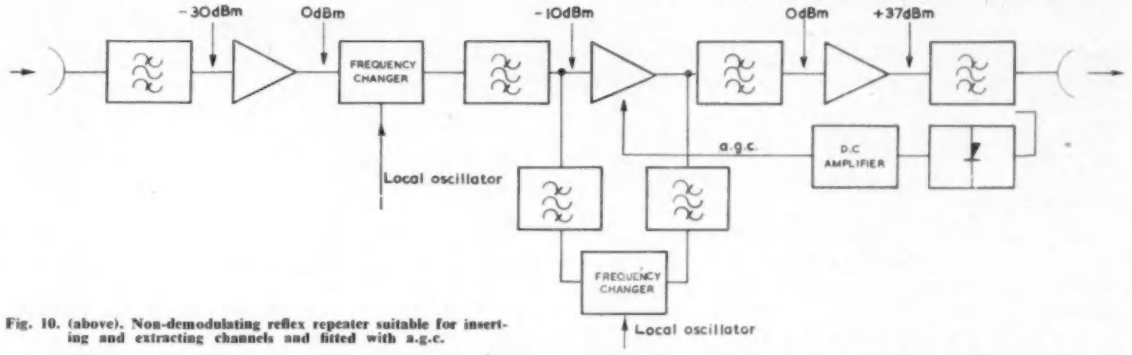

Fig. 10. (above). Non-demodulating reflex repeater suitable for inserting and extracting channels and fitted with a.g.c.

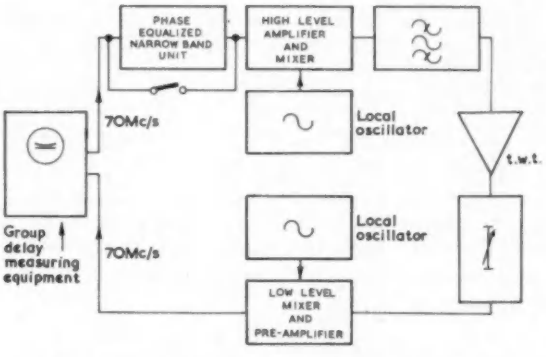

Fig. 11. Measurement of a.m. to p.m. conversion in travelling-wave tubes

Permanent Magnet Focusing

The power consumption of travelling-wave tubes is quite modest. Discounting the output tube, which is normally a necessity in both i.f. and r.f. repeaters, the total power consumption of the additional tubes including cathode heating is less than 30W.

The focusing electromagnets, on the other hand, require a minimum of 100W each and great savings may be made in this direction, by substituting permanent magnets.

Travelling-wave tubes may be focused with uniform fields or periodic fields[7]. The use of the latter has been confined so far to experimental equipment but medium and intermediate power tubes, featuring the former, are available commercially and have been incorporated in commercial equipment.

Low noise tubes[8] may also be focused with permanent magnets, but the design of a suitable periodic structure, capable of giving adequate focusing with no degradation of noise figures, is not easy to achieve. A suitable arrangement using bar magnets and a uniform field presents no difficulties.

A permanent magnet periodic field system has the great advantage over a uniform field system in that the stray field is extremely small and the internal field is consequently very insensitive to the proximity of ferrous materials. On the other hand, and more particularly at the higher microwave frequencies where the diameter of the helix becomes smaller, the tolerances on the uniformity of the individual ring magnets become more difficult to meet.

Experiments performed in this laboratory on the type N1001 tube have indicated that, provided the field at the gun end of a travelling-wave tube is correctly shaped, extremely good focusing performance may be obtained with a periodic structure made up of Magnadur II ferrite magnets and soft iron pole pieces. No difficulties were experienced with tolerances in the magnetization of the individual ring magnets, and a single adjustment was sufficient to obtain good focusing (i.e. better than 99 per cent transmission) when changing tubes.

Recently, experimental tubes featuring internal electrostatic periodic focusing have also been made and one can have no doubt that advances in this and other fields will soon eliminate the need for bulk and expensive electromagnets.

Amplitude to Phase Conversion

An important effect occurring in all electron devices, and particularly in present-day travelling-wave tubes operating near the power saturation limit, consists in a change of carrier phase corresponding to a change of carrier amplitude.

For a typical medium power travelling-wave tube[9], the rate of change of carrier phase with amplitude is of the order of 2·5°/dB at a level of 5W and 6°/dB at a level of 10W, always assuming that the helix potential is set at the value for which the tube gain is at a maximum at the stated output power.

This has two effects. The one is to give an apparent change to the frequency response and the other to the group delay characteristic of the system.

The change in the frequency response ocurs in this way. If it is assumed that the frequency modulated carrier applied to the t.w.t. has a small amount of incidental amplitude modulation, defined by a constant slope of xdB/Mc/s (x may be positive or negative), the t.w.t. will be phase modulated in synchronism with the frequency modulation signals. For a sinusoidal modulation frequency f_m and a peak carrier deviation Δf, the effective peak phase deviation is:

$$\Delta\phi = x \,.\, \Delta\theta \,.\, \Delta f \,.\, (\pi/180) \quad \ldots\ldots\ldots\ldots \quad (1)$$

where $\Delta\theta$ is the rate of a.m. to phase conversion degrees per decibel.

This phase deviation, which occurs at a rate f_m is equivalent to an interfering frequency deviation δf, given by:

$$\delta f = f_m \Delta\phi$$

$$\delta f = (\pi/180) \cdot x\Delta\theta \cdot \Delta f \cdot f_m \quad \ldots\ldots\ldots\ldots (2)$$

The ratio of interference δf to the signal deviation Δf, which is

$$\delta f/\Delta f = (\pi/180) \cdot x\Delta\theta f_m \quad \ldots\ldots\ldots (3)$$

is clearly only a function of the amplitude slope of the applied carrier, the rate of change of phase with amplitude of the travelling-wave tube and the modulation frequency. The actual frequency deviation Δf is irrelevant.

The resulting output video response is

$$A_t = 1 + (\pi/180)\, x \cdot \Delta\theta \cdot f_m \quad \ldots\ldots\ldots (4)$$

When x is positive the video response rises at high modulation frequencies. It falls at high frequencies when x is negative.

To gain some idea of the order of magnitudes involved, let us assume a typical value of $x = \pm 0{\cdot}1$dB/Mc/s, $\Delta\theta = 2{\cdot}5°$/dB, and $f_m = 4$Mc/s (1 000 channel system). Under these circumstances,

$$A_t = 1 \pm (\pi/180) \times 0{\cdot}1 \times 2{\cdot}5 \times 4$$

$$A_t = 1 \pm 0{\cdot}0175\ (\pm 0{\cdot}15\text{dB})$$

Thus the video response may have a gain or a loss of up to 0·15dB at 4Mc/s.

In practice an amplitude slope x of 0·1dB/Mc/s is considerably worse than may be fairly easily achieved, although one must take into account the effect of ageing and misalignment due to thermal drifts.

It has been assumed, so far, that the frequency response of the circuits preceding the t.w.t.s has a constant slope. This again is not in general likely, and one must think in terms of an amplitude function $A(f)$, with important higher order terms.

$$\text{If } A = A_o + A_1(f - f_o) + A_2(f - f_o)^2 + \ldots \quad \ldots (5)$$

and the phase ϕ of the carrier is

$$\phi = \phi_o + \phi_1 A \quad \ldots\ldots\ldots\ldots (6)$$

the rate of change of phase with amplitude is

$$(d\phi/dA) = \phi_1 \text{ rad/V} \quad \ldots\ldots\ldots\ldots (7)$$

The relationship between ϕ_1 and the $\Delta\theta$ used in equation (1) is

$$\Delta\theta = (180/\pi)\, \frac{A_o\phi_1}{20 \log e} \quad \ldots\ldots\ldots\ldots (8)$$

since

$$\Delta\theta = (180/\pi)\, \frac{\delta\phi}{20 \log \dfrac{(A_o + \delta A)}{A_o}} = (180/\pi)\, \frac{\delta\phi}{20 \log e \,.\, (\delta A/A_o)}$$

$$\Delta\theta = (180/\pi) \cdot \frac{A_o\phi_1}{20 \log e} \cdot (\delta\phi/\delta A) \sim (180/\pi)\, \frac{A_o\phi_1}{20 \log e}$$

The phase response resulting from an amplitude response of the type given above is:

$$\phi = \phi_o + \phi_1[A_o + A_1(f - f_o) + A_2(f - f_o)^2 + \ldots] \quad \ldots. (9)$$

If the carrier has a sinusoidal frequency deviation

$$f - f_o = \Delta f \sin pt \quad \ldots\ldots\ldots\ldots (10)$$

the distortion caused by spurious phase modulation is:

$$1/2\pi\ (d\phi/dt) = (1/2\pi)\,[\phi_1 A_1\, \Delta f \cdot p \cos pt + 2\phi_1 A_2\, \Delta f^2 p \sin pt \cos pt + \ldots] \quad \ldots. (11)$$

and the spurious relative frequency deviations at the fundamental and second harmonic frequencies are consequently:

$$(H_1/\Delta f) = \phi_1 A_1 f_m \quad \ldots\ldots\ldots\ldots (12)$$

$$(H_2/\Delta f) = \phi_1 A_2\, \Delta f\, f_m \text{ where } f_m = (p/2\pi) \quad \ldots. (13)$$

Again one may here express the coefficients A_1, A_2 etc. in terms of slopes as above.

If x and y are the slopes of the amplitude response, in terms of the first order (linear) and second order (parabolic) variations expressed in dB/Mc/s and dB/Mc/s², then

$$x = \frac{20 \log \dfrac{A_o + \delta A}{A_o}}{\delta f} = \frac{20 \log (1 + (\delta A/A_o))}{\delta f} \quad \frac{20 \log e}{A_o} \cdot \delta A/\delta f$$

$$y = \frac{20 \log \dfrac{A_o + \delta^2 A}{A_o}}{\delta f^2} = \frac{20 \log(1 + (\delta^2 A/A_o))}{\delta f^2} \sim \frac{20 \log e}{A_o} \cdot \delta^2 A/\delta f^2$$

and

$$x \sim \frac{20 \log e}{A_o} A_1 \quad \ldots\ldots\ldots\ldots (14)$$

$$y \sim \frac{40 \log e}{A_o} A_2 \quad \ldots\ldots\ldots\ldots (15)$$

therefore

$$H_1/\Delta f = (\pi/180)\, \frac{20 \log e}{A_o}\, \Delta\theta \cdot \frac{A_o}{20 \log e} \cdot x \cdot f_m = (\pi/180)\, \Delta\theta \cdot x \cdot f_m \quad \ldots\ldots (16)$$

$$H_2/\Delta f = (\pi/180)\, \frac{20 \log e}{A_o} \Delta\theta \cdot \frac{A_o}{40 \log e}\ y \cdot \Delta f \cdot f_m = (\pi/360)\, \Delta\theta \cdot y \cdot \Delta f \cdot f_m \quad \ldots\ldots (17)$$

Assuming that the response curve is an exact parabola and that it falls by 1dB, below the mid-frequency response, at the edges of a 20Mc/s bandwidth, the value of y is 10^{-2}dB/Mc/s². For the parameters assumed above, and $\Delta f \simeq 1{\cdot}8$Mc/s, one would expect

$$H_2/\Delta f = (\pi/360) \times 2{\cdot}5 \times 10^{-2} \times 1{\cdot}8 \times 4$$

$$H_2/\Delta f = 1{\cdot}57 \,.\, 10^{-3}\ (-56\text{dB})$$

An alternative way of expressing the distortion created by a.m. to p.m. conversion is to regard is as causing a change in group delay. This quantity may be expressed as

$$d\phi/d\omega = (\partial\phi/\partial\omega) + (\partial\phi/\partial A) \cdot (dA/d\omega) \quad \ldots\ldots (18)$$

It has been seen already that

$$(\partial\phi/\partial A) = \phi_1 (\pi/180)\, \frac{20 \log e}{A_o}\, \Delta\theta$$

$$(dA/d\omega) = (1/2\pi)\ (dA/df) = (1/2\pi)\ (A_1 + 2A_2\Delta f + \ldots)$$

$$= 1/2\pi \left[\frac{A_o}{20 \log e}\, x + \frac{A_o}{20 \log e}\, y \cdot \Delta f + \ldots\right]$$

Therefore

$$(d\phi/d\omega) = (\partial\phi/\partial\omega) + (\Delta\theta/360)\ (x + y\Delta f + \ldots)10^3 \text{m}\mu\text{sec.} \quad \ldots\ldots\ldots (19)$$

The constant slope x in the amplitude response results in a fixed increase of group delay $\Delta\theta x/0{\cdot}360$, while a parabolic shape defined by y results in a skewness in the group delay characteristic of slope $\Delta\theta \cdot y/0{\cdot}360$.

If $x = 0{\cdot}1$dB/Mc/s, $y = 0{\cdot}01$dB/Mc/s² and $\Delta\theta = 2{\cdot}5°$/dB, then the fixed increase in group delay is

$$d\phi/d\omega = \frac{0{\cdot}1 \times 2{\cdot}5}{0{\cdot}360} = 0{\cdot}25/0{\cdot}36 = 0{\cdot}7\text{m}\mu\text{sec}$$

and the slope of the characteristic

$$d^2\phi/d\omega^2 = \frac{0{\cdot}01 \times 2{\cdot}5}{0{\cdot}360} = 0{\cdot}07\text{m}\mu\text{sec/Mc/s.}$$

The figures for second harmonic distortion and skewness

of group delay appear to be consistent with one another and they both indicate that the resulting intermodulation distortion in a 1 000 channel system would be just tolerable.

Tests taken on an all t.w.t. repeater loaded with a 600 channel noise signal have shown that the equivalent noise power ratio is practically independent of the output power of the repeater, over a range of +3dB to −10dB relative to saturation power.

The direct measurement of a.m. to p.m. conversion, in a travelling wave tube, is a difficult operation even if the relatively simple method indicated in Ref. 3 is used. Unless a very high degree of accuracy in the measurement of relative levels can be obtained, this method gives unreliable results.

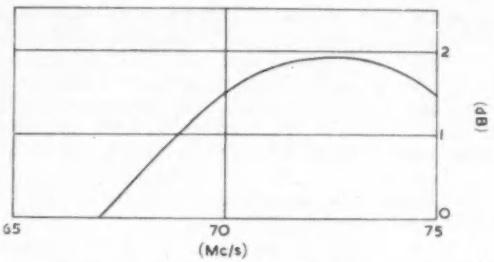

Fig. 12(a). Overall amplitude characteristic at low level

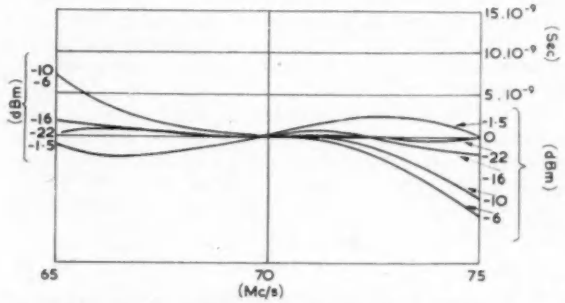

Fig. 12(b). Overall group delay characteristic at various input levels to the travelling wave tube

An alternative method consists in measuring the group delay of a transmission system, including a travelling-wave tube and a phase equalized narrow band circuit, arranged as shown in Fig. 11. The results of some early measurements, which are given in Figs. 12(a) and 12(b), illustrate vividly the change in group delay characteristic, with magnitude of drive to the travelling wave tube.

There are, of course, several ways of minimizing the effects of a.m. to p.m. conversion. The amount and the phase of the a.m. is not, in general, the same from hop to hop, since it is generated within each repeater by the slight misalignments which are bound to occur throughout the working life of the component. It is therefore to be expected that there will tend to be a smoothing out, or cancellation, of the a.m. to p.m. effects from one hop to the next. The major distortion occurs at high frequency and it is possible to insert automatically controlled amplitude and group delay equalizers, at selected points, to give the necessary correction.

However, it is preferable, for the sake of simplicity, to operate all tubes 5 to 10dB below their saturation level, when an order of magnitude reduction in a.m. to p.m. conversion may be gained. This mode of working may be arranged fairly readily with the low noise and intermediate tube, although even with the latter, it may be necessary to strike a compromise with the a.g.c. requirements. It is not in general practicable to operate the power tube as much as 10dB below saturation level and other palliatives have to be resorted to in this case.

One of these consists in amplifying and feeding back to the helix in the appropriate phase, the a.m. ripple existing at the output of the travelling-wave tube. This produces an opposing phase modulation which may be made to cancel out the internally generated one. The gain required in the feedback amplifier is quite low (of the order of 20 to 25dB), as the phase sensitivity of the helix in a medium power tube is of the order of 2°/V. At this value of gain, the feedback amplifier is capable of providing a very wide bandwidth without any difficulty, and a reduction in the level of a.m. to p.m. conversion by an order of magnitude is quite feasible. Since the helix phase modulation sensitivity of the intermediate tube is up to five times higher than that of the output tube, the gain of the feedback amplifier can be reduced appreciably if the control voltage is applied earlier in the chain

It is known that the slope of the phase versus amplitude curve in a travelling-wave tube changes sign beyond saturation. It follows that some degree of cancellation may be obtained by operating the intermediate tube slightly above the saturation level and the power tube slightly below. Also, provided adequate gain has been made available, the power tube could well be operated slightly beyond saturation, where the phase modulation sensitivity falls to zero. The penalty in terms of power output, which is less than 1dB in this mode of operation, should be quite tolerable.

Recently[4] medium power travelling-wave tubes have been built with two helices of different pitches, placed end to end, within the same envelope. The saturation characteristic of a tube of this construction is much more gradual and the difference between low level and saturation gain is only 3dB, as against 7 to 8dB for a conventional tube with uniform helix. The linear gain range is therefore greatly extended and it is anticipated that a lower a.m. to p.m. conversion factor may thereby be achieved at a high power output.

Group Delay Equalization

Apart from the effect of compression within the tubes the other sources of group delay variations, in a non-demodulating repeater, are the microwave filters and the aerial feeders.

The items peculiar to all t.w.t. repeaters are the microwave filters, of which there are between four and six. These are normally adjusted on a swept reflection coefficient instrument, when a v.s.w.r. of under 1dB, over a band of ±10Mc/s, and under 0·25dB over a central bandwidth of ±5Mc/s, is readily obtained.

Because the bandwidth of microwave filters is a very small proportion of the centre frequency, a maximally flat amplitude response allied to a symmetrical group delay response is generally obtainable. The theoretical group delay responses of four and five cavity, maximally flat filters, tuned to 2 000Mc/s, are shown in Fig. 13. Measurements on actual filters, aligned on an impedance basis, show group delay variations approximately equal to the theoretical figures as indicated in Fig. 14.

Group delay curves such as those of Fig. 13 and Fig. 14 are equalized quite readily at i.f. or at microwave frequencies. It is preferable to equalize the delay of repeaters on an individual basis, and in the case of t.w.t. repeaters this should be done at radio frequencies. The advantage of radio frequency equalizers is that their thermal drift may be made to compensate for the thermal drift of the

filters and, because their group delay response is very symmetrical, they may be made to match the delay response of the filters quite accurately.

A simple type of r.f. group delay equalizer consists of a 3dB coupler terminated in a pair of cavity resonators at two of the conjugate arms, 2 and 3. It can be shown that the network between the other pair of conjugate arms, 1 and 4, behaves as an all pass quadripole, the phase characteristic of which is that of the terminating resonators.

By adjusting the tuning and the coupling (loaded Q's) of the resonators, a wide range of group delay responses may be obtained. A simple way of adjusting the loaded Q of the resonators, when these are of coaxial construction, is to interpose a variable quarter-wave transformer, made up of a rotatable strip line, between the resonators and the 3dB coupler.

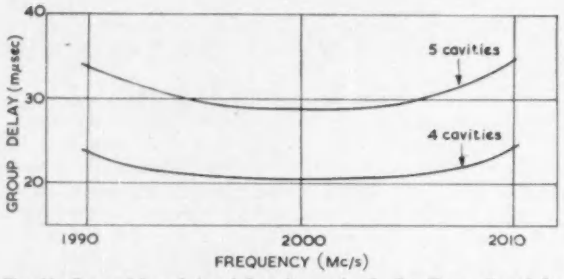

Fig. 13. Group delay of 4 and 5 cavity maximally flat filters adjusted for a return loss of under 26dB over a bandwidth of 20Mc/s

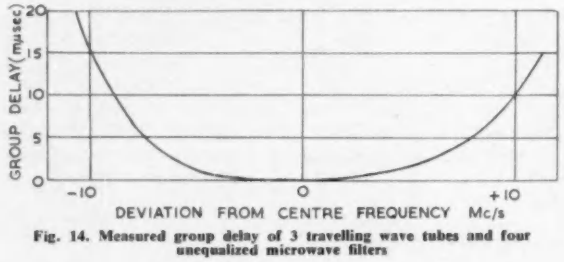

Fig. 14. Measured group delay of 3 travelling wave tubes and four unequalized microwave filters

Discussion

The topics discussed in the preceding paragraphs indicate that all-travelling-wave tube repeaters meet all the specific requirements of microwave link work, including the intermodulation requirements of multi-channel telephone transmission, (at least 600 channels) and 625 line television. Further investigations are necessary in order to extend their transmission capabilities to 2 000 channels and over.

Travelling-wave tubes there must be in any case, whether one is thinking of i.f. or all-t.w.t. repeaters. Admittedly, improved microwave triodes are now available for use at frequencies up to 4 000Mc/s, but they represent, at best, a difficult compromise and the microwave circuits which they require are complicated and expensive to manufacture. A typical example illustrating the use of these triodes is given in Ref. 10, where it is found necessary to use as many as three stages to provide an overall gain of 30dB with an output power of 1·5W. A single travelling-wave tube designed for link work provides 35 to 40dB gain, at an output power of 10W. Compared with i.f. repeaters, all-t.w.t. types score on the ground of simplicity, reliability and cost.

If, now, one examines Figs. 2 and 4, and assuming that the output stage of an i.f. repeater is a travelling-wave tube, the following table can be prepared, in which a comparison is made of the equipment (excluding some common items) involved in t.w.t. and i.f. repeaters:

All T.W.T. Repeater	*I.F. Repeater*
Low noise tube	Low level microwave mixer
Microwave filter	Low level i.f. amplifier
Intermediate t.w.t.	High level i.f. amplifier
High level microwave mixer	High level microwave mixer
Crystal controlled v.h.f. local oscillator	Crystal controlled v.h.f. local oscillator
	Microwave local oscillator
	High level microwave mixer
	Microwave filter

It is clear from this table that, in the case of the basic non-demodulating repeater, the t.w.t. type involves less equipment, is considerably more economical in valves and, provided the t.w.t. focusing field is supplied by permanent magnets, is far more economical in power consumption. All these factors add up to a considerable increase in reliability in favour of the t.w.t. type, particularly when one realizes that the number of working valves in the actual signal path is so much smaller than in the i.f. type, and that the life of well-designed travelling-wave tubes is normally of the order of 10 000 hours or more.

The same conclusions may be derived by comparing Figs. 3 and 5.

In addition to these features, the normal drift in the group delay characteristic of t.w.t. repeaters may be more easily compensated, since the equalization circuits are of the same nature and they operate at the same frequencies as the microwave filters. This is not altogether the case with the i.f. repeaters.

Finally, the very large bandwidth of the t.w.t. allows two-way working in a one-way repeater when one of the signals, because of its narrow bandwidth (supervisory or small number of telephone channels), need not be transmitted at the full carrier level. Further work holds the possibility of achieving two-way working on broad-band signals.

Conclusion

It has been shown that all t.w.t. repeaters are capable of meeting all the known requirements of long haul microwave links and that they are superior to the i.f. type in terms of simplicity and reliability. When travelling-wave tubes are specially designed for this application, this type of repeater should also be more economical in terms of initial outlay and running cost.

Acknowledgments

The author wishes to thank the Engineer-in-Chief, Marconi's Wireless Telegraph Co. Ltd., for permission to publish this article, and his colleagues at the Baddow Research Laboratories and at the Writtle Development Laboratories who have contributed in providing some of the theoretical and experimental results quoted.

REFERENCES

1. FEDIDA, S. Wideband Microwave Transmission Systems. *Point to Point Telecommun. 1*, No. 3 (June, 1957).
2. KOMPFNER, R. The Travelling-Wave Tube Centimetre-wave Amplifier. *Wireless Engr. 124*, 255 (1947).
3. LAICO, J. P., MCDOWELL, H. L., MOSTER, C. R. A Medium Power Travelling Tube for 6000mc Radio Relay. *Bell Syst. Tech. J. 35*, 1285 (Nov., 1956).
4. KLEEN, W. Les Tubes Hyperfréquence pour un Faisceau Hertzien a Large Bande. *L'Onde Electrique. 37*, 894 (1957).
5. COULSON, R. B. General Review of Travelling Wave Tubes. *Electronic Engng. 30*, 302 (1958).
6. BRAY, W. J. The Travelling Wave Tube as a Microwave Phase Modulator and Frequency Shifter. *J. Instn. Elect. Engrs. 99*, Pt. 3, 15 (1952).
7. MENDAL, J. T., QUATE, C. F., YOCOM, W. H. Electron Beam Focusing with Periodic Permanent Magnet Fields. *Proc. Inst. Radio Engrs. 42*, 800 (1954).
8. CHANG, Kern K.N. Periodic Magnetic Field Focusing for Low Noise Travelling Wave Tubes. *RCA Rev. 16*, 423 (1955).
9. BEAM, W. R., BLATTNER, D. J. Phase Angle Distortion in Travelling Wave Tubes, *RCA Rev. 17*, 86 (1956).
10. ANDRIEUX, G. Amplifications de puissance a triodes pour 4 000Mc/s. *L'Onde Electrique. 37*, 777 (1957).

Portable U.H.F.-S.H.F. Links

In the BBC Television Service

By T. H. Bridgewater*, M.I.E.E.

The following article discusses the applications of u.h.f. and s.h.f. radio links for television outside broadcast purposes. These links are used in large numbers and to ensure efficiency must be provided with specialized auxiliary and test equipment. There is particular reference to a new BBC-designed 600Mc/s f.m. link, the first of its kind to come into service.

RADIO links are used by the BBC Television Service in connexion with television programmes whenever the equivalent circuit (whether cable or radio) facilities are unavailable from Post Office resources. They may be required for any or all of the following purposes, jointly or separately:

(1) Carrying vision signals over some or all of the distance between the camera site and nearest convenient point of connexion with the national vision network.

(2) Carrying sound signals over some or all of the distance between the microphone at the camera site and the nearest convenient point of connexion with the Post Office or BBC network.

(3) Providing communication for controlling the vision or sound when either or both of these are being conveyed by radio link. Such communication links would usually operate in both directions.

(4) Various short-range applications to replace cables which otherwise would restrict the movement of equipment and personnel either in a studio or, more often, on the site of an outside broadcast. Examples would be:—

(*a*) Radio microphone. This is the case where the microphone is being worn or carried by, say, a commentator who requires freedom of movement without trailing a cable behind him.

(*b*) The equivalent facility applied to a small hand-held television camera.

(*c*) Communications—usually two-way—with each of the above, and also for sundry other local purposes, such as between the Stage Manager in a television studio and his producer in the adjacent control room.

For applications of this kind the range would be measured in hundreds of yards rather than miles.

Types of Link

Many types of radio link are in use for these various purposes with frequencies in the v.h.f., u.h.f. and s.h.f. ranges. Power outputs vary but are usually of the order of a few watts, with a reliance on aerial gain to increase the e.r.p. whenever necessary.

Vision Links

It is simplest to discuss these by frequency ranges.

S.H.F.

The greatest number of links falls into this category. The principal frequencies at present in use are in the range 4 400 to 4 800Mc/s approximately. These allocations are not permanent and later it will be necessary to move to the officially assigned region of 7 050 to 7 300Mc/s. Two main types of equipment are in regular use, viz.: E.M.I., types ML6A, ML6B, ML6C (Fig. 1) and the S.T. & C. type.

These are lightweight portable transmitters and receivers and the aerial system uses paraboloids 4ft in diameter having a beamwidth of $\pm 2\frac{1}{2}°$ to the half-power points. These aerials are fitted on panning heads which, in turn, are carried on substantial metal tripods. The aerials can be traversed through 360° and accurately orientated to within $\frac{1}{2}°$. The gain of each reflector with respect to an isotropic aerial is 33dB. The equipments are divided into separate units for accessibility, ease of handling and convenience of transport. In the case of the E.M.I. ML6A and ML6B equipments, the head units are mounted in front of the paraboloid, but both the new ML6C and existing S.T. & C. equipments have head units mounted on the rear of the paraboloid. The transmitter

* *The British Broadcasting Corporation.*

head units containing the oscillator and modulator are connected to the control and power supply units by means of multi-core cable up to 200ft in length. The receiver head unit, containing the s.h.f. local oscillator, mixer and i.f. pre-amplifier, is similarly arranged and the output from the i.f. pre-amplifier is brought down in a coaxial cable built into the multi-core cable, which connects with the receiver control, discriminator and power supply units. The intermediate frequency used in the ML6A and ML6B equipments is 115Mc/s, in the ML6C is 120Mc/s and in the S.T. & C. equipment it may be 30 or 60Mc/s.

The performance of these equipments complies with the BBC's minimum specification and, in particular, with respect to:—

(*a*) H.F. response which, with reference to 10kc/s, falls within ± 0·2dB up to 1Mc/s and ± 0·5dB between 1Mc/s and 3·5Mc/s.

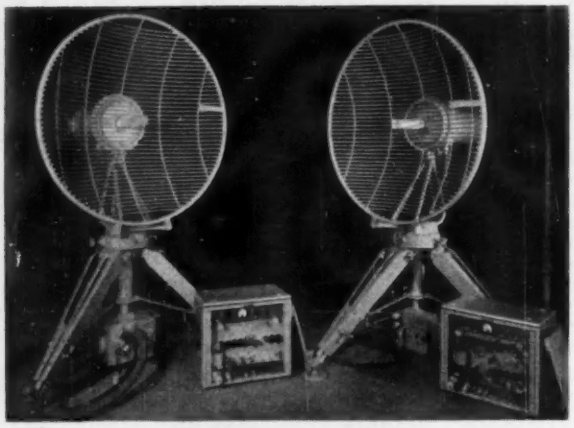

Fig. 1. E.M.I. ML6C equipment

(*b*) Signal-to-noise ratio which, expressed as

$$20 \log \frac{\text{D.A.P. Signal}}{\text{R.M.S. Noise}}$$

is not less than 58dB over a free-space transmission path of 40 miles.

(*c*) Group delays and differential phase characteristics which allow the satisfactory transmission of N.T.S.C. colour waveform (as modified to the British standard) even when as many as four links are connected in tandem.

A third type of s.h.f. equipment may be mentioned which, although not used in large quantities, nevertheless performs the important function along with two u.h.f. channels referred to later, of conveying Eurovision programmes in either direction across the English Channel. Eventually this service will be the responsibility of the Post Office (with different equipment and location) but since 1954 the BBC and R.T.F. (Radiodiffusion-Télévision Française) have been jointly responsible for the cross-Channel circuit which operates between Swingate (near Dover) and Cassel (Nord)—a distance of 56 miles.

This equipment, operating on a frequency of 3 750Mc/s, was installed by the French firm of Télécommunications Radioélectriques et Téléphoniques on behalf of Radiodiffusion-Télévision Française. A 3-metre paraboloid and launching unit, mounted at the 50ft level, is connected to the ground equipment via a length of waveguide. The transmitter uses a type CZ klystron with an output power of 10W. The receiver, local oscillator, mixer and i.f. pre-amplifier operate in a similar fashion to that on the ML6C and S.T. & C. television o.b. equipment.

U.H.F.

This is a comparatively new field but one of great value for several purposes. Two main frequency bands are being used for television links, viz.: 522Mc/s to 660 Mc/s (Band V) and 1 700Mc/s to 2 300Mc/s. For the former band, an f.m. link has recently been specially designed by the BBC[1]. This has superseded the use of v.h.f. which is largely having to be surrendered to broadcasting purposes. The advantages of lower frequencies such as these, as compared with s.h.f., are:—

Lighter and simpler aerials, with greater beam-width.

Less serious fading on difficult paths.

This link is used mainly for portable outside broadcast purposes but also for certain fixed links such as Isle of Man—Belfast as well as forming another channel between Swingate and Cassel (Eurovision), in which latter case special aerial systems are employed.

A schematic of the transmitter, which employs frequency modulation, is shown in Fig. 2. This consists of three units: the modulator, frequency changer and u.h.f. stages.

The video input signal of about 1V d.a.p. can be connected either directly to an amplifier which precedes the modulator or through a black level clamp. The output from the amplifier is d.c.-restored in order to restrict the overall peak-to-peak voltage change of the video signal with picture content, and is used to control the reactance value of a frequency modulated phase-shift oscillator. The frequency modulated output signal with a centre frequency of about 60Mc/s has a deviation

Fig. 2. Schematic of B.B.C. U.H.F. transmitter

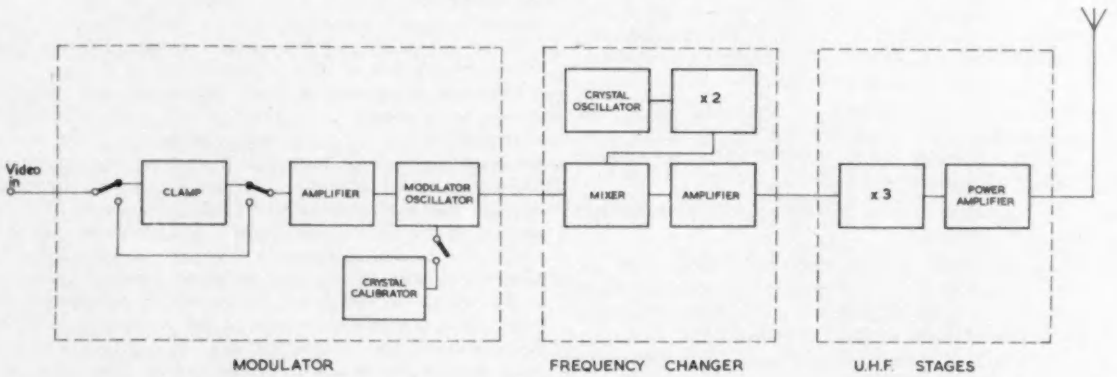

of 2Mc/s between the bottom of the synchronizing pulses and peak white at a level of 1mW.

The second unit incorporates the drive which is derived from an oscillator employing an overtone crystal operating at about 75Mc/s. After doubling this frequency, the output is fed into a valve mixer stage at a level of about 50mW together with the f.m. signal from the modulator after a single stage of amplification. The upper sideband of the mixer output is selected and the level raised to about 4W in an amplifier having a sensibly flat response over a 6Mc/s band in the range of 200 to 230Mc/s depending upon the channel in use. At this point the deviation is still 2Mc/s.

The third unit comprises two u.h.f. stages, which use planar triodes of the inverted lighthouse type in grounded grid circuits. The valves operate in coaxial cavities which are silver-plated in order to obtain a high Q. They are cooled by an air blast. The first stage multiplies the frequency by a factor of three with a power gain of unity, to drive the final which operates as a class-C amplifier and gives an output of about 17W into the feeder and aerial system. After tripling, the deviation is 6Mc/s in the band 620 to 680Mc/s with an overall 3dB bandwidth of about 12Mc/s.

A monitor, which will operate at either v.h.f. or u.h.f., gives a video signal from the modulator or transmitter output respectively, enabling the operator to check the signal.

A flexible feeder, which has an impedance of 50Ω and a loss of about 3dB/100ft, is used to connect the transmitter output to the aerial. Two types of aerial have been developed, a corner reflector, having a half-power beamwidth of 30° and a six-element Yagi aerial with about the same beamwidth. The gain of both is about 9dB relative to a dipole. Horizontal polarization is normally employed.

For permanent receiving installations a higher gain corner reflector has been developed. This has a measured gain of 12dB.

Fig. 3 shows a schematic of the receiver which also consists of three units: the head, i.f. amplifier and demodulator.

In order to keep the receiving aerial feeder as short as possible to reduce losses the head unit is built into a weather-proof box so that it can be mounted as close to the aerial as practical. This unit contains input band-pass filters, u.h.f. local oscillator, crystal mixer and pre-if. amplifier. Either a 30 or 60Mc/s i.f. can be used depending on local site conditions. The local oscillator uses a planar triode in a quarter-wavelength coaxial cavity and it has been designed to keep frequency drift within the limits needed by the main receiver. The receiver noise figure is 14dB.

A multi-core cable connects the head unit to the main i.f. amplifier. As well as the incoming frequency modulated i.f. signal, this cable carries power, signalling, metering and telephone circuits. The limiter-discriminator following the i.f. amplifier delivers a 1V peak-to-peak video signal into a 75Ω load. These two units are exactly the same as those employed in 4 000Mc/s microwave o.b. link equipment currently in service and are commercially available.

The units which comprise the transmitter and receiver are mounted in portable cases. The weight of each individual unit has been kept to a minimum and electronic smoothing is used in the power supplies to reduce their bulk.

2 000Mc/s U.H.F. Equipment

This forms another cross-channel link between Swingate and Cassel and uses G.E.C. u.h.f. main line television link equipment with the addition of a travelling-wave amplifier which raises the nominal power output from 2 to 20W. A transmitter and two receivers are installed at each terminal. Three separate paraboloid aerials are used: the first, 8ft in diameter, located at 50ft, the second, 12ft in diameter at approximately 90ft and the third, 12ft in diameter at 200ft.

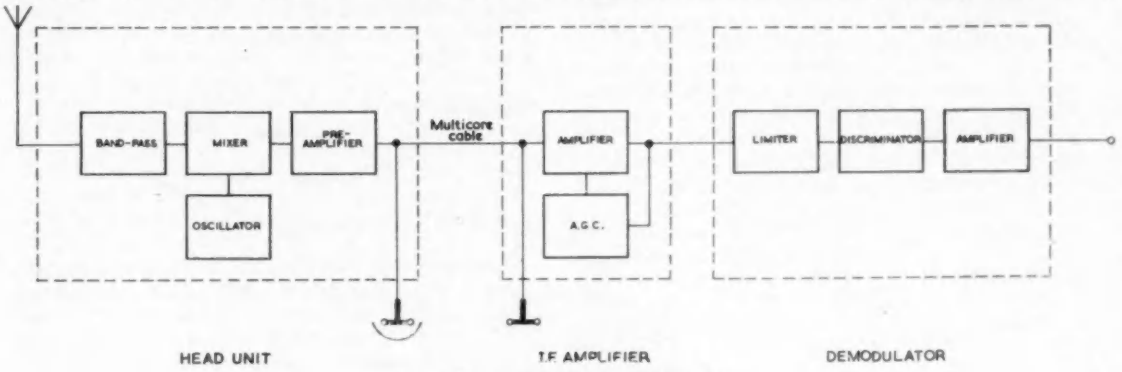

Fig. 3. Schematic of B.B.C. U.H.F. receiver

The aerials are illuminated by a short section of waveguide at the focal point and are connected to the ground equipment by means of helical membrane aluminium sheathed coaxial cables. It is possible to connect either transmitter or receiver to any of these aerials. Normally, when the transmission circuit is incoming from Cassel both receivers are connected to the first and second aerials; the distance between these representing the correct diversity spacing for an improvement in the signal-to-noise during fading conditions. For the outgoing circuit to Cassel, the transmitter is usually connected to the middle aerial. The upper aerial is mainly used in the summer time and during long spells of hot weather, when conditions of super-refraction reduce the usefulness of the lower systems. This link is mainly used to transmit from the British standard 405 lines to the Continental 625 lines, a conversion which is now carried out at Swingate; this 625 line picture is distributed to most Western European television networks except France. A return circuit using similar equipment is provided from Cassel so that simultaneous transmission may take place if required.

COMMUNICATIONS

These fall broadly into long-range and short-range.

Long-range

Such links are mainly used for ensuring parallel communication between the two ends of a cross-country vision link. Principal equipments in use are:—Mullard, type GFE 506 and G.E.C. type BRT 143/163.

Both these equipments use f.m. and have an output power of about 12W. Simple unipole aerials are generally used.

The mode of operation is normally two-way simplex. There is a shortage of frequencies for these links, which are distributed over Band I and Band II. Both Bands of course are also used for vision or sound broadcasting so frequencies have to be carefully chosen according to locality.

Because of the congestion in the v.h.f. range, the BBC is experimenting with communication links operating at u.h.f. within the band 660 to 665Mc/s. These will require optical transmission paths and far more care with aerial installations, but in the long run may well prove the best solution to the problem. It is also intended that these equipments should be used for programme links (sound) when required. These links are being built by Mullard to a strict specification which, among other things, calls for the r.m.s. signal/r.m.s. noise ratio to be 50dB when measured over a thirty-mile path with propagation conditions corresponding to 'free space'.

Short-range (vision or sound)

A variety of miniature equipments are used as the control link associated with radio microphones, radio cameras, etc. For the most part, such links are either BBC 'home-made' or are made up from an assortment of commercial units. F.M. is usually employed and, as for the long-range links, the frequencies will fall in either Band I or Band II. Transmitter output power would usually be only a few watts or less.

SOUND PROGRAMME

The need for links to carry the sound component of a television programme arises much less frequently than in the case of the vision, but transmissions from cars, ships, aeroplanes, etc., call for high-quality radio circuits for which special equipment must be held. The problem is very similar to that of the communication links: the same wavebands are used and largely the same type of equipment, though modified to ensure a higher quality performance.

Special and Auxiliary Equipment

Apart from the essential transmitters and receivers, a good deal of additional equipment is necessary to ensure that portable radio links can be got working in a speedy and efficient manner. Among the more important items are the following.

MAST-HEAD RECEIVERS

It is frequently convenient to exploit the great height of the masts of many of the television broadcast transmitters as reception points for television radio links, particularly at those stations provided with a permanent connexion back into the network. The advantage of, say, a 600ft aerial height for an s.h.f. link requiring an optical path will be easily understood. A probability contour showing the s.h.f. transmitter boundary for a single hop into the Sutton Coldfield s.h.f. receiver is shown in Fig. 4. It would, however, be next to impossible to hoist and install 4ft paraboloids and head units on every separate occasion and so it has been found worthwhile to install permanent s.h.f. mast-top receivers at some dozen of the BBC transmitting stations.

Fig. 4. Range contour. S.H.F. transmitter working into mast-head receiver at Sutton Coldfield

The problems of ensuring the reliability of such equipment all the year round have called for meticulous design and experiment, but the latest version produced to BBC specification is proving eminently satisfactory. It consists of: (1) two 4ft paraboloids remotely controlled (2) a waveguide change-over switch enclosure, and (3) a receiver cubicle, all mounted at high level on the mast.

The paraboloids and slewing units are mounted on a platform which forms part of the mast structure. These platforms are fitted on opposite faces of a rectangular mast and adjacent corners on a triangular mast. Each paraboloid is mounted on a specially designed slewing unit and the whole assembly is produced to stand the hazards of weather and wind loading in exposed places. Radial heater elements are

incorporated in each slewing unit assembly to prevent ice building up on the turntable. It is possible to traverse each aerial through 270° by remote control from the ground and accurately orientate this to within $\pm \frac{1}{2}°$ of any desired setting; the actual azimuthal position is registered by a magslip indicator on the remote control panel at ground level.

Each aerial is connected to the waveguide switch and receiver cubicle by a length of waveguide and a short flexible cable. This cable introduces a loss of 0·5dB at about 4 500Mc/s, but enables the paraboloid to be traversed without the complication of waveguide rotating joints.

The waveguide run from each paraboloid terminates on a two-pole waveguide changeover switch which is installed at a convenient place on the mast and the operation of which is remotely controlled. Both outlets from this switch are connected again through a very short length of guide to the s.h.f. receiver cubicle in which two complete local oscillator, mixer and i.f. pre-amplifiers are fitted. The tuning cavities of the local oscillators are motorized and a magslip transmission system is used to indicate the position of the tuning from the control point. The outputs from the pre-amplifiers (which are centred at 30 or 60Mc/s) are connected to the main i.f. amplifiers and discriminators situated at ground level, through a length of coaxial cable. The i.f. pass-band is 20Mc/s and as the equipments are operating in the strong field of the main television transmitter special precautions are necessary and much care has been taken in the design of filters in all the supply leads, screening, etc. The system, as designed, permits two complete and independent receiver chains to be operated simultaneously or either chain may be switched and held as reserve for the other.

A feature of this equipment is that each unit in the receiver cubicle may be removed and replaced by a spare, should a fault develop. Full metering and supervisory circuits are also included and care has been taken to select valves and components which should have an exceptionally long life.

Portable masts and Towers

Where permanent masts or other convenient high points are not available—and this will be the case more often than not—recourse must be made to suitable means of achieving adequate aerial height at both the transmitting and receiving end of a link. High buildings, water towers, hill tops, etc., are often used for this purpose. Of course, they are not always conveniently to hand and even if they are a great deal of time and effort may be needed in both securing the necesary permissions and then raising and installing the equipment. It has therefore been found indispensable to develop portable telescopic masts and towers which can rapidly elevate an aerial or paraboloid to clear local houses, trees or other obstructions. The BBC uses two main types of such apparatus, namely:—

(*a*) an extensible mast, built like a fire-escape ladder;

(*b*) a telescopic tower.

The former, manufactured by Merryweather Ltd is mounted on a vehicle which also embodies a cabin that houses the radio equipment. The mast can be raised by engine power in a few minutes to a height of over 100ft. Guys are not essential in fair weather and this is an important point since the mast may often be installed on hard ground into which stakes could not be driven. This type of mast is, however, liable to twist and sway very slightly in the wind and this feature renders it unsuitable for s.h.f. paraboloids whose beam width is only a few degrees. It is therefore used for v.h.f. and u.h.f. aerials and for such applications is extremely effective.

Radio Link Vehicle

Since most of the radio links used in the BBC are temporary and being continually moved from place to place, mobility and efficiency are of the greatest importance and the mobile masts referred to above have, of course, been designed to such ends. Another contribution has been the careful development of a special radio link vehicle (see illustration on page 291). This vehicle is in effect a mobile cabin which both transports the equipment and then provides an 'operations centre' on site. Apart from aerials, paraboloids, etc., the link equipment can remain inside the vehicle and so the amount of local installation work is reduced to an absolute minimum. For those occasions where, for one reason or another, it may be impracticable to operate from the vehicle itself—for example, when the equipment is required on board ship—all units can readily be detached, carried from the vehicle and reinstalled elsewhere. All the technical equipment is accommodated in transit cases where possible and located on resiliently mounted shock-proof trays. The ancillary equipment associated with the radio terminal repeater station, such as paraboloids, panning heads, tripods, cables, cable drums, rigging tackle, etc., are carried in compartments or lockers which give access to these items from within or outside the vehicle as circumstances require. The roof platform will support a load consisting of two 4ft paraboloids, tripods and panning heads; special clamps are fitted in the appropriate positions to fasten the tripods to the roof. Stabilizing jacks are provided which allow the chassis of the vehicle to be supported firmly above the springs.

The essential transmitter and receiver equipment, together with test signal generator, picture monitor, distribution amplifier, jackfields, radio/telephone communication equipment and so forth, are arranged so that these are within easy reach and view of the operator.

The same vehicle can be used for a transmitting point, receiving point, or as an intermediate repeater. As the vehicles may have to spend long periods in exposed places under adverse weather conditions, the needs and comforts of the operating staff have been a fundamental consideration in planning the layout and facilities. Adequate heating and ventilation systems are installed and a water supply for domestic purposes is included.

Towing attachments at the rear of the chassis enable a trailer-mounted diesel generator to be coupled up if required.

Mobile Power Units

Radio links are often set up in remote places where mains power is unavailable, and so the BBC has equipped itself with a number of mobile power units. These are diesel-alternators, manufactured by Auto-Diesels Ltd, and mounted on a trailer for towing behind the radio link vehicle.

Transmission Monitor

The need frequently arises, especially under fault conditions, to check that the modulated s.h.f. picture signal is being transmitted satisfactorily. Occasions arise when some doubt exists as to whether the fault lies in the transmitter equipment or the receiver equipment, and therefore a transmission monitor has been specially developed. It receives a small portion of the microwave signal, demodulates it and supplies a video output which can be adjusted to the standard 1V peak-to-peak level. The unit consists of a small tunable cavity which is clamped to the face of the paraboloid: a silicon crystal is coupled to the cavity to demodulate the signal which is passed to the control unit at ground level by means of a length of coaxial cable. The frequency of the cavity is de-tuned to a value which is 0·707 of the transmitted carrier frequency so that it acts as a simple frequency modulated discriminator.

The unit is enclosed in a weatherproofed cast box; for the newer portable link equipment provision is made on the paraboloid mounting to locate this head unit in the optimum position.

S.H.F. Path Simulators

Because of the high aerial gain in an s.h.f. system, the testing of the overall transmission characteristic of the link presents considerable difficulty. If tests between transmitter and receiver were carried out within a building, reflections from adjacent walls and objects would produce most erroneous and peculiar results. In order to overcome these difficulties, a device which is now called a 'path simulator' was developed and this permits a complete link to be tested at base under conditions simulating path lengths of up to forty miles. This consists of waveguide matching stubs to which the head units are attached and correctly terminated, together with waveguide-to-coaxial transformers which enable a finite length of coaxial cable to connect the output from the transmitter head unit through a suitable variable attenuator system to the receiver head unit. The loss introduced into the system by means of the path simulator has been calibrated to provide identical conditions to those when using the link with 4ft paraboloids between fixed points varying from five to sixty miles in length. Full-scale tests can thus be made and overall checks of the equipment carried out without the need to check the equipment over an actual path.

Coverage and Exploitation

Radio links play an important and essential part in the organization for bringing television and sound from points remote from the permanent contribution network. If necessary, by using a sufficient quantity of links in tandem, pictures could be collected from almost any point in the British Isles. The use of two or three links in tandem is quite common practice. Four and five together are by no means unknown and such a number would suffice to reach most parts.

In 1957 nearly 1 000 vision links were established for actual broadcasts, either singly or as part of longer chains, while additional equipment now coming into service will probably increase the number in the present year. This does not take into account the almost daily use of certain point-to-point links being provisionally operated by the BBC pending replacement by a Post Office service; examples being the Anglo-French link, Isle of Man-Belfast, Glasgow-Kirk o'Shotts.

Special Problems

The ordinary run of cross-country radio link presents chiefly the problem of achieving a line-of-sight path; provided this is secured, together with adequate Fresnel zone clearance, satisfactory circuits can usually be established, up to some fifty miles per 'hop'. More difficult conditions do, however, present themselves in cases of transmission across water and transmission from moving sources (e.g., ships, cars, aeroplanes, etc.).

Transmission Across Water

For reasons that are well known, transmission paths over water on u.h.f. and s.h.f. links are liable to fade in certain circumstances. Such paths are often encountered as a result of the many estuaries and islands around the British Isles, and so when links have to be established over more than a mile or two of water it is usually desirable to take special precautions to alleviate fading. The usual remedies, adopted either singly or in combination, are:—

(*a*) To use as low a frequency as possible. For example, a u.h.f. link on 659Mc/s would be safer than an s.h.f. link on 4 500Mc/s.

(*b*) To use space-diversity reception by installing two receivers at different levels.

(*c*) To ensure a signal strength high enough to allow a reasonable fading margin.

(*d*) To use frequency diversity by setting up duplicate links widely spaced in frequency.

(*e*) To take special care in the siting of the transmitting and receiving aerials in relation to local topography, and particularly to avoid reflection from the water by arranging for the reflection point to fall on land. (This technique has been used with success on the cross-Channel Eurovision circuit and between Snaefell (Isle Man) and Divis (Northern Ireland).

Transmission from Moving Sources

The basic problem in the case of moving sources is that of keeping the transmitting and receiving aerials in line with one another. In extreme cases the use of omni-directional aerials can provide the answer, but usually there is insufficient power to permit this, or to permit it at both ends of a link, and so it becomes necessary to arrange that, by one means or another, the two aerials are continuously adjusted to the correct bearing. Even when automatic devices are incorporated such adjustments are seldom precise enough to fall within the few degrees tolerance of an s.h.f. link: one therefore welcomes the wider beamwidth—25°—of the 659Mc/s u.h.f. link for cases of this kind.

Other problems may be associated with moving sources, depending on their nature. Submarines, aeroplanes and helicopters present special difficulties. The 'Roving Eye' (in essence a large car carrying a camera, microphone and transmitters) may want to transmit pictures while driving round built-up areas and so brings one up against non-optical or quasi-optical paths; there is no complete answer to this, but the use of v.h.f. (200Mc/s approximately) rather than u.h.f. does give a noticeable measure of diffraction round minor obstacles that would otherwise form complete obstructions.

Future Developments

The BBC now has a considerable investment in portable radio links and has equipped itself with a wide range of vision and sound apparatus to cater for most of the foreseeable needs of television during, say, the next five years. What the more distant future holds in store is, of course, uncertain, but it is likely that frequency allocations will come under review from time to time in relation to the needs of other users. The general trend is always towards higher frequencies, and this may bring certain new problems, though it is hoped gradually enough to permit the necessary progressive adjustment of technique.

Whether tropospheric-scatter propagation and associated equipment will develop sufficiently to enter the field of portable or temporary television links seems very dubious at the present time. The potentialities, however, are most attractive if thereby one could span, say, 300 miles in one 'hop'. It is possible to map a route between the United Kingdom and North America—via Faroes, Iceland and Greenland—over which none of the sea paths need exceed 300 miles. Thus the range of television coverage might be enormously enlarged and the opposite shores of the Atlantic come within television 'range'.

Acknowledgment

The author thanks the Chief Engineer of the British Broadcasting Corporation for permission to publish this article and also acknowledges considerable help received from colleagues in various departments.

REFERENCE

1. A U.H.F. Television Link for Outside Broadcasts. *B.B.C. Engineering Monograph No. 19* (To be published) (1958).

Broadband Microwave Systems Employing U.H.F. Triodes

By G. W. S. Griffith*, A.M.I.E.E. and B. Wilson*, M.B.E.

The arguments developed in this article indicate that it is more economical and more convenient to arrange for the modulation, demodulation, and as much of the amplification as possible in a microwave system to be carried out at an intermediate frequency.

Further, in the 1 700 to 2 300Mc/s band, microwave triodes are the most satisfactory means of providing amplification, and have been used in conjunction with coaxial transmission lines to produce a very compact and simple equipment using low voltages.

The system described is based on these techniques, and satisfies the performance recommendations of C.C.I.R. for the long haul transmission of 240 telephony channels, or television signals, with an adequate margin for contingencies.

ALTHOUGH investigations into the use of microwave systems for communication services were started in the late 1930's, it was not until after the war that they were extensively used for public services. Many companies on both sides of the Atlantic were developing this type of equipment with the result that different techniques and operating frequencies were employed.

In 1947 an experimental link was set up between New York and Boston operating at 4 000Mc/s. Early American experiments made use of velocity modulated valves, but these were later abandoned in favour of specially designed triodes[1].

The first microwave system in the United Kingdom went into service in December, 1949 to carry 405 line television signals at 900Mc/s between London and Birmingham[2]. This used a range of triodes developed during the war.

A further system for operation at 4 000Mc/s was developed using travelling-wave tubes, the first of these being installed in March, 1952 to carry television signals between Manchester and Edinburgh[3]. Since then many systems have been installed using the various methods of operation, and it is of interest to note that in 1954 when several of the European countries combined in 'Eurovision' for the exchange of television programmes, triode systems on 2 000Mc/s were used in Switzerland, Germany and the South of England, while travelling wave tubes on 4 000Mc/s were used in France and the North of England. Directly modulated klystrons on 4 000Mc/s and 6 000Mc/s were used on some of the interconnecting links.

Types of System

Basically there are two types of broad band microwave system in current use. In the first, all the amplification necessary is carried out in the u.h.f. (or s.h.f.) band. A suitable amplifier for an all radio frequency repeater has been described elsewhere[4]; it employs disk-seal triodes capable of providing a stage gain of 8 to 10dB. It should be mentioned that amplification is also possible by means of travelling-wave tubes, the higher stage gain available enabling a smaller number of valves to provide the necessary overall gain. This is offset by the high voltages required and by having to provide the magnetic field systems necessary for focusing.

However, in spite of the apparent simplicity of this arrangement, most of the microwave equipments so far installed have employed the alternative system in which a large part of the necessary amplification is effected at an intermediate frequency. There are a number of reasons for adopting this procedure:

(1) Gains exceeding 10dB per stage can be readily achieved in amplifiers having bandwidths greater than 30Mc/s to the 3dB points by using modern high figure of merit valves.

(2) The linearity of the phase/frequency characteristic (group delay) can be accurately controlled and can have good symmetry. With the low centre frequency/bandwidth ratio, which is inherent in i.f. systems, temperature, humidity, and ageing effects are minimized, and accurate equalization of i.f. group delay characteristics can be maintained for long periods.

(3) Suitable valves, and their associated circuit elements for use in i.f. amplifiers are comparatively cheap. For example, in an i.f. amplifier providing 80dB gain, the cost of valves required for the necessary six or eight stages would probably be less than that of each of eight u.h.f. triodes, and very much less than each of three travelling-wave tubes that would be necessary to provide the same gain.

(4) Automatic gain control and limiting are comparatively easy to apply to compensate for the large changes in signal level that are involved even with line of sight paths.

In both types of system just described it is necessary to provide a shift of frequency to change the frequency band accepted by the receiver to a different band for re-transmission to prevent direct feedback.

In addition to the amplification question discussed above, it is necessary to consider whether the signal should be modulated and demodulated at the ultra-high or intermediate frequencies. Direct modulation of klystron oscillators has been used, but suffers from the disadvantage that the modulator linearity is dependent on klystron tuning.

Demodulators are usually operated at intermediate frequency because of the difficulty of providing effective limiting of u.h.f. signals over the whole base-band or video range. A further advantage of using an i.f. demodulator is the improvement in the stability of the discriminator characteristic due to the low centre frequency/bandwidth ratio. In a practical system it is advantageous to operate both the modulator and demodulator at the intermediate frequency chosen for the system. As an example, we would mention a recent paper[5] describing a type of modulator (using grounded grid triode valves), which can be frequency modulated over a wide frequency range with good linearity. A number of

* *The General Electric Co. Ltd.*

variants of this general type are possible and have given good results.

System Parameters

Before considering a typical system in detail, it is useful to consider some of the special test methods used to evaluate the performance of a broad-band frequency-modulated radio transmission system. The important parameters are:

(a) A level amplitude/frequency response over the required range with a gradual fall outside this range (in the interests of transient response).

(b) Very good linearity of the input/output signal relationship at all base-band or video frequencies in the required range.

These parameters are influenced by the following factors:—

(1) Modulator linearity—i.e. the maintenance of a linear relationship between the instantaneous amplitude of the incoming signal, and the instantaneous frequency of the modulated output signal.

(2) Amplitude frequency characteristic—This should be level for all parts of the system handling a frequency modulated signal.

(3) Linearity of the phase/frequency characteristic of all parts of the system handling a frequency modulated signal, including the modulator and demodulator.

(4) Echoes—such as may be produced by mismatches in long feeders must be reduced to suitably small proportions.

(5) Reduction of the level of interfering signals to some 65 to 75dB below the wanted signal (these interfering signals may arise from harmonics of shift frequencies in a single channel, or from other channels where more than one r.f. channel is used).

(6) Linearity of the instantaneous frequency/instantaneous amplitude characteristic of the demodulator.

(7) The overall amplitude/frequency response must be level and input amplitude/output amplitude characteristics must be linear in any amplifiers or other devices used in the base-band or video section of the equipment.

(8) The time delay/base-band (or video frequency) characteristic of the equipment must be substantially constant over the frequency band.

Special test equipment has been designed for the development and maintenance of u.h.f. systems. The adoption of an i.f. system simplifies some of this test equipment since all modulators, demodulators, limiters, and i.f. amplifiers operate on the same frequency. Group delay measurements can also be made from an i.f. point of a transmitter to an i.f. point on a following receiver, so that the group delay of the r.f. part of the equipment can be evaluated.

Triode Microwave Amplifiers

So far three methods of providing microwave amplification have been mentioned—klystron, triode, and travelling wave tube. The over-riding advantage of the triode over the klystron is that it is possible to make triode amplifiers that are capable of maintaining the required amplitude and phase characteristic over wide frequency bands. Although the travelling-wave tube is available and capable of dealing with much wider frequency bands, there are disadvantages associated with too great a bandwidth.

The frequency spacing recommended by the C.C.I.R. indicates the desirability of limiting the bandwidth. Adequate

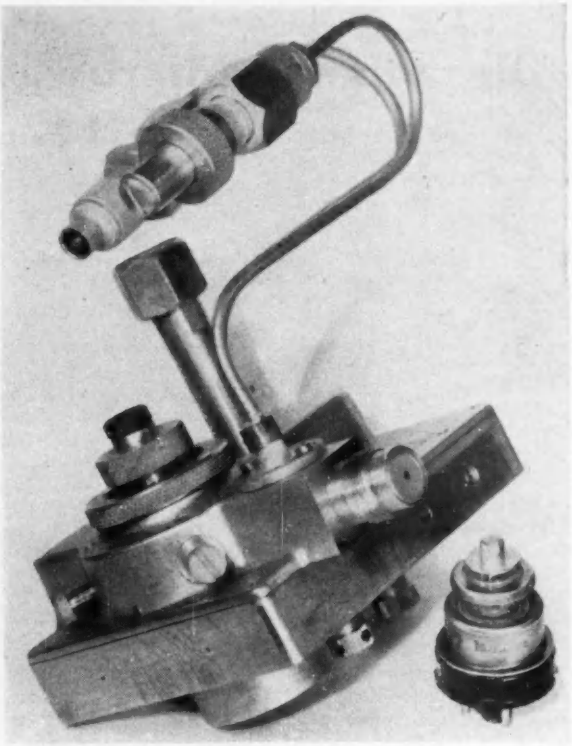

Fig. 1. U.H.F. circuit

Fig. 2. Transmitter-receiver rack without and with front covers

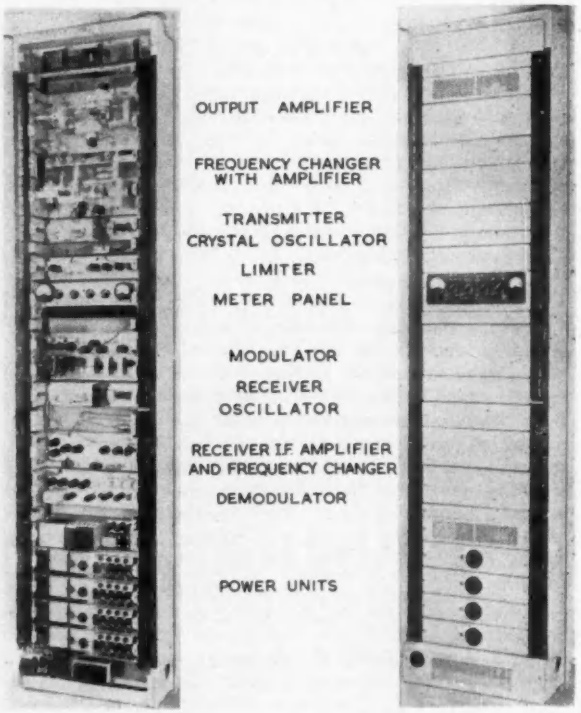

bandwidth restriction is provided by a triode amplifier. Also, in i.f. systems and in shift frequency mixers at repeaters, the r.f. carrier is modulated by a comparatively low frequency (70Mc/s to 250Mc/s), and the appropriate sideband is selected for transmission. The filtering necessary to attenuate the carrier frequency and unwanted modulation products is simpler if triode amplifiers are used because of the inherent selectivity of this amplifier circuit.

A further advantage is that using modern triodes an h.t. supply of 200V with no very stringent requirements on stability or ripple is adequate. This means the power supply units can be cheap and simple without sacrificing reliability. Heater requirements are also easy to meet, but longest life will be obtained if the heaters are operated within 2 per cent of the nominal operating voltage.

The triode has a special advantage in a transmitter mixer stage. This stage provides either the frequency shift at an all r.f. repeater or the translation from i.f. to u.h.f. (or s.h.f.) where i.f. circuits are used. The mixers can use either silicon crystals, triodes, or travelling wave tubes. The silicon crystal with a high level drive suffers from the disadvantage of harmonic generation, and these harmonics of the intermediate frequency can appear at the u.h.f. output terminals at objectionable levels. Triodes and travelling-wave tubes are appreciably better in this respect, the triodes having the advantage that the i.f. power required for efficient operation is considerably less than for travelling-wave tubes.

Typical Triode System

The following microwave system was designed by G.E.C. to transmit at least 240 speech channels, or television signals, in accordance with the recommendations of C.C.I.R. It operates in the frequency band 1 700 to 2 300Mc/s over line-of-site paths.

The linearity of both amplitude and phase characteristics is adequate for good quality transmission of either multi-channel telephony or compatible colour television signals. The bandwidth required for the television signals is of course greater than for the 240 telephone channels.

Because of the advantages enumerated in the first part of this article, most of the amplification is carried out at an intermediate frequency of 70Mc/s. The modulators and demodulators also operate at this

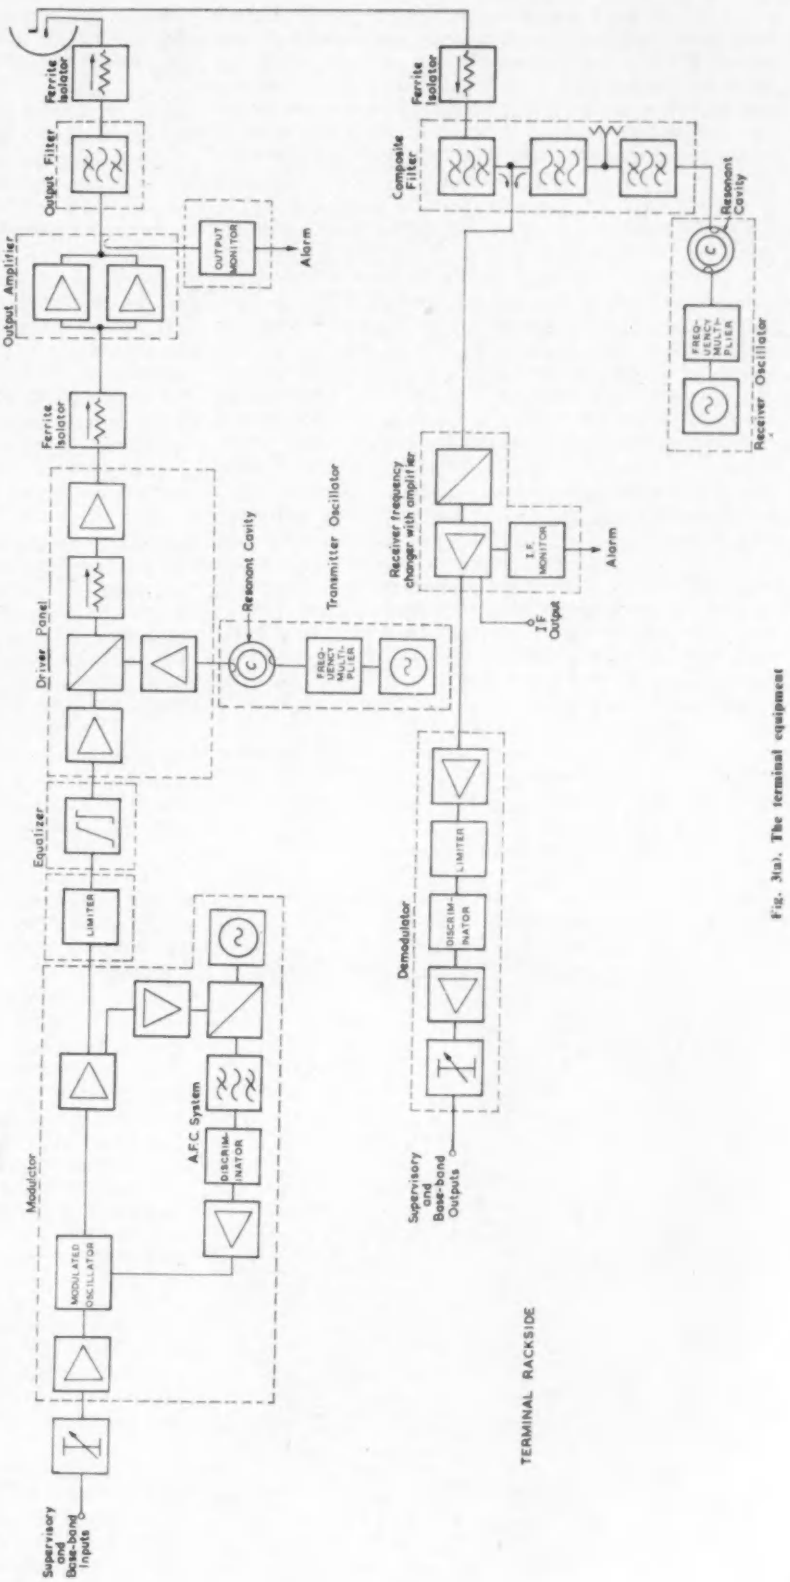

Fig. 3(a). The terminal equipment

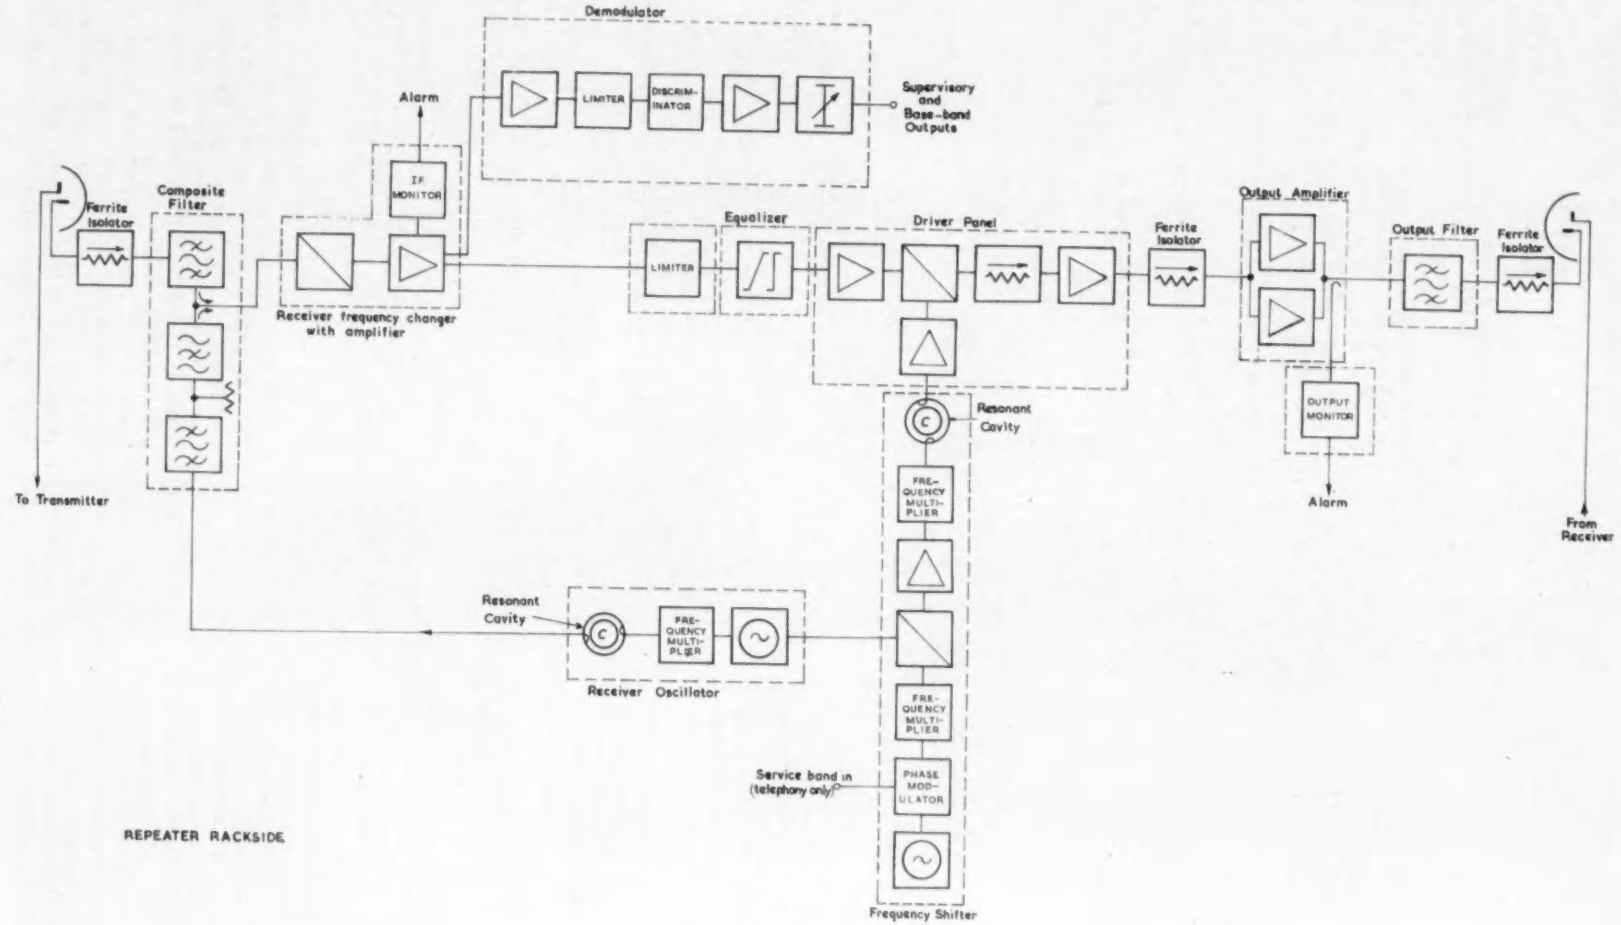

Fig. 3(b). The repeater equipment

frequency. Triodes are used in the transmitter frequency changer and u.h.f. amplifiers. The valves are operated at conservative ratings and have proved to be very reliable and give satisfactory service.

A thin waveguide input circuit is used so that the valve, which is situated rather less than $\lambda/4$ from the short-circuited end of the guide because of the valve input capacitance, effectively terminates the line. The signal is coupled into the waveguide from a coaxial input connexion. Tuning screws are provided to arrange for the waveguide to present a good termination to the coaxial input.

The grid-anode circuit consists of a coaxial cavity, which is capacitively loaded by the grid-anode capacitance of the valve, and which operates in the $\lambda/4$ mode of resonance. The cavity is approximately tuned to frequency by a preselected loading block; final tuning to cover valve replacement variations is performed by a capacitance tuning screw.

The output transmission line is capacitively coupled to the cavity. The anode cavity is designed so that the inner of the circuit makes sufficiently good contact to the valve anode, and is short enough to provide adequate thermal conduction to the outside of the circuit.

The u.h.f. circuits shown in Fig. 1 are manufactured from special aluminium forgings, which provide the internal contours of the cathode circuit as well as the external circuit shape without any further machining. The circuits have been tested with the ambient temperature varied over a range of 58°C. The change in anode circuit resonance over this temperature range was only 0·025 per cent (500kc/s). This variation can be accepted by the equipment without any measurable degradation of the system performance.

Fig. 2 illustrates a rack on which these circuits are mounted. The rack, which is 7ft 6in high, 20in wide and only 8in deep, houses a transmitter and a receiver, their associated power equipment, functional monitoring and built-in metering facilities.

This rack can be used either as a terminal transmitter and receiver providing for simultaneous transmission of signals in both directions or as a repeater. In the latter case two such racks are required to provide a repeater station for simultaneous transmission of signals in both directions.

Figs. 3 (a and b) show in diagrammatic form the arrangement of the terminal and repeater equipment.

At a terminal transmitter the incoming base-band signal is routed to the modulator where it frequency modulates a 70Mc/s sub-carrier. An automatic-frequency control system stabilizes the mean frequency of the modulator. The 70Mc/s signal is then passed through a limiter, which reduces any residual amplitude modulation to negligible proportions, an i.f. phase equalizer and a single stage amplifier, to the transmitter frequency changer. The u.h.f. drive to the frequency changer is produced by a crystal controlled oscillator and multiplying chain employing only three small receiving type valves. This gives an output of a few milliwatts at the required frequency which is selected by a tuneable cavity. As the output from the oscillator panel is too low for high level mixing, a stage of u.h.f. amplification is provided before the frequency changing stage. Local oscillator and i.f. signals are applied simultaneously to the cathode of the mixer which is a triode valve operating on the non-linear part of its characteristic.

The design of the frequency changer u.h.f. circuit is mechanically identical with that of the u.h.f. amplifiers, the anode circuit being tuned to the required sideband. The amplifier following the mixer stage is preceded by a ferrite isolator to reduce interaction between the circuits. A filter network in the anode circuit of this amplifier attenuates the residual carrier and unwanted sideband from the mixer to a low level before being passed via a second ferrite isolator to the output amplifier, which consists of two valves in parallel combined in such a way that they can be tuned independently. Directional couplers are incorporated in the output of each stage so that a simple scanned oscillator and display unit (shown in Fig. 4) can be connected to the transmitter and the response at each u.h.f. stage displayed.

The directional coupler following the output stage is connected to a moving-coil relay which continuously indicates the output power, and provides an alarm signal if the transmitter output power falls below a pre-determined level.

Ferrite isolators are used at the equipment end of the aerial feeders to provide an adequate termination for echoes which may be reflected from the antenna or from feeder irregularities. Semi air-spaced feeders of the helical membrane type are used, since at these frequencies the loss is reasonable, and reflections due to irregularities are at an acceptable level. These feeders have the advantages of lower cost and easier handling than waveguide runs.

The antenna comprises a paraboloidal reflector fed by a waveguide type of launching unit and provides a gain of approximately 34dB at 2 000Mc/s. The launching unit is of the dual polarization type, i.e. both horizontally and vertically polarized waves can be launched or received simultaneously. Multiplexing arrangements can be provided to enable up to three transmitters or receivers to be operated on each polarization of the antenna: i.e. three transmitters and three receivers can be operated on a single antenna.

On the receiver side of the equipment the incoming signal is fed via a branching filter to the receiver mixer. The branching filter is of coaxial construction. The input signal line includes a band-pass filter at signal frequency, while the local oscillator line includes a band-stop filter at signal

Fig. 4. Scanned i.f. oscillator and display unit

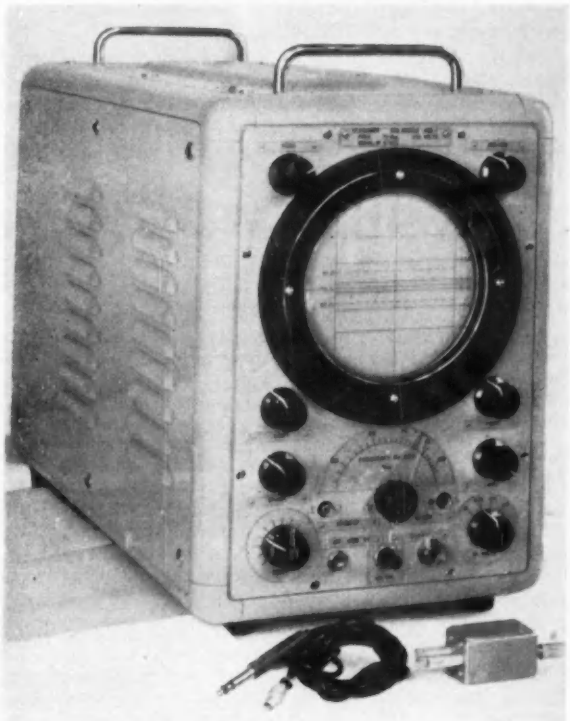

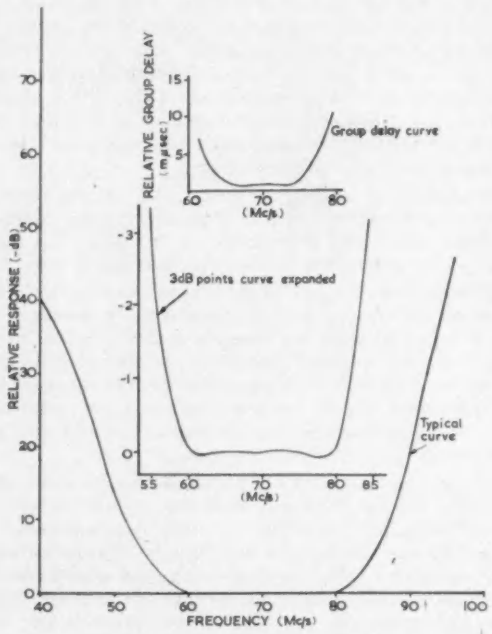

Fig. 5. Amplitude and group delay response of i.f. amplifiers

frequency, a band-pass filter at the local oscillator frequency and a load for the absorption of image power generated in the crystal mixer. The arrangement is shown in Fig. 3. It will be seen that both signal and local oscillator power are fed to the same terminal of the mixer unit, which comprises a coaxial type silicon crystal unit and a matching transformer.

The receiver local oscillator is identical with the transmitter oscillator. The output level of 2 to 3mW is adequate for this purpose, and amplification is not necessary.

The output of the crystal is fed to a low noise i.f. input stage. The overall receiver noise factor is 10dB. Following this low noise input stage are five broad-band amplifying stages. A phase equalizer is fitted in the i.f. chain to compensate for the phase characteristics of the coupling transformers used. The overall characteristics of the i.f. amplifier are shown in Fig. 5.

The output of the i.f. amplifier is fed to the demodulator, while in a repeater station a second i.f. output is fed via a limiter to the transmitter mixer.

The demodulator consists of an amplitude limiter, discriminator, and base-band amplifier. Back-to-back silicon diodes are used in the limiter section, which attenuates any amplitude modulation on the incoming signal by 40 to 50dB before passing it to the discriminator. The discriminator makes use of the amplitude frequency response lying between the series and parallel resonance of a three element network. Values are chosen to provide good linearity and the balanced detector arrangement used has good amplitude rejecting properties at centre frequency. The base-band amplifier is of conventional design.

The reliability of the u.h.f. triodes has proved to be good. Lives varying between 4 000 and 10 000 hours are usual, and in a typical system the fault rate from all causes including normal valve replacement has averaged one per 1 200 hours per transmitter-receiver rack. In only one out of eleven faults was the service interrupted so that even when a system is run without standby the fault liability is low.

The power consumption of one transmitter-receiver rack is less than 0·5kVA.

Acknowledgments

The authors wish to express their thanks to the management of The General Electric Co. Ltd., Telephone Works, Coventry, for permission to publish this article.

REFERENCES

1. Roetken, A. A., Smith, K. D., Friis, R. W. The TD2 Microwave Relay System. *Bell Syst. Tech. J. 30*, Pt. 2, 1046 (1951).
2. Clayton, R. J., Espley, D. C., Griffith, G. W. S., Pinkham, J. M. C. The London-Birmingham Radio Relay Link. *Proc. Instn. Elect. Engrs. 98*, Pt. 1, 204 (1951).
3. Dawson, G., Hall, L. L., Hodgson, K. G., Meers, R. A., Merriman, J. H. H. The Manchester-Kirk o'Shotts Television Radio-Relay System. *Proc. Instn. Elect Engrs. 101*, Pt. 1. 93 (1954).
4. Bowen, A. E., Mumford, W. W. A New Microwave Triode: Its Performance as a Modulator and as an Amplifier. *Bell Syst. Tech. J. 29*, 531 (1950).
5. Ravenscroft, I. A., White, R. W. A Frequency Modulator for Broad Band Radio Relay Systems. *P.O. Elect. Engrs. J. 48*, Pt. 2, 108 (1955).

Travelling-Wave Tubes in Communications

By R. B. Coulson*, B.Sc., B.E.

Microwave repeaters for telephone communication are the first equipments to use travelling-wave tubes in appreciable quantities. The application of t.w.t's for this purpose is discussed.

For commercial equipments, the author expresses the opinion that electromagnets wound with aluminium foil are at present preferable to permanent magnets.

AFTER more than a decade of intensive development, the basic design of helix type travelling-wave tubes is now well established. Tubes now available from many different makers vary only in minor details such as operating voltages and outline. Radar and communication systems incorporating travelling-wave tubes are coming into operation, and equipment engineers can choose, with confidence, a tube to suit their particular requirements from the catalogues.

The tubes most commonly in use may be classified as power, intermediate or low noise tubes, and cover the frequency range 1 000 to 10 000Mc/s with gains up to 40dB.

This article discusses some applications of travelling-wave tubes, their advantages and the problems of installation.

* *English Electric Valve Co. Ltd.*

Communication Equipment

The spread of telephonic communication throughout the world has led to the demand for radio links capable of carrying an ever-increasing number of telephone channels. This in turn calls for greater r.f. bandwidths and the extension of carrier frequencies into the microwave region.

The inherent broad bandwidth and high gain travelling-

wave tubes make them very suitable in link repeaters especially if all the amplification is performed at r.f. by simply cascading three or four tubes. Small capacity systems can utilize ordinary i.f. amplifiers with appropriate frequency changing before and after the i.f. amplification, but usually a t.w.t. is most conveniently used in the output stage giving upwards of 4W. For microwave links with more than six repeater stations carrying 600 or more telephone channels to C.C.I.R. standards, an all travelling-wave tube system is highly competitive[3].

The tube line-up in a typical repeater is a low noise tube, two intermediate tubes and a power output tube. One of the intermediate tubes is used as a frequency changer, say, for example, from 2 000 to 2 100Mc/s, by modulating the helix voltage at the difference frequency, 100Mc/s. The new frequency is selected by means of a bandpass filter, the unwanted frequencies being reflected back into the t.w.t. where they are absorbed. This mode of operation is accompanied by a loss in gain[2] of about 10dB.

There are special problems in the impedance matching of t.w.t.'s for high capacity telephone systems. It has been shown[3] that whether or not t.w.t.'s are used, the v.s.w.r. in some parts of the system, notably the output of the output stage, must be of the order of 1·1 over a bandwidth of 10 or 20Mc/s. Whereas there is little difficulty in adjusting the match of a t.w.t. to this figure when no voltages are applied, the v.s.w.r. often rises when the valve is switched on. This is because a signal reflected back into the output of a t.w.t. travels down the helix and is absorbed except in so far as there are small reflections occurring either at the attenuator or at small irregularities in the helix itself. These reflections, moving now in the same direction as the electrons, are amplified in the usual way by about 20dB. Thus, even though the reflected voltage wave is only 0·2 per cent of the original, a v.s.w.r. of 1·2 appears at the output. In practice the effect is less than this when the t.w.t. is delivering power to the aerial, particularly when the tube is working at saturation, and it is possible to correct for this mismatch over an adequate bandwidth by normal adjustments at the output.

Because the amplification process is involved, the magnitude of the reflected wave will vary as the helix voltage is varied, being a maximum when this is adjusted for small signal operation. This phenomenon can be utilized as a further matching adjustment at the expense of some loss in gain. The helix voltage must therefore be carefully stabilized to reduce variations to less than 1 per cent if small v.s.w.r.'s are required.

This problem is almost completely removed if a ferrite isolator with 20dB or more in the reverse direction is used. The v.s.w.r. at the valve can then rise to 1·5 without affecting system performance. The cost of an isolator is offset by the omission of precise matching controls, and test equipment to measure the v.s.w.r.

Travelling Wave Amplifier Units

Although the t.w.t. has been much publicized for its very wide bandwidth, the applications where full use is made of this property are very few. Fig. 1 shows a packaged t.w.t. complete with power supplies suitable for laboratory or field use where a wide-band instrument is required. The particular unit shown is a low noise amplifier with a noise factor less than 8dB over the band 1 200 to 1 400Mc/s and is suitable for experiments on aerial performance. If the t.w.t. was replaced by an intermediate tube, the same unit could be used to amplify a signal generator for laboratory uses. As the frequency is changed, no adjustments whatever need be made to the t.w.t. The gain may be varied if required by means of the first anode voltage control which in turn varies the beam current.

The box shown in Fig. 1 can be mounted directly in a repeater or radar equipment. This method of installing a tube is to be recommended in situations where only unskilled personnel are available or when specialized test equipment is not kept on the site. Critical adjustments, such as precise impedance matching or setting up for optimum noise factor, can then be made beforehand at

Fig. 1. A travelling-wave tube amplifier complete with power supplies and lightweight electromagnet

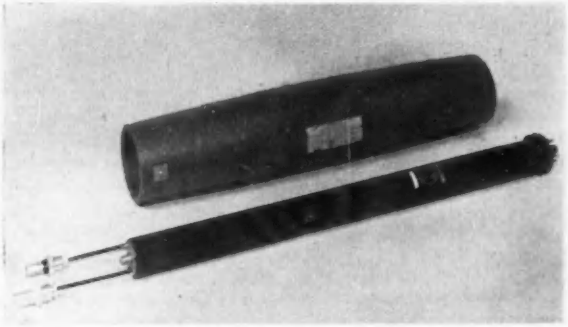

Fig. 2. A uniform permanent magnet shown with the travelling-wave tube for which it is intended

The mechanical arrangements for mounting are not shown

a service depot. In this unit the only hot-cathode tube is the t.w.t. itself. Copper oxide and germanium devices are used as rectifiers in the power supplies for the t.w.t. and solenoid, while the voltage is stabilized by neon stabilizers.

Magnetic Field for T.W.T.'s

As with most devices depending for their operation on a long beam of electrons, the t.w.t. must be placed in a strong magnetic field parallel with its axis. Until fairly recently this has been obtained by an electromagnet wound with insulated copper wire carrying about 2A at 40V. Such electromagnets are very heavy and costly, and it is probable that had this not been so, many more travelling-wave tubes would be in use today than there are. Great efforts have therefore been made to overcome this problem and though modern t.w.t.'s still need focusing fields, the means for obtaining them have been improved.

By far the simplest replacement for the copper electromagnet is a straightforward permanent magnet (Fig. 2). Such magnets overcome the objections of cost, weight and the need for a power supply, and can now be obtained from tube manufacturers for an increasing number of

their products. In some applications steps must be taken to screen neighbouring equipment from the stray magnetic field. This tends to make the space taken up by the t.w.t. rather large. The same problem exists with electromagnets to a lesser degree but, in this case, the screens may be brought up close to the electromagnet without seriously weakening the field strength along the axis. This is not possible with permanent magnets.

Another means for focusing the electron beam is the periodic permanent magnet[4] comprising a series of small

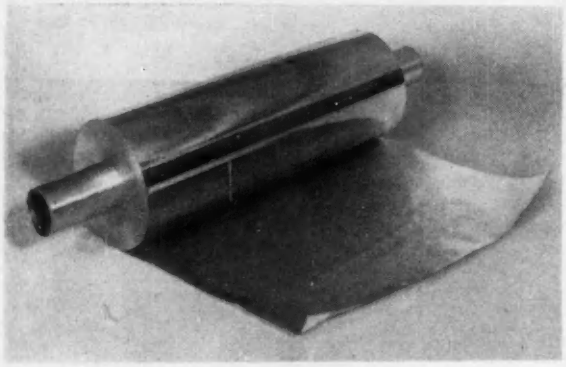

Fig. 3. Aluminium foil for electromagnet

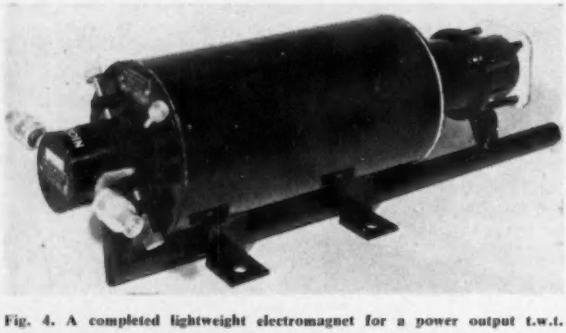

Fig. 4. A completed lightweight electromagnet for a power output t.w.t.
Some of the air needed for cooling the collector is diverted through the centre of the winding allowing a considerable reduction in size and weight. The magnetic field is 375 oersteds

permanent magnets alternating in polarity, so that a plot of the field along the axis is approximately a sine wave. This magnet assembly overcomes all the objections of both copper electromagnets and uniform permanent magnets except that of cost, and this will be almost certainly overcome in time as a result of collaboration between tube designers and the manufacturers of the magnet 'cells'. Until then, there is little likelihood that periodic magnets can be considered seriously for commercial equipments.

Some work is being done on electrostatic focusing[5] for t.w.t.'s but this is still in the development stage, and in any case is not applicable to present-day tubes.

The aluminium foil electromagnet shown in Fig. 3 is a practical solution to the problem of focusing in commercial equipment. The foil is wound tightly on an aluminium tube which forms the connexion to the inner turn of the winding, and is coated on one side only with a resin varnish. The volume is about the same as and the weight less than one-third that of a copper wire coil. The minimum field required to focus any particular t.w.t. is up to 25 per cent less with the foil coil. The heat conductivity is also slightly better, although this is offset to some extent by the higher electrical resistivity of aluminium.

The volume of any electromagnet is determined solely by the safe temperature rise so that, if the coil can be cooled by forced air, the size can be reduced appreciably. Electromagnets obtainable from tube manufacturers are usually designed for running with natural cooling and tend to be conservatively rated. It would be advisable for an equipment designer to consider the magnetic field requirements at an early stage in drawing his layout. Very often an equipment uses forced air for other purposes and, if some can be diverted for cooling the electromagnet, a much smaller design can be made.

Fig. 4 shows an aluminium electromagnet for use with a 4 000Mc/s power t.w.t. It weighs 15½lb and is rated at 14V 8A. In this case, where the collector of the t.w.t. must be cooled by forced air, arrangements have been made for passing a small stream of air down the centre of the coil.

Life Expectancy

The problems of life of oxide cathodes in t.w.t.'s are common to all tubes using long electron beams. One of the main causes of failure is the bombardment and destruction of the cathode surface by positive ions originating in the electron beam. Most of this can be eliminated by rigorous processing and pumping and by the use of convergent guns wherever possible. In power output tubes which have convergent guns, some destruction of the central portion of the cathode does occur, but the area affected is small compared with the total area. Lives well in excess of 10 000 hours are being recorded for such tubes.

Further reduction of ion bombardment can be achieved by means of the 'potential barrier' form of ion trap[6] in intermediate and power tubes.

In tubes so far developed it has not been found possible to combine a low noise factor with either a convergent gun or an ion trap. Nevertheless lives of 5 000 hours are being regularly obtained and it is expected 10 000 hours will eventually become commonplace.

Conclusion

Recently developed lightweight electromagnets and permanent magnets have overcome the obstacles to the adoption of travelling-wave tubes in commercial equipments.

A complete unit has been described in which the t.w.t., solenoid and all power supplies are incorporated into a portable box which can be used as a laboratory test equipment or installed directly into a major equipment such as a radar or radio repeater.

The advantages and some of the problems of the application of t.w.t.'s to radars and radio repeaters have been discussed.

Acknowledgments

The author desires to acknowledge with thanks the permission of the General Manager of the English Electric Valve Company Ltd for the publication of this article.

REFERENCES

1. FEDIDA, S. All-Travelling-Wave Tube System. *Electronic Engng. 30*, 283 (1958).
2. BRAY, W. J. The Travelling-Wave Valve as a Microwave Phase-Modulator and Frequency-Shifter. *Proc. Instn. Elect. Engrs. 99*, Pt. 3, 15 (1952).
3. FEDIDA, S. Some Design Considerations for Links Carrying Multichannel Telephony. *Marconi Rev. 18*, 132 (1955).
4. MENDEL, T. J., QUATE, C. F., YOCOM, W. H. Electron Beam Focusing with Periodic Permanent Magnet Fields. *Proc. Instn. Radio Engrs. 42*, 800 (1954).
5. CHANG, K. K. C. Confined Electron Flow in Periodic Electrostatic Fields of Very Short Periods. *Proc. Instn. Radio Engrs. 45*, 66 (1957).
6. LAICO, J. P., MCDOWELL, H. L., MOSTER, C. R. Medium Power Travelling-Wave Tube for 600-Mc Radio Relay. *Bell Syst. Tech. J. 35*, 1285 (1956).

TRAVELLING-WAVE TUBE AMPLIFIERS

By D. H. O. Allen*, B.A.

After a very brief résumé of the fundamental principles of travelling-wave interaction this article discusses the major advances made in the last few years towards improved and more useful travelling-wave tube amplifiers. A better insight into, for example, the noise behaviour of long beam amplifiers and periodic focusing methods has enabled the travelling-wave tube to become an essentially practical device suitable for incorporation in reliable communication equipment. The applications of the t.w.t., especially in microwave radio links, are also discussed together with comments on the distortions that are likely to be introduced under various operating conditions.

A FEW years ago the travelling-wave tube was described as the most publicized and least used of all microwave tubes in existence. Recently, however, circuit and system designers have come to realize that the t.w.t. amplifier can form a useful part of their equipments. One reason for its late entry into the field of practical equipment has, perhaps, been the natural timidity of system engineers to use a new and untried device, but in addition it is clear that until a few years ago valve manufacturers had not brought the t.w.t. to a sufficiently practical form. Why this is so is hard to determine, but one of the major practical disadvantages of the normal t.w.t. is the fact that an external magnetic field is necessary in order to focus the electron beam. Early focusing systems were very bulky and often consumed several hundreds of watts of d.c. power, but the advent of new ideas in the focusing of electron beams has in many cases enabled complete t.w.t. 'packages' to be made small in size and weighing only a few pounds.

Fundamental Aspects of the Travelling-Wave Tube

In principle the t.w.t. is a microwave amplifier depending for its operation on the interaction of an electron beam with an electromagnetic wave (representing the signal) travelling nearly at the same velocity. In practice it is extremely difficult to accelerate an electron beam to near the velocity of light, but the wave can be effectively slowed down by causing it to travel along, for example, a conductor coiled in the form of a helix. An observer on the axis of such a helix would see the electric and magnetic fields associated with the wave travelling past him with an axial velocity of $c\sin(p/2\pi a)$ where c is the velocity of light, and p and a are respectively the pitch and mean radius of the helix.

If the electron beam is projected down the helix at the same velocity as the apparent axial velocity of the wave individual electrons will either be retarded or accelerated according to the direction of the electric fields as they enter. Eventually the electrons travel in 'bunches' but no amplification occurs since an equal number are accelerated and retarded. If, however, the beam enters at a fractionally greater velocity than the wave, more electrons will be retarded and the net effect will be for the beam to give up energy to the wave. In this way the wave (or signal) is amplified.

Basically the t.w.t. amplifier needs merely an electron beam at the correct velocity and a suitable slow wave circuit. In practice, however, the provision of a suitable beam for a low noise or, perhaps, a high power tube may present special problems and these will be discussed below. Different types of slow wave circuits have different properties and some are more suitable for certain applications than others. However, the first t.w.t. made[1] used a helical conductor and the first serious attempts at providing a comprehensive theoretical understanding of the device was carried out by Pierce[2] using a helix type tube as a model. Since those early days several different types of slow wave structure have been considered and these are discussed below.

* *Mullard Research Laboratories*

Slow Wave Structures

The primary function of the slow wave structure in a t.w.t. is to enable the electric fields of an e.m. wave to couple continuously with a slow moving electron beam. The properties of a slow wave structure may be described in terms of the apparent velocity of propagation of the e.m. wave that is injected into it and the manner in which it couples to an electron beam. The broad bandwidth properties of a t.w.t. arise from the fact that the only criterion for useful beam-to-wave interaction is that their relative velocities should be correct. The intrinsic bandwidth is then only limited by the dispersion characteristics of the slow wave structure.

Pierce describes an impedance for a slow wave structure which determines how effectively its fields will interact with an electron stream and this is defined as $K = E_z^2/\beta^2 P$, where E_z is the useful electric field in the beam region, β is the propagation constant and P the power flowing in the structure. The gain of a t.w.t. amplifier is proportional to a parameter C given by $C = (KI_0/4V_0)^{1/3}$ where I_0 and V_0 are the current flowing in the electron beam and the effective voltage of the beam respectively.

Multi-channel communication systems require wide bandwidths and, for minimum distortion, it is clear that over this bandwidth there should be no variation of gain or time delays in any amplifier that may be used. It is therefore of paramount importance that a t.w.t. amplifier used for wide band communications should employ a slow wave structure that is non-dispersive (i.e. has a phase velocity that is independent of frequency), and that also has an effective coupling impedance that is constant over a wide frequency band.

The helical form of slow wave circuit used under the right conditions appears, at the present time, to be the ideal one for communications systems. It is true that several other forms of circuit, such as the disk loaded waveguide and several ladder-like structures have coupling impedances which can be orders greater than that of the helix, but in general these are very dispersive and may have only a few hundred kilocycles of useful bandwidth.

Another form of structure that is worthy of note, is the interdigital (i.d.) line[3]. In its usual form, consisting of a series of intermeshed conducting pins, it is used in backward wave oscillators when its backward fundamental slow wave interacts with the electron beam. However, the fundamental forward space harmonic has relatively little dispersion under its normal operating conditions, but shows only a small coupling impedance to an electron beam. Curves comparing the dispersion characteristics of the helix and i.d. line are shown in Fig. 1. At lower frequencies (for example 1 to 20kMc/s) there is no advantage in using such a structure because of its low coupling impedance, but where very high frequency operation (30 to 100kMc/s) is

considered this is an important advantage in that the i.d. line is easier to make, being somewhat larger than a comparable helical structure at the same frequency.

So far no mention has been made of high power applications. Without special cooling arrangements the helix is capable of operating in t.w.t. amplifiers giving at most a few hundred watts at low frequencies of 500 to 1 000Mc/s. At much higher frequencies where the slow wave structures become small, and resistive loses become greater much lower power levels only can be realized. It would seem, however, that by conventional means a few watts can be obtained at frequencies up to 11·5kMc/s which at present is the highest frequency band envisaged for normal microwave communications systems.

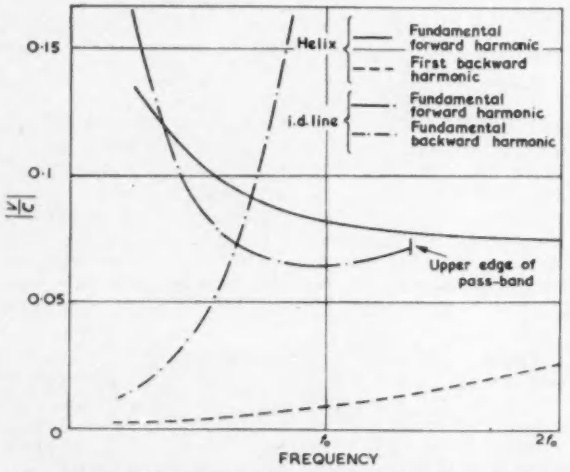

Fig. 1. Phase velocities/frequency calculated for a helix and interdigital line designed for optimum performance at frequency f_0

v/c is the ratio of the phase velocity to that of light

The Noise Problem

The range of a communication system is determined by the maximum output power available at the transmitter, the transmitter and receiver aerial gains, the path loss between transmitter and receiver and the noise factor of the receiver.

In the science and engineering of t.w.t. recent advances have provided a greater understanding of the factors contributing to noise output and noise factor, and the latest theories suggest that the minimum noise factor obtainable may be as low as 3·5dB.

Noise in t.w.t. amplifiers arises from several different causes, some of which are readily eliminated by careful engineering. Thus the familiar partition noise effect found in conventional pentodes and tetrodes is also present in t.w.t.s' if the slow wave circuit is allowed to collect some of the beam current near its input end. Proper alignment of the helix and gun and correct design of the focusing magnetic field can eliminate this without difficulty—at least at the lower microwave frequencies where the structures are reasonably large.

The fundamental source of noise lies in the cathode and is due to the inherent high temperature of the electron-emitting surface and the familiar shot effect which arises from the randomness in time of emission of individual electrons. The elevated temperature of the cathode gives rise to a velocity distribution of electrons which initiates a 'velocity' source of noise propagated on the plasma waves of the electron beam. The shot effect produces a 'current' source of noise also propagated in a similar way.

It would seem that a reasonably complete understanding of the physical mechanism of the methods by which these noise waves may be effectively reduced has been made in recent years by Watkins[4], Bloom and Peter[5], and other workers in the field. As a result a considerable amount of published data on the noise performance of practical tubes is available, at least for amplifiers at frequencies below 7·5kMc/s.

Work by these authors predicts a minimum attainable noise factor of about 6dB, but this figure is largely determined by the assumed 'noisiness' of the electron beam before it enters the noise reduction region of the electron gun. Recent work by several workers has been devoted to acquiring a better understanding of the mechanisms existing in the region between the emitting surface of the cathode and the potential minimum plane and two facts now seem to be clearly established. Firstly, there is no correlation between the velocity and current sources of noise and this has been borne out by experiment. Secondly, it is not a valid approximation in any analysis to consider the electron flow as single-velocity in nature. Theoretical work by Siegman *et al*[6] has confirmed that the multi-velocity nature of the flow in the potential minimum region must be considered. If this is done then noise figures of around 3dB are predicted.

Most of the experimental verification of noise figures of t.w.t. amplifiers has been done at the lower frequency end of the microwave spectrum, generally in the band 2·4 to 4kMc/s. From published results there seems to be no doubt that noise factors as low as 6dB can be obtained consistently in well designed tubes at 3 000Mc/s without very critical adjustments and that reasonably good life may be obtained from such tubes[7].

At higher frequencies there is doubt as to whether the noise theories developed for the cathode-potential minimum regions are still valid, but noise factors of as low as 8·5dB have been reported at X-band. One of the major difficulties at these higher frequencies is that of eliminating partition noise arising from the interception of some of the beam by the very small helix that is employed. Only a tightening of an already very strict mechanical tolerance in the tube engineering can overcome this. A further difficulty at high frequencies is caused by the necessity to go to higher emission densities from the cathode which may well shorten the tube's useful life. One possible solution to this lies in the use of some of the dispenser or impregnated[8] cathodes, but these have the disadvantage of operating at a higher temperature than the conventional oxide-coated type. They do, however, have the advantage of possessing a very smooth uniform emitting surface which may well offer advantage when very small but high density electron beams are required for low noise devices.

Focusing Systems

An electron beam will normally diverge under its own space charge forces, so in order that all the beam may be projected right through a slow wave structure (possibly up to one foot in length) some focusing system must be provided. The most straightforward way of achieving this is to use a magnetic field to confine or focus the beam over the length of the tube. The magnetic field may be provided in two ways, either by means of a solenoid energized from an external d.c. supply or by a permanent magnet system. Whether or not the latter solution is possible is determined largely by the actual field requirements; an electron beam of very high density may require a field that is most impracticable to provide with a permanent magnet system of reasonable size and weight. In this case a solenoid is the more suitable, though this will, of course, require an associated power supply. The size and weight of focusing

solenoids for t.w.t.'s have been materially reduced recently by the use of either thin paper or anodizing as the insulation for aluminium foil windings[9].

From the point of view of magnet economy the best method of focusing an electron beam is by the 'Brillouin flow' method[10]. Here, immediately after leaving the electrostatic focusing region of the electron gun the beam is set into rotation by a sudden transverse magnetic field which changes rapidly to a uniform axial field down the length of beam.

It may be shown in the case of an ideal beam that the sum of the centrifugal force, the outward space charge force and the inward magnetic force on an electron in the beam is zero if the axial magnetic field, B, is given by

$$B^2 = 0{\cdot}69 \times 10^{-6}(I/V^{\frac{1}{2}}r_0^2)$$

where I = beam current, V = beam voltage and r_0 = beam radius (all in m.k.s. units).

In practice, due to thermal velocity effects of emission and an inevitable departure from the ideal theoretical input transition from the gun into the axial field, such a condition cannot quite be realized in practice, but satisfactory focusing has been attained with values of about 1·5 times the ideal Brillouin value.

In cases where an electron gun specially designed for optimum focusing cannot be employed, such as in low noise tubes, it is necessary to resort to 'confined flow' or, in popular parlance, 'brute-force focusing'. Here the axial magnetic field is made to be several times the theoretical Brillouin value and extends over the cathode region, but the beam boundary shows undulations which decrease in magnitude as the field is increased. Linear flow occurs only for the limiting case of an infinite magnetic field. Low noise tubes generally employ very low perveance beams of low density and therefore the fields required are realizable ones even if they need to be as high as ten times the theoretical Brillouin value.

Perhaps the most spectacular improvements in the practicability of t.w.t. amplifiers have been with the advent of periodic magnetic focusing systems. The realization that the focusing action of a magnetic field on an electron beam was proportional to the square of the value of the field prompted an investigation into the use of magnetic fields that varied periodically down the length of the tube[11,12]. In fact such a system may be considered as a succession of converging magnetic lenses where, for stable flow, the convergence produced is equal to the divergence caused by the space charge forces. Such a system is somewhat more critical to set up, especially for high perveance beams, but it has several advantages. The fields may be produced by a stack of magnetized disks which are isolated from one another by steel pole pieces and therefore to increase the length of a particular system merely means adding more disks and pole pieces. In a uniform field permanent magnet system the increase in length of the uniform field region would mean an increase to the power of three in both size and weight. In addition, since each successive effective magnetic dipole is reversed in direction the resultant field some distance from the magnet system is very small and most of the field is confined to the axis, where it is required. As a result t.w.t. circuits employing periodic permanent magnet focusing can be as much as ten to fifteen times lighter in weight than the uniform field counterpart. Fig. 2 and Fig. 3 show practical examples of these.

Obviously there are very great advantages in not having a magnet at all and then recourse must be made to an electrostatic periodic system. The problems involved in this have been examined at length, but only recently has come news of a practical tube[13] giving 10dB gain and 100mW of power output at 3 000Mc/s. This particular tube uses concentric bifilar helices to provide the slow wave circuit and the necessary periodic static electric fields to focus the annular electron beam that is made to flow down the gap between the helices. Such a tube is, of course, inherently

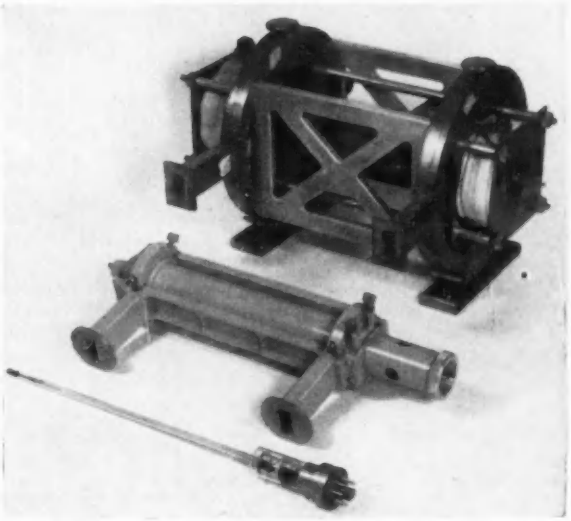

Fig. 2. Solenoid and periodic permanent magnet systems with coupling waveguides for X-band t.w.t. amplifier type VX8506

(gain >20dB from 7 to 11·5kMc/s), the weights are 39 and 4½lb respectively and the coil requires 24V, 4·5A

Fig. 3. Periodic permanent magnet and coupling system for the Mullard LA4-250 intermediate amplifier

This t.w.t. will give over 25dB of gain and 250mW of power in the band 3·6 to 4·2kMc/s

more complex than one focused by conventional means, but the user of such tubes may well be able to offset this against the comparative cheapness of the associated waveguide circuits which will then no longer require magnets or the rather complicated arrangements for moving them for accurate alignment.

Operation at Higher Power Levels

As has been stated earlier the most suitable slow wave structure for a t.w.t. amplifier for communications is the simple monofilar helix and this proves itself entirely adequate for power levels up to a few tens of watts of frequencies in the 4kMc/s band, somewhat less in the 6kMc/s band and a few watts only in the 11kMc/s band. In brief, the limiting factors against high power output are the increased losses and reduced size of the slow wave structure at high frequencies. The first implies the use of higher d.c. powers in the beam and the second the use of electron beams of very high electron density travelling close to the slow wave circuit which means that very large magnetic focusing fields will be required. It must be remembered that heat is dissipated in the slow wave circuit both by the passage of a large r.f. signal along it and by the inevitable collection of some of the d.c. electron beam power.

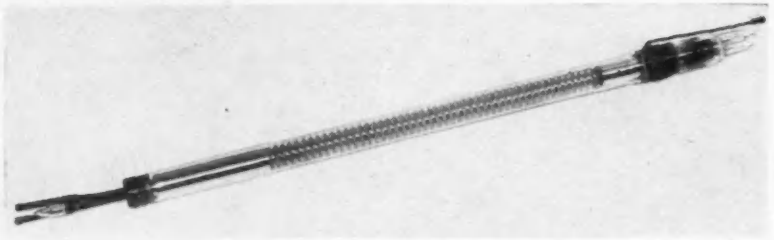

Fig. 4. An example of a higher power c.w., t.w.t. amplifier developed in the laboratories of N.V. Philips, Eindhoven
This tube will deliver 2·5kW of power with 16dB gain at 700Mc/s

Several other types of slow wave structures which can be machined from solid copper are undoubtedly capable of higher dissipations but may fail for reasons of bandwidth, group delay etc. However, these may well be suitable for tropospheric scatter systems where the bandwidths employed may not be very large and high powers are a requirement.

At the lower frequencies (below 1 000Mc/s) t.w.t. power amplifiers may well be used as final or penultimate stages in television transmitters and Fig. 4 shows a helix type amplifier which is capable of delivering 2·5kW c.w. at 700Mc/s. In this case size is not the main factor determining the maximum possible power output since the helix is wound from ¼in. copper pipe through which cooling water is pumped continuously. The electron beam size is nearly an inch in diameter and even though the current is several amperes the current density is low and thus focusing magnetic fields of only 500 gauss are sufficient.

Applications

One important requirement of a microwave communication system carrying a large number of telephone and telegraph channels is an amplifier of large bandwidth. Thus the t.w.t. is an obvious choice and has already seen several years of service in the Manchester-Kirk O'Shotts television link[14]. As an example of its use in a multi-channel telephony system there is shown in Fig. 5 a proposed all-microwave repeater at a carrier frequency of, for example, 4kMc/s.

From consideration of path loss between repeater stations, atmospheric fading, thermal noise and noise produced by intermodulation effects it would seem that an ideal repeater, up to C.C.I.R. standards, for a 600 channel link should have a power output of 5W, an input noise factor of 10dB and an overall gain[15] of about 85dB. In addition, a device for side-stepping the frequency by about 200Mc/s in order that there may be no instability arising from feedback between input and output aerials, must be included. Since the electrical length of a t.w.t. may be varied by several radians merely by altering the helix potential, a phase modulation may be imparted to the r.f. signal being amplified and if the necessary filters are included at the tube output to select the wanted sideband the combination may be used as a frequency shifter[16,17]. Two methods of doing this have been discussed using either sine or sawtooth modulation[18] voltages, but at the present time the sine form only is practicable at 200Mc/s

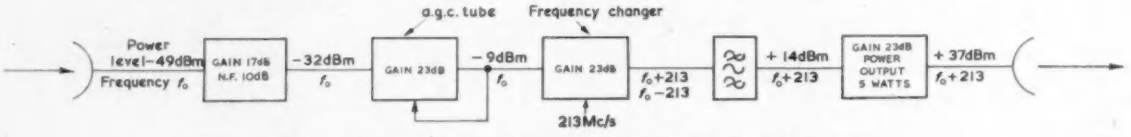

Fig. 5. A possible all t.w.t. microwave repeater containing four t.w.t. amplifiers

and this is normally used. In this case there is a theoretical loss of gain of 6dB, but this has been allowed for in the overall gain calculations for the repeater.

This typical repeater arrangement indicates the versatility of the t.w.t. amplifier as a circuit element—in one particular equipment it is used as a low noise amplifier, as an a.g.c. device to allow for fading, as a frequency shifter and as a power amplifier. In other forms of communication repeater that have been proposed and in some cases are in use, a typical repeater obtains most gain in an intermediate frequency amplifier at less than 100Mc/s using conventional valves and merely uses the t.w.t. as a modulator for applying the information to the microwave carrier, followed by a power-amplifier t.w.t.

A further type of communication system which is rapidly coming into use is that using tropospheric scatter[19]. Frequencies up to 5 000Mc/s have been considered for this technique and although the bandwidth requirements will be relatively small (certainly less than 10Mc/s) there would be an advantage in using a t.w.t. amplifier if it had a noise factor less than that of conventional crystal mixers. From various sources it would seem that the crystal mixer, adjusted for the lowest possible noise factor is not a very reliable device and there would, therefore, be advantages in using a low noise t.w.t. amplifier followed by a medium-noise mixer. On reliability grounds a low noise t.w.t. seems entirely satisfactory; there are published figures[20] of at least 5 000 hours without change of noise factor and, more recently 14 000 hours of life has been recorded without failure.

The power amplifiers considered for tropospheric scatter have been triodes at the lower frequencies and klystrons at the higher frequencies. Although the klystron's bandwidth is just about adequate for this form of communication and its gain is high (perhaps 50dB) the t.w.t. may be more advantageous where price is an important consideration. Generally speaking a glass envelope valve is cheaper to produce than an all-metal one and practical t.w.t.'s of all glass construction have been shown to be capable of providing at least 2·5kW power output at up to 1 000Mc/s. A further application of tubes of this type lies, of course, in the field of television transmitters for the higher frequency bands where gain competition with klystrons must be considered, although where powers of 10kW c.w. are required the all-metal klystron may be the only possibility in view of the cooling requirement.

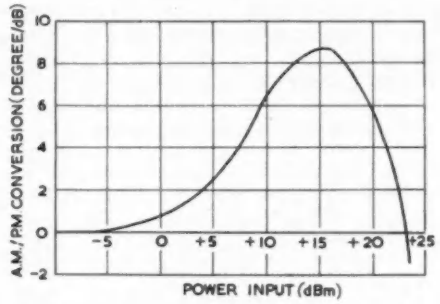

Fig. 6. Typical a.m./p.m. conversion for a t.w.t. amplifier
The phase shift in degrees per decibel change in input level has been plotted against input power

One important feature of any amplifier is the distortion which it may introduce into the signal being amplified. In a multi-channel communication system this will appear as noise which may considerably worsen the signal-to-noise ratio of the overall system. Forms of distortion which may contribute most to unwanted noise in systems are:

(1) Variation of gain across the required bandwidth.
(2) Differential phase distortion across the bandwidth.
(3) An amplitude to phase modulation.

Gain variations across the working bandwidth can be reduced by ensuring that an adequately non-dispersive slow wave structure is used and that the coupling system to the external circuits are adequately matched. Differential phase shifts arise from the dispersive nature of slow wave circuits but with the helix operated in its correct regime this form of distortion is very small and can normally be disregarded.

When a t.w.t. amplifier is being operated near saturation variations in input signal level will alter the velocity of the beam near the output of the tube since more or less energy is being extracted from the beam. As has been discussed earlier, variations of beam velocity cause variations of the phase of the output signal and thus an a.m. component on the input signal can give rise to an a.m. + p.m. component at the output. This will mean that any filters that precede such an amplifier must have an absolutely flat characteristic of transmission versus frequency. If this is not possible then the onus falls upon the tube designer to provide a t.w.t. with a very small a.m./p.m. conversion. Theory suggests that the phase shift at the output per decibel of input amplitude change is given by $9{\cdot}6\ P_{out}/P_{beam}\ C$ degrees (C in Pierce's gain parameter) as long as saturation is not approached too closely. Nearer saturation the situation worsens and the phase shift is greater than this small signal theory suggests. Published results on one 6kMc/s power amplifier t.w.t. closely follow the theoretical prediction[21]. It is interesting to note that when $P_{out}/P_{beam} = 1/15$ the shift is approximately 2·25°/dB, whereas it has been suggested that a 600 channel system and a colour television link might tolerate only 1°/dB. System requirements on this point appear not yet to have been fully evaluated. It may well mean, however, that all t.w.t. amplifiers in a high quality link may have to run at or below about one-quarter of their normal saturated power output. It will be noted that near saturation the phase shift curve turns over and at saturation the phase shift per decibel becomes zero. In principle this region could be used for low a.m./p.m. conversion, but the mean level in the system would have to be kept very constant against fading. (See Fig. 6).

Conclusions

Without doubt the t.w.t. amplifier is an extremely versatile microwave amplifier with few disadvantages. Its full potentialities are only just being exploited and system designers have only very recently come to regard it as a component engineered to a sufficiently high degree for incorporation into equipments.

The basic principles of the t.w.t. are now well known and understood, although certain work still needs to be done towards a better understanding of its behaviour under large signal conditions. The recent reports of a t.w.t. amplifier using an electrostatic focusing system and having a useful r.f. performance are extremely encouraging and may well mean that certain types of t.w.t. amplifier will become small in size and weight and require no bulky magnet system. The many advantages of the t.w.t. amplifier are now being evaluated by system designers and shortly it will no doubt become an integral part of many communication systems.

Acknowledgments

The author wishes to thank the Directors of Mullard Ltd. and the Director of Mullard Research Laboratories for permission to publish this article.

REFERENCES

1. Kompfner, R. The Travelling-Wave Tube Centimetre-Wave Amplifier. *Wireless Engr. 24*, 255 (1947).
2. Pierce, J. R. Travelling-Wave Tubes. *Bell Syst. Tech. J 29*, 390 (1950), and Pierce, J. R. Travelling-Wave Tubes (D. van Nostrand Co. 1950).
3. Walling, J. C. Interdigital and Other Slow-Wave Structures. *J. Electronic Control 3*, 239 (1957).
4. Watkins, D. A. Travelling-Wave Tube Noise Figure. *Proc. Inst. Radio Engrs. 40*, 65 (1952).
5. Bloom, S., Peter, R. W. Transmission-line Analog of a Modulated Electron Beam. *RCA Rev. 15*, 95 (1954).
6. Siegman, A. E., Watkins, D. A., Hsung-Cheng Hsieh. Density-Function Calculations of Noise Propagation on an Accelerated Multicavity Electron Beam. *J. Appl. Phys. 28*, 1138 (1957).
7. Kinaman, E. W., Magid, M. Very Low Noise Travelling-Wave Tube. *Le Vide*. No. 70, 308 (1957).
8. Levi, R. Improved "Impregnated Cathode". *J. Appl. Phys. 26*, 639 (1955).
9. Worcester, W. G., Weitzmann, A. L., Townley, R. J. Lightweight Aluminium Foil Solenoids for Travelling-Wave Tubes. *Trans. Inst. Radio Engrs.* ED-3, 70 1956).
10. Brillouin, L. A Theorem of Larmor and Its Importance for Electrons in Magnetic Fields. *Phys. Rev. 67*, 260 (1945).
11. Clogson, A. M., Heffner, H. Focusing of an Electron Beam by Periodic Fields. *J. Appl. Phys. 25*, 436 (1954).
12. Mendel, J. T., Quate, C. F., Yocom, W. H. Electron Beam Focusing with Periodic Permanent Magnet Fields. *Proc. Inst. Radio Engrs. 42*, 800 (1954).
13. Chang, K. K. N. Biperiodic Electrostatic Focusing for High Density Electron Beams. *Proc. Inst. Radio Engrs. 45*, 1522 (1957).
14. Dawson, G., Hall, L. L., Hodgson, K. G., Meers, R. A., Merriman, J. H. H. The Manchester-Kirk o'Shotts Television Radio-Relay System. *Proc. Instn. Elect. Engrs. 101*, Pt. 1, 93 (1954).
15. Fedida, S. Wide Band Microwave Radio Links. *Marconi Rev. 18*, 69 (1955).
16. Bray, W. J., The Travelling-Wave Valve as a Microwave Phase-Modulator and Frequency-Shifter. *Proc. Instn. Elect. Engrs. 99*, Pt. 3, 15 (1952).
17. Steele, G. F. The Modulation of Travelling-Wave Tubes. *Electronic Engng. 29*, 429 (1957).
18. Cumming, R. C. The Serrodyne Frequency Translater. *Proc. Instn. Elect. Engrs. 45*, 175 (1957).
19. Bullington, K. Characteristics of Beyond-the-Horizon Radio Transmission. *Proc. Instn. Radio Engrs. 43*, 1175 (1955).
20. Allen, D. H. O., Winwood, J. M. A Low Noise Travelling-Wave Tube Amplifier for the 4000 Mc/s Communication Band. *J. Brit. Instn. Radio Engrs. 17*, 75 (1957).
21. Laico, J. P., McDowell, H. L., Moster, C. R. Medium Power Travelling-Wave Tube for 6000-Mc Radio Relay. *Bell Syst. Tech. J. 35*, 1285 (1956).

Travelling-Wave Tubes For 4000Mc/s

By P. F. C. Burke*, B.A., Grad.I.E.E.

Travelling-wave tubes may be used in microwave radio links as output amplifiers, low-noise receivers or intermediate level amplifiers. The requirements for each of these applications and their influence on the design of the travelling-wave tubes are discussed. The application of these principles is illustrated by description of such tubes developed for 4 000Mc/s microwave links.

THERE has been a great development of wideband microwave radio links since 1950, particularly in the 3 600 to 4 200Mc/s band, and many of these have used travelling-wave tubes. A review of some such tubes developed for this frequency range will give an idea of their present capabilities and also the requirements that must be met for satisfactory operation in communication systems.

While all travelling-wave tubes employ the same basic principle for amplification, and can be used for this function at any stage in a microwave repeater, it will be convenient to consider separately the output amplifier, the low noise receiver and the intermediate level amplifier. Just as different circuit techniques would be used for these stages at lower frequencies, so there are considerable differences in the design of the corresponding travelling-wave tubes. Furthermore it may be desirable to use these tubes in only one or two of these three stages, depending on the requirements and economics of the complete system.

Output Tube

The fundamental requirements for the output tube in a microwave radio link have been extensively discussed before[1], with particular reference to the CV2188. The use of this tube in 1952 in the Manchester-Kirk O'Shotts television link was the first application of travelling-wave tubes in regular commercial service. Considerable experience since has confirmed the requirements foreseen then, with some modifications arising mainly from an increase in the number of telephone channels on each microwave carrier to 600 or more.

The principal factor determining the design of the output tube is the maximum power required. An output of about 5W is generally considered necessary for a 600 channel system, although this will depend on other system requirements such as aerial size, distance between stations and receiver noise factor. It is desirable for the travelling-wave tube to be capable of a rather greater maximum power output than this since the phase delay through the tube increases near saturation owing to the increased slowing-down of the electron beam as it delivers more power. This effect will convert any amplitude modulation on the input into phase modulation. The distortion produced by this effect will vary with the amount of amplitude limiting on the input of the tube. For a 5W operating level a maximum output of 7W to 10W is generally satisfactory and any considerably larger margin would greatly increase the size and expense of the travelling-wave tube and its power supplies.

The focusing of the electron beam is the major problem in obtaining the necessary power output, and has been fully discussed elsewhere[2]. To obtain 5W or 10W output from a travelling-wave tube at 4 000Mc/s the helix diameter will need to be considerably smaller than the cathode diameter if the cathode current density is about 200mA/cm^2, a figure which should give an adequate life from an oxide-coated cathode. This means a convergent electron gun must be used. It first appeared that the best way to obtain this in combination with magnetic focusing of the electron beam was to screen the cathode completely from the magnetic

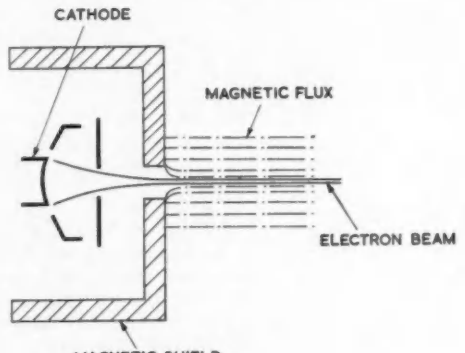

Fig. 1. Electron gun using 'Brillouin focusing'

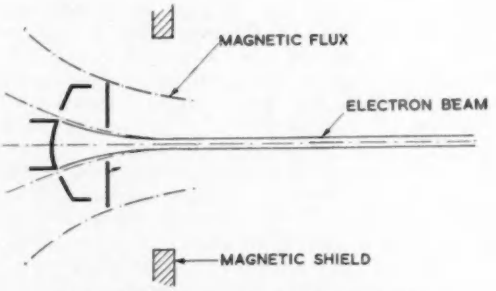

Fig. 2. Electron gun with shaped magnetic field

field, which rose suddenly to the required value near the point where the beam had its minimum diameter. A sketch of this 'Brillouin focusing' is shown in Fig. 1. Theoretically this requires the least field for focusing the beam but, in practice, operation at the theoretical field is rarely obtained and, of considerably more importance, the noise factor may be extremely high. The reasons for this behaviour are not fully understood but it has been found that more satisfactory operation can be obtained if a small magnetic field is present at the cathode. This field may be provided either by such methods as providing additional holes in the magnetic shield,

* *Standard Telephones & Cables Ltd.*

which will permit a small leakage of field into the cathode region, or by designing the magnetic shield to give a gradual increase in field which will not affect the convergence of the electron beam, as in Fig. 2. Both methods give similar focusing but the latter has the advantage that it sometimes makes it possible to bring the magnetic shield outside the tube envelope.

The magnetic field must extend the whole length of the tube in order to keep the beam focused as it travels through the helix. On early tubes this field was provided by solenoids, but their power dissipation and weight make it desirable to use a permanent magnet system if possible. A continuous magnetic field up to 600 gauss can be provided over a length of six or eight inches fairly readily. In order to reduce the bulk, material with a high $(BH)_{max}$ product is used, such as Alcomax III. Since the maximum working coercivity is around 600 gauss, higher fields require a change in shape to something like a horse-shoe magnet, with a corresponding increase in size. Even at this field the stray fields are very large, as the magnetic conductance inside the magnet and surrounding the electron beam is only a small fraction of that outside the circuit. These stray fields may affect other equipment and also mean that any magnetic material in them will affect the focusing field. Consequently, it is necessary to screen the circuit over a considerable volume. Any increase in the length over which the field is required gives a linear increase in all the dimensions and, consequently, an increase as the cube of the tube length in the volume and weight of the magnet.

An elegant solution which greatly reduces the stray magnetic field and changes the total magnet volume from a cubic to a linear dependance on the length of the tube is provided by periodic magnetic focusing. The focusing of the electron beam depends on the square of the magnetic field and hence it should not be affected by sudden reversals in the direction of the field. Perfectly sharp reversals are not possible since they would require pole-pieces of infinite permeability extending to the axis and Fig. 3 shows a typical practical assembly where the field has an approximately sinusoidal shape. If this period is near the wavelength of cyclotron oscillations on the electron beam a resonance effect will occur causing a progressive spreading of the beam with zero transmission. Partial focusing of the beam may be obtained at longer periods than that at which this 'stop-band' occurs, but this will involve electrons crossing the axis and depend critically on the shape of the field. For satisfactory operation it is necessary to use a considerably shorter period than that giving resonance and this is easier at higher voltages. The holes in the pole-pieces are comparable to the magnet length for these short periods and, consequently, the axial field is considerably lower than the coercivity of the magnet material. Even with ferrites a field equivalent to 600 gauss in the uniform case is near the maximum that can be obtained in practice. The reversal of successive magnets gives a very low net magneto-motive force between the ends of the circuit with very small stray fields and a considerable resistance to demagnetization. An increase in length requires only the addition of further periodic elements of the same size and not a corresponding increase in the magnet cross-sectional area.

The principal factors determining the power output and how it may be obtained have now been discussed. The other radio frequency characteristics of importance are the gain and the distortion which may occur, and these will be influenced mainly by the design of the helix and the central attenuating region. The gain necessary will depend on the output of the stage driving the travelling-wave tube, generally a high level mixer, and may vary from 1mW to 25mW depending on the system. There is little difficulty in making the helix long enough to give up to 40dB gain at 5W output but the less gain required the shorter the overall length of the tube can be.

One of the main causes of distortion in frequency-modulated radio links is time delay variation in long lines due to impedance mismatches. One such long line will exist between the mixer stage and the aerial, passing through the travelling-wave tube, and to prevent distortion the attenuation backward through the tube should be of the order of 30dB greater than the forward gain. This attenuation is provided by a central lossy region consisting of a resistive layer on the helix supports. A reverse attenuation of this magnitude is, of course, also entirely adequate to ensure that there is no chance of oscillation or instability caused by feedback.

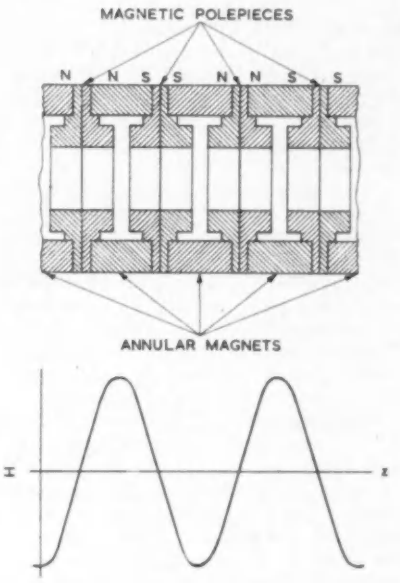

Fig. 3. Element of periodic magnetic circuit

Similar distortion can occur in the waveguide feeders at the input of the tube and between the output and the aerial. This distortion can be minimized by matching the tube very carefully over the required band. A trimming device is generally necessary to obtain a voltage reflection coefficient of less than 2 per cent at the centre frequency and, to keep this less than 5 per cent over a band of about ± 10 Mc/s or more, the reflections on the helix itself must be eliminated as far as possible. Such reflections are amplified by the usual gain mechanism of the travelling-wave tube and, since they are a number of wavelengths away, cannot be cancelled over a wide band by trimming at the output. This means that the attenuating region described above must be tapered to provide a small reflection coefficient, but not tapered over too great a distance or the gain and efficiency will suffer, and also that any irregularities in helix pitch must be kept very small, since these too can give reflections. The turn-to-turn variation of pitch needs to be about 1 per cent or less. Periodic errors in particular must be avoided since these will give a poor response at those frequencies where the errors are an integral number of half-wavelengths apart.

The matching of both waveguide and coaxial line to the helix in travelling-wave tubes is now well established and although coaxial feeders are preferable for the fullest use of the inherent bandwidth of the travelling-wave tube they offer fewer advantages over the more restricted band, less than a quarter of the operating frequency, generally available

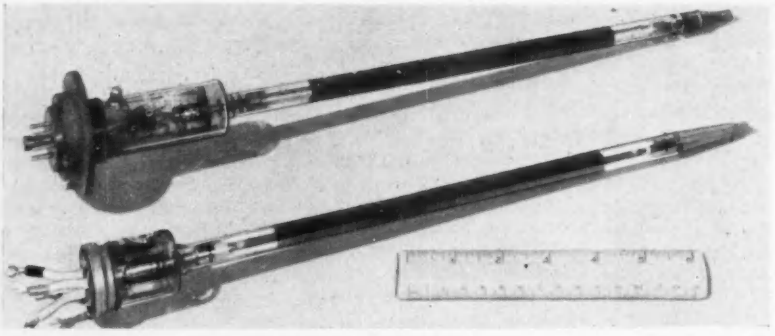

Fig. 4. CV2188 and W7/3G valves

for microwave communications. Since the filters, isolators and aerial feed are almost certain to use waveguide in high quality systems, it seems desirable to use this also for the travelling-wave tube, provided that no great increase in bulk is necessary. This is the case at 4000Mc/s, particularly if a slightly thinner guide than usual, of aspect ratio 3 : 1, can be used.

The user will not be content solely with the basic technical requirements specified above but must also be able to reproduce them economically and with reliability. This means that the tube should have a long life, be easy to set-up and replace, simple to monitor and not too expensive. As regards monitoring, the currents taken by the various electrodes and the voltages necessary are generally a sufficient indication of the satisfactory performance of the tube and also show when it will soon be necessary to replace the tube because of a deterioration in focusing or emission.

The application of these principles is illustrated in the W7/3G, developed from the CV2188. Full descriptions of both tubes have been published elsewhere[1, 3]. Photographs of them in Fig. 4, show the similarities and differences. Table 1 gives the typical average performance figures of both tubes at 4000Mc/s. The cathode area has been increased five times in the W7/3G so that despite the higher beam current the cathode density is considerably less. This has required the use of a convergent electron gun, the field shape in the electron-gun region being controlled by a pole-piece outside the tube. Thus the electron gun, although using ceramics instead of micas for alignment, is basically as simple as in the earlier tube and easily outgassed and processed. Developments in the winding of the helix and the distribution of the central attenuation give a better output match and the maximum gain and efficiency. A modified collector design is used to provide a greater mating area to the forced-air cooler to permit an increased power dissipation.

It is of considerable importance that the location of the valve in its circuit should be positive and central. In both tubes the cooler is held accurately central but allowed to pivot to permit minor alignment errors, one difference being that the cooler for the W7/3G is spring-loaded to the collector so that access to secure it is not normally necessary. At the gun end the CV2188 was held by a plastic flange cemented to the octal base after assembly but the W7/3G uses a flying lead base, to decrease the overall length, surrounded by a "Nilo K" ring. The ring locates the tube in the circuit and can be accurately aligned with the gun and helix during manufacture. Some slight adjustments to the focusing are desirable after the tube has been inserted in the circuit since it is worthwhile to work with the minimum helix current in every case despite variations in the exact alignment of different tubes and circuits. Deflector coils mounted around the electron gun provide a very convenient means of doing this, saving the complication of mechanical adjustments and the need to provide access to the circuit for these. The currents in these coils may be easily controlled from the most convenient point. The use of deflector coils in the W7/3G, despite the convergent electron gun, is possible since the magnetic screening is completely outside the tube and can surround the coils.

TABLE 1.

Typical Performance of CV2188 and W7/3G, (4000 Mc/s)

	CV2188	W7/3G
Helix voltage	3kV	3kV
First anode voltage	1·2kV	2kV
Collector current	14mA	40mA
Helix current	1·5mA	1mA
Maximum output power ..	2·5W	9W
Operating level	1·5W*	5W†
Attenuation	45dB	60dB
Band of output match to 5 per cent reflection	10Mc/s	30Mc/s

* *25mW input.* † *7 mW input*

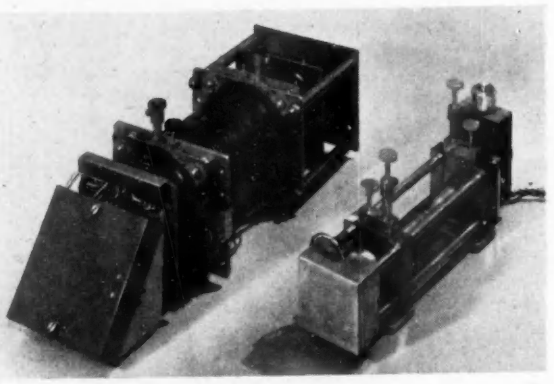

Fig. 5. CV2188 and W7/3G circuits

A separate first anode is used in both tubes to adjust the beam current to the nominal required value and a control circuit keeps this current constant despite any variations in emission, thus ensuring that there is no change in tube performance. The ordinary regulation of the mains supply keeps the other tube voltages sufficiently constant.

A periodic permanent magnet circuit has recently been developed for the W7/3G. Fig. 5 shows this circuit and also the solenoid used for the earlier CV2188. The gain and power output in a periodic circuit is about 1dB worse than that obtained in a corresponding solenoid circuit but this is compensated by the saving of 100W of solenoid power and 60 lb. of total weight. The periodic circuit is not affected by stray fields and it has considerable resistance to demagnetizing forces. Even touching the circuit with iron tools has no permanent effect on it. One substantial difference arises from the fact that focusing is not satisfactory below a certain voltage in a periodic circuit and, consequently, the full voltage must be switched on immediately.

Waveguide input and output is used on both tubes, the internal dimensions being 2 in. × 0·667 in. A flag-tuner in the guide can be adjusted to give a satisfactory match at the operating frequency.

There are other possible approaches to the design of the output travelling-wave tube. One such is the use of a higher perveance beam than that described here leading to a somewhat shorter tube with a continuous field provided by a permanent magnet. Periodic focusing is not usually possible in this case owing to the lack of permanent magnet materials of sufficiently high coercivity. The bulk when a permanent magnet is used is generally greater than that required by periodic focusing, particularly because of the shielding requirements. Moreover the high perveance gun may require screening inside the envelope, which makes the tube more expensive and also some mechanical movement necessary, since deflector coils outside the tube would be ineffective.

Another possibility is the supply of tubes complete with their circuits so that no adjustment of focusing or matching is necessary when changing tubes. In the author's experience, however, operators very quickly become accustomed to the routine for setting-up a travelling-wave tube and the supply of 'packaged tubes', with the added requirement of breaking and making the coaxial or waveguide connexions, would offer few advantages. Against them must be set the added cost of such tubes, particularly in multi-channel systems where separate stocks of spares would have to be kept for each frequency used.

Extensive experience with travelling-wave tubes in systems installed in many parts of the world has confirmed their reliability and ease of operation. Continued development of the W7/2D has suggested minor modifications which have greatly improved the life compared with the first tubes used in the Manchester-Kirk O'Shotts link. For example, results from one recent system indicate an average life of well over 9300 hours.

Low Noise Tubes

The system designer has had no readily available alternative to the travelling-wave tube for the output stage of radio relay links; for the input stage however, the travelling-wave tube must compete with the crystal mixer which has been very extensively developed. It is only in more recent years that better noise factors than those given by crystal mixers have been obtained from travelling-wave tubes and even so the disadvantages of the increased bulk and power supply requirements of the travelling-wave tube may outweigh the advantages of its improved performance. Nevertheless it has been necessary to develop low-noise tubes to decide this question and further improvements, either in noise factor or by reducing the size, may make their use more general.

The fundamental cause of noise in a travelling-wave tube is the current and velocity fluctuations of the electron beam which arise from its emission from a hot cathode. To obtain a low noise factor it is necessary to reduce this noise relative to the input signal and this can be done by appropriate acceleration of the electron beam in the gun region before it enters the helix. A complete theoretical treatment of the problems involved is not yet possible, but by making some plausible assumptions the basis of a design can be arrived at and improved by experiment. The electron gun which results uses a small cathode with a focusing electrode giving a slightly divergent beam, a first anode to control the current and one or more anodes before the final one at helix potential. These adjust the relative magnitude of the fluctuations arising from the velocity and the current variations at the potential minimum in front of the cathode. A drift tube, following the final anode of the gun, preceeds the helix and in this the current fluctuations tend to change into velocity fluctuations and vice versa due to space charge forces. The length of this drift space is chosen to give the optimum phase relations for minimum noise. The anode voltages may be adjusted for minimum noise factor but varying one alone will slightly affect the optimum drift tube length. Hence, if one can vary the potential of several anodes, and the focusing electrode as well, a better noise factor is likely to be achieved, but the setting-up for this, due to the interaction between the electrode potentials, will be considerably more complicated.

It is also essential to have very good focusing since any intercepted current will lead to partition noise. As a general rule, the intercepted current should be less than 0·5 per cent of the total current. This, with the electron gun considerations, forces one to work with small beam currents and, consequently, even at low voltages, the gain per unit length is low.

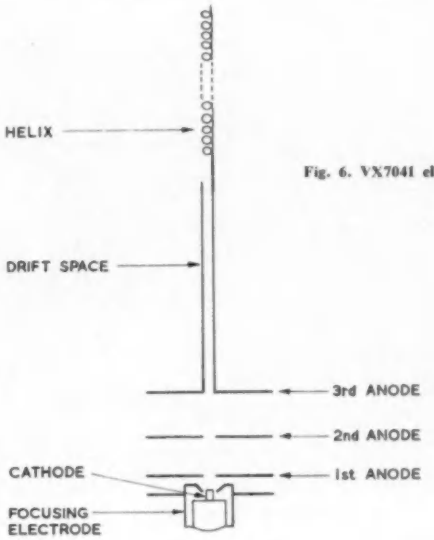

Fig. 6. VX7041 electron gun

A typical low-noise travelling-wave tube, developed with the possibility of use in microwave radio links in mind, is the VX7041*[4]. Fig. 6 shows the basic elements of the electron gun. While the principles outlined above are employed, the construction has been made as simple as possible to use. The focusing electrode works at cathode potential and in addition to the current controlling anode and that at helix voltage, only one further noise-reducing anode is used. Fig. 7 shows the complete tube and circuit. Apart from the use of a low-noise electron gun, and a smaller helix for operation at 900V, the construction is very similar to that described for the W7/3G. Table 2 gives some typical performance figures. A rather high magnetic field, for this current and voltage, is necessary to give the very good focusing.

In operation the tube fits into the circuit in a similar way to the W7/3G and the focusing is adjusted solely by deflector coils, no mechanical movement being necessary. Adjustments are then made to the first anode voltage to give the required collector current, the helix voltage to give maximum gain and the second anode voltage to give minimum noise output. All these adjustments are substantially independant and are easily and quickly carried out. Experience has shown that the conditions remain stable with life and that any deterioration in noise factor is due to a fall in emission which will also require an increase in the first anode voltage needed to give the usual collector current. Thus, after the first setting-

* *The development of this tube was supported by the Admiralty.*

up, the d.c. currents and potentials are a very reliable indication of a tube's satisfactory operation.

The gain should be sufficient for the noise in succeeding stages to make only a small contribution to the total receiver noise factor. For a travelling-wave tube of 8dB noise factor, 20dB gain is adequate to ensure this. Time delay distortion will arise in the low-noise stage unless precautions similar to those in the case of the output tube are taken. The VX7041 uses identical tuning means to the W7/3G and attention to the total attenuation, the shape of the taper and the regularity of the helix enables a similar specification to be met.

The output level in any travelling-wave tube in a microwave link should never approach the saturation power output of the tube or distortion will arise due to the conversion of amplitude to phase modulation. The maximum output of the VX7041 is about 10mW which easily satisfies this condition.

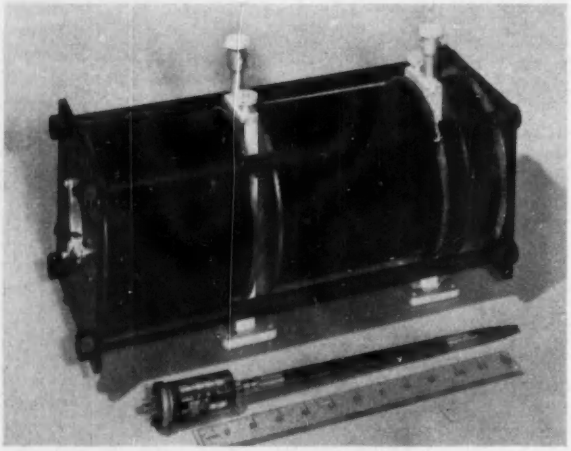

Fig. 7. VX7041 tube and circuit

The solenoid used for the VX7041 is rather bulky and consumes a considerable amount of power. Unfortunately periodic focusing cannot at present be used without a loss in performance. The period at this relatively low voltage must be very short and the ferrite materials at present available do not make it possible to obtain, with this short period, a high enough field to give the very good focusing required. Again the total length of helix and drift tube means that a very bulky magnet would be necessary to give a uniform field. This additional bulk militates against the use of low-noise tubes in microwave radio links under ordinary conditions.

Intermediate Level Tubes

The design of tubes with an intermediate power output, of the order of 100mW is rather simpler than in the case of high power tubes or low-noise tubes since the problems of focusing high perveance beams or of obtaining very low noise factors, the fundamentals of both of which are not fully understood, do not arise so acutely. On the other hand less time has been devoted to the design of such tubes for microwave radio links because of the apparently limited field of application of all travelling-wave tube repeaters, which would be their principal use.

TABLE 2.

Typical Performance of VX7041 at 4 000Mc/s.

Helix voltage	900V
Collector voltage	1kV
First anode voltage	50V
Second anode voltage	200V
Collector current	0·5mA
Helix current	2μA
Gain	20dB
Noise factor	8dB
Attenuation	55dB
Bandwidth of input match to 5 per cent reflection	30Mc/s

The basic features of ease of operation and lack of distortion can be met substantially as described in connexion with other types of tubes. An intermediate level tube can, however, have a much greater gain per unit length than either the low noise tube, necessarily restricted to a low current, or the output tube, which requires a fairly high voltage. The size can then be considerably smaller and permanent magnet focusing presents few difficulties whether periodic, if the voltage is around 1kV, or a continuous field for lower voltages.

An early tube[5] suitable for this application is the CV2358. This has a gain of 25dB, a maximum output about 150mW, and operates at 1·5kV, 5mA. Once again the tube plugs into its circuit and the focusing is adjusted by deflector coils. Using more modern techniques and the construction of the W7/3G, a higher gain and lower voltage operation could readily be obtained.

The CV2358 has been extensively used by the G.P.O. as a frequency changer[6] and this application is important in an all travelling-wave tube repeater. If the helix voltage is modulated and the tube is driven near saturation with the microwave frequency signal, sideband outputs are obtained about 6dB down on the maximum output power. This is a very convenient level for driving an output travelling-wave tube. In practice, the modulation is applied to the cathode which has a lower capacitance to earth than the helix.

Conclusions

Travelling-wave tubes are very well established as output amplifiers in 4 000Mc/s radio links and while economic considerations do not generally justify their use elsewhere in such systems future development may modify these conclusions. For high capacity links at 6 000Mc/s they are again certain to be used and the smaller bulk consequent on the higher frequency will be a considerable attraction. It is likely that even at 2 000Mc/s the ease of setting-up may make them attractive in radio link equipment. At very high frequencies however, above 11 000Mc/s, considerable problems arise in the development of tubes to give appreciably more than 1W output and the use of oscillators directly, where possible, is likely to be more economical.

A microwave radio channel does not generally extend over more than 20Mc/s, which is about 2 per cent or less of the possible bandwidth of travelling wave tubes. It would be particularly pleasing for the valve designer if other systems engineers, encouraged by this practical success in radio links, were to take full advantage of this potential bandwidth.

Acknowledgments

The author is grateful to Standard Telephones and Cables Ltd. for permission to publish this article.

REFERENCES

1. Rogers, D. C. The travelling-wave tube as output amplifier in microwave radio links. *Proc. Instn. Elect. Engrs. 100*, Pt. 3. 151 (1953).
2. Burke, P. F. C., Rogers, D. C. Magnetic focusing of long cylindrical electron beams. *L'Onde Electrique. 37*, 174 (1957).
3. Burke, P. F. C. A Travelling-wave tube for 4 000Mc/s Radio Links. Paper presented at I.E.E. Convention on Microwave Tubes, May 1958.
4. Burke, P. F. C., Pohl, W. J. A 4 000Mc/s low-noise travelling-wave tube. *Le Vide 11*, 303 (1956).
5. Rogers, D. C. Travelling-wave amplifier for 6 to 8 cms. *Elect. Commun. 26*, 144 (1949).
6. Bray, W. J. The travelling-wave tube as a microwave phase modulator and frequency shifter. *Proc. Instn. Elect. Engrs. 99*, Pt. 3. 15 (1952).

REFLEX KLYSTRONS

By A. H. Atherton*, B.Sc., A.M.I.E.E.

A general description of the construction and operation of reflex klystrons is given, so that the characteristics and performance of this type of valve can be appreciated by the systems engineer. Typical examples of reflex klystrons are described, and brief details are given of practical operation.

At very high frequencies, and especially in the microwave band above 2 000Mc/s, the use of negative grid valves as oscillators becomes increasingly difficult, mainly due to the necessity for keeping the cathode to grid transit time to below a small fraction of one cycle of the operating frequency. In a normal triode oscillator, amplitude modulation is imposed on the electron beam by means of the negatively biased control grid, and the beam is, therefore, modulated while it has a velocity corresponding to an energy of 1 to 2eV. With such a low electron velocity, the cathode to grid spacing cannot be made small enough to give a low transit time at high frequencies. In the reflex klystron a high speed electron beam, with a velocity corresponding to perhaps 300eV, is velocity modulated by the r.f. field. It is this higher beam velocity, resulting in a lower transit time, which enables the reflex klystron to operate efficiently with reasonable physical spacings.

An upper frequency limit, at present about 35 000Mc/s, beyond which reflex klystrons cannot be efficiently manufactured, is set by the physical dimensions of the resonant cavity, which must be smaller at higher frequencies. The useful range of reflex klystrons may be said then to lie between 2 000 and 35 000Mc/s; within this range, the reflex klystron is unsurpassed as a convenient low-power oscillator which can be both mechanically and electrically tuned.

General Description

In this article, no attempt will be made to give a mathematical theory of reflex klystrons, since this is already available in the literature[1,2]. Instead, a descriptive account of the operation of reflex klystrons will be given, which should enable the user of these valves to understand their operating characteristics and properties.

The essential electrodes of a reflex klystron are shown in Fig. 1, and consist of a resonator, an electron gun, and a reflector. The resonator, which is the r.f. circuit, is a re-entrant cylindrical structure with physical dimensions such that it will resonate at the desired operating frequency; in terms of the normal *LC* resonant circuit, the inner gap in the resonator may be said to be capacitive, the outer part of the resonator being inductive. The essential features of the resonator are that it is a high-*Q*, low-loss resonant circuit, which has a high r.f. field at the gap where the electron beam is modulated. Energy from the resonator may be extracted either by an inductive loop coupled to a concentric line, or by an iris coupled directly to a waveguide. The electron gun provides a beam of electrons which is focused through the resonator aperture, passes through the gap and is reflected by the negative field between the reflector and the resonator; the beam shape being such that a high proportion of the original beam is transmitted back through the gap.

In the first passage through the resonator gap, the interaction between the r.f. field and the electrons causes a velocity modulation of the beam, electrons passing through the gap when the field is positive being accelerated, those passing through when the field is negative being decelerated. After leaving the resonator, the different relative velocities of the electrons in the beam result in bunches of electrons being formed so that the velocity modulation is converted into amplitude modulation. If the beam is reflected back through the gap and the phase conditions are such that the bunches are retarded by the r.f. field, energy will be given up to the field and the valve can oscillate.

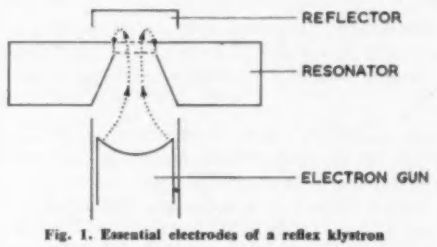

Fig. 1. Essential electrodes of a reflex klystron

Two conditions must be satisfied before the valve will oscillate with maximum efficiency. First, the time taken for the beam to travel from the gap, into the reflector field, and back again (the transit time) must be such that the r.f. field exerts a maximum retardation on the bunches in order to extract as much energy as possible, and it can be shown that the transit time must be $n + \frac{1}{4}$ cycles, where n is 1, 2, 3, 4, . . . The transit time can be varied by adjusting the reflector potential; making the reflector more negative increases the field and reduces the transit time. Since n is multi-valued, the valve will oscillate for several values of reflector potential, the transit time being $1\frac{1}{4}$, $2\frac{1}{4}$, $3\frac{1}{4}$, . . . cycles. A valve oscillating with any particular value of n is said to be operating in the $n\frac{1}{4}$ mode, the valve operating in each mode over a range of reflector potentials which cause the valve to start oscillating, rise to a maximum as the phase condition is satisfied, and then fall off again to zero. As the reflector potential is increased from zero to a high negative value, the power output characteristic is, therefore, as shown in Fig. 2. In setting up a reflex klystron, the reflector potential must be adjusted so that the valve is operated in the chosen mode, and the potential required will depend not only on the mode but on the frequency, since the transit time will vary with frequency.

The second condition that must be satisfied for maximum

* *Research Laboratories of Electric & Musical Industries Ltd.*

power output is that the bunching must be as efficient as possible, i.e. the current density in the bunches must be as high as possible. At any particular time after modulation, the degree of bunching will depend on the relative velocities of the electrons in the beam (the degree of velocity modulation). Since the transit time is determined by the condition that the phase-angle of the returning beam shall be correct, optimum bunching can only be realized by adjusting the degree of velocity modulation to some suitable value. The degree of velocity modulation depends on the r.f. field in the resonator, so the bunching can be adjusted to the optimum value by varying the r.f. field. In practice, this is done by adjusting the coupling to the load until the power output is a maximum; increasing the load decreases the effective resonator impedance and reduces the r.f. field. Since the valve oscillates most efficiently with a high r.f. field at the gap, requiring a low bunching time, the valve is usually more efficient for lower reflector modes, as is seen in Fig. 2, where the peak power in each mode decreases as the mode number increases.

The bunched electron beam corresponds to the amplitude modulated beam of a negative grid oscillator, but it

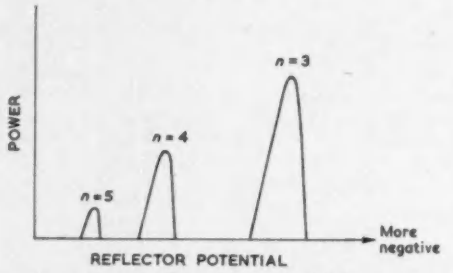

Fig. 2. Power output—reflector potential characteristic

should be noted that in a reflex klystron the amplitude distribution of charge along the beam does not follow a sine or cosine law. A detailed mathematical treatment shows that the modulated beam contains the fundamental frequency and an infinite number of harmonics, the amplitude coefficients being given by a Bessel function of the first kind. Of these, only the fundamental is of importance, since the r.f. losses in the resonator are too great for the harmonics to be sustained.

Tuning

Mechanical Tuning

To change the frequency of oscillation, the resonant frequency of the resonator must be changed, and this can be done in two ways. In the first, the capacitance at the resonator gap is varied by physically moving the two ends of the cavity apart. The tuning rate is very high, typically 500Mc/s for 0·001in movement of the gap, so that a very accurate slow motion mechanism is required. The tuning mechanism should not show hysteresis (i.e. after traversing the full tuning range the frequency should return to its original value as the tuner is returned to its original position); it should be rugged, non-microphonic, insensitive to temperature or atmospheric pressure changes, and preferably inexpensive to manufacture. With all these requirements in mind, it is not surprising that the design of this type of tuning mechanism is one of the most difficult parts of the design of oscillators, and has probably not yet been satisfactorily solved. The second method of tuning is to alter the inductance of the resonator, either by changing the effective diameter or by introducing material of a different dielectric constant. Many early klystrons had large diameter screws which entered the resonator wall radially to change the effective diameter, and wide-range tuning devices have been produced in which part of the outer walls of the resonator are formed of movable arms, the lack of circular symmetry apparently having little effect on the electrical performance of the valve. A third method of mechanical tuning is to tune a close-coupled external resonator and so pull the frequency of the klystron cavity. Since the external resonator design is not restricted by considerations of beam coupling, and since it is not in vacuum, the mechanical problems are much less difficult than the gap capacitance tuner to which it is essentially similar. Some loss of valve performance is to be expected, but the improvement in tuner properties, especially in simplicity and ruggedness, is so great that the sacrifice of electrical properties is worth while.

In general, the wider the tuning range demanded from a valve, the more difficult, and expensive, will be the design of the tuner. Except for bench oscillators, where a wide frequency range is obviously necessary, the tuning range demanded from the valve should be no greater than is required for the particular application.

Electronic Tuning

If the transit time in the reflector space is varied slightly from the optimum, by means of a change in reflector potential, the bunches of electrons will no longer return in the correct phase and the beam may be said to have a reactive component. Since the frequency of oscillation is determined by the condition that the total reactance of the beam and cavity must be zero, the frequency of oscillation must change. This frequency change results in some amplitude modulation, because of the increased resonator losses, but tuning ranges of the order of $\frac{1}{2}$ per cent can be achieved between the points where the output falls to 50 per cent of its peak value (the so-called half power points). This electronic tuning of the reflex klystron is one of its most useful characteristics, since the tuning is effected by the high impedance reflector electrode, and low modulating powers are required.

The electronic tuning range varies with the cavity loading and with the reflector mode; in general, the higher the loading and the higher the mode, the greater the electronic tuning. Since the valve efficiency is normally less at the higher reflector modes, some compromise in design is necessary between power and electronic tuning.

Hysteresis

One of the problems encountered in the use of electronic tuning is that of hysteresis, i.e. the multiple dependence of power and frequency on reflector voltage. A typical example is shown in Fig. 3. As the reflector voltage is increased, the power gradually falls off to zero; as the reflector voltage is then reduced, the power curve does not follow the original curve, but suddenly jumps into oscillation as shown in the figure. The frequency may vary continuously or may have discrete jumps, depending on the cause of the hysteresis.

One of the worst causes of hysteresis, multiple electron transits through the resonator gap, is well understood, and is under the control of the valve designer. In a well designed valve, any hysteresis present should not approach the half power points, and hence will not affect the practical performance of the valve. Other causes of hysteresis, however, are under the control of the valve user. If the valve is mismatched into the guide, or if a mismatched load is used, especially if the line is of considerable length, hysteresis or frequency jumping can be expected. A more troublesome cause of hysteresis arises where the resonator can support more than one mode of oscillation (i.e. is resonant

at more than one frequency), and the reflector potential for both modes is nearly the same. The transitions from one mode to the other will occur at different points, depending on the direction of change of reflector potential. The effect is more confusing since the receiver may not be sensitive to the frequency of one of the modes, and the observed effect can then easily be confused with multiple transit hysteresis. If the cavity design cannot be modified to eliminate the unwanted mode, some form of mode suppression must be used, which will absorb energy from the unwanted mode, but not from the required mode.

Klystron Design

Type of Resonator

The resonator of a reflex klystron may be totally enclosed within the valve envelope (internal resonator), the power being extracted through a vacuum sealed concentric line or through an insulated waveguide output window. Alternatively, the upper and lower walls of the resonator



Fig. 3. Typical example of hysteresis

may be sealed through the envelope (disk seal construction), so that part of the resonator is external to the valve and is available for tuning and power extraction.

The advantages of the totally enclosed resonator are that it has less r.f. loss, and the mechanical design of the valve is simplified, particularly where the all-metal valve construction is used; for very high frequency valves where the resonator is very small, this is the only possible construction. The main disadvantage is the difficulty of extracting power from the resonator. The use of a concentric line output is not entirely satisfactory, since it is not possible to control the coupling accurately, with the result that provision must be made for matching the valve into the waveguide to achieve optimum operating conditions. With a waveguide output, the matching from valve to valve can be held quite accurately, and is set by the valve designer so that, when feeding into a correctly terminated waveguide, the valve is working under optimum conditions. This is particularly important in military applications, where adjustments must be reduced to a minimum.

If the disk seal construction is used, the problems of power extraction and tuning are greatly simplified; the main difficulty is of r.f. loss in the part of the glass envelope that lies within the cavity. One method of reducing this is to operate the cavity in a harmonic node, such that the glass is located at a voltage mode. This technique has the additional merit of increasing the diameter of the cavity, so that the physical dimensions of the envelope need not be too small. It may, however, still cause some loss of efficiency, and, since a harmonic cavity can support several modes, it may introduce the possibility of mode interference in the tuning characteristic.

The use of a disk-seal valve makes possible the design of plug-in valves, in which the external part of the cavity is not integral with the valve, but is considered as part of the microwave 'plumbing'. In the valve, the resonator diaphragms are formed of two copper pressings sealed into the glass envelope, and are suitably shaped to enable contact to be made to the external cavity. This technique of making the valve a plug-in replacement, independent of the main cavity, has several advantages:

(a) The resonator and tuning mechanism can be designed for the particular application required, and hence can be designed more efficiently.

(b) Considerable economy results from the fact that valve replacement does not involve replacement of the expensive cavity and tuning mechanism.

(c) One valve will cover a wide variety of applications, leading to more economical manufacture and stores maintenance.

On the other hand, the valve must be tested by the manufacturer to much closer limits, since it may be required to operate in many different types of cavity.

Typical Reflex Klystrons

A list of reflex klystrons of British manufacture has been published[3], and no attempt is, therefore, made to summarize the characteristics of the many types available. Instead, three valves will be described, which will illustrate the electrical characteristics and different methods of physical construction described earlier. The R5146 is an internal cavity valve; the R5222 is a disk-seal plug-in valve, both designed for use in radar receivers and for general bench work. The third valve, the R6010, was designed for use as the transmitting valve in an f.m. centimetric radio link, and is an example of a high-power oscillator in which particular attention has been paid to the linearity of the electronic tuning characteristic.

Valve Type R5146

The R5146 was designed for the 8·5mm microwave band, and is an example of a valve design suitable for the highest frequency for which reflex klystrons are available. The essential electrode structure of the valve is shown in Fig. 4; the complete valve is shown in Fig. 5.

The resonator cavity, which is approximately 3mm in diameter and 1mm high, has a 0·020in aperture through which the electron beam must be focused and returned after reflection. If the aperture is appreciably larger than this, the coupling between the resonator and the beam is reduced, with a corresponding loss of efficiency. The size of the resonator aperture sets a lower limit to the resonator potential required for efficient operation. As the potential is decreased, not only is the coupling between the beam and the r.f. field decreased, but less of the initial beam returns through the gap because of mutual electron repulsion in the beam (space charge spreading). In the R5146, the resonator potential is 2kV, a 10mA beam being used.

Power is extracted through a slot in the outer wall of the resonator, a tapered waveguide providing a smooth transition to standard Q-band guide. The problem of transmitting the power through the metal valve envelope is solved by the use of a glass window designed so that a standing wave ratio of better than 1·2 is achieved over the operating frequency range; ditched chokes are used to prevent leakage of power where the internal and external waveguides face the window. The valve is tuned by changing the gap spacing mechanically. An external screw and lever mechanism is connected, through a flexible diaphragm at the top of the valve envelope, to the reflector support which, in turn, is connected to the flexible upper surface

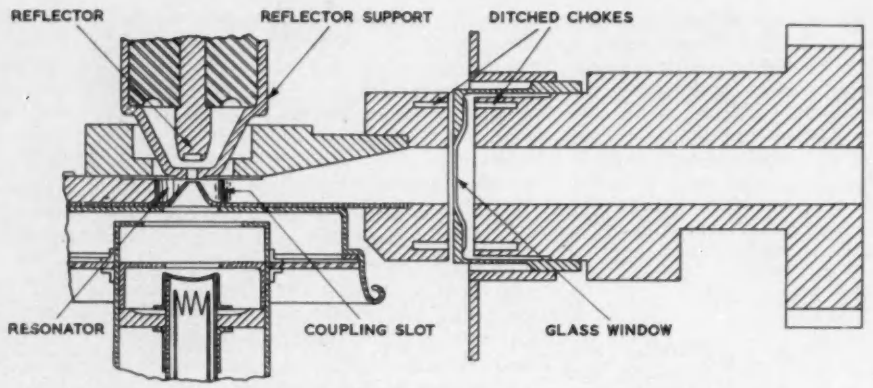

Fig. 4. Essential electrode structure of valve type R5146

Fig. 5. Photograph of valve type VX5023

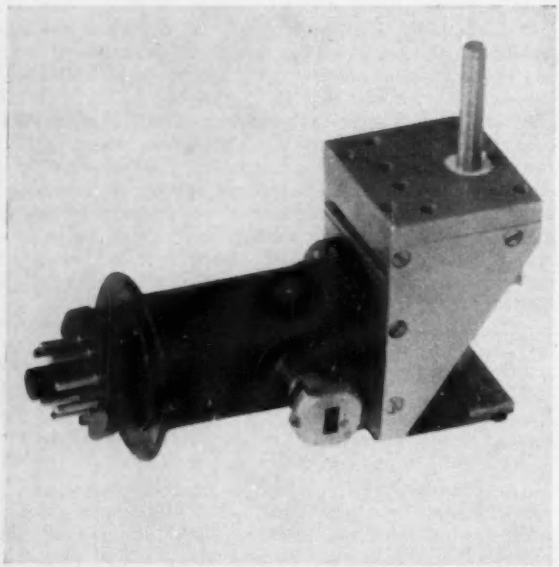

of the cavity. The coupling between the cavity and the output waveguide is set by the dimensions of the output slot, and is designed so that, when the output power is fed into correctly terminated Q-band waveguide, the valve is adequately matched over the operating frequency range. The only adjustment required in setting up the valve is, therefore, to set the frequency and to adjust the reflector potential for the optimum power. Two reflector modes are normally used ($n = 4$ and 5). In the $4\frac{1}{4}$ mode the output power is typically 50mW, the electronic tuning range 60Mc/s, and the reflector potential −350V. In the $5\frac{1}{4}$ mode, the power is typically 30mW, the electronic tuning range 90Mc/s, and the reflector potential −225V. The mechanical tuning range is approximately 15 per cent of the nominal frequency. (To cover a wider frequency range, modifications to the cavity design must be made, and a range of valves is available covering 7·5 to 12·5mm.) Over the tuning range, the reflector potential, in the $5\frac{1}{4}$ mode, changes from −190 to −250V in a linear manner, while the electronic tuning rate is of the order of 2Mc/s/V. It should be noted that all voltages are measured with respect to cathode, although in normal operation it is found more convenient to operate the resonator at earth potential.

Valve Type R5222

The R5222 is a 3·2cm (X-band) general purpose reflex klystron with an external resonator cavity. The physical dimensions of of an X-band resonator are sufficiently great to enable a relatively large resonator aperture to be used, the beam coupling being kept high by the use of grids across the two resonator apertures. Because of the large apertures, a low impedance electron beam can be used, 30mA at 300V, so that d.c. supplies for the valve can conveniently be supplied from normal power packs. The power output from the valve, operating in the $4\frac{1}{4}$ mode, is typically 50mW, with an electronic tuning range of 15Mc/s; the tuning sensitivity being 0·45Mc/s/V. By a modification to the design of the cavity, the electronic tuning range may be increased to 30Mc/s, with little or no loss of power, although the mechanical tuning range is restricted. The nominal frequency range of the valve, in suitable cavities, is 8 500 to 10 000Mc/s although, experimentally, the valve has oscillated from 5 000 to 12 000Mc/s.

Special efforts have been made to ensure that the electrical characteristics are reproducible from one valve to another. The limits within which 90 per cent of all valves would be expected to fall are approximately as follows:

Power		±11mW
Frequency	(in standard cavity)	±33Mc/s
Reflector potential		±16V
Electronic tuning rate		±0·08Mc/s

Control of characteristics to such fine limits means that very little adjustment need be made when a valve is changed in an equipment. Ideally, no adjustment should be necessary, and efforts are continually being made, both in valve design and in accuracy of manufacture, to reduce the spread in electrical characteristics.

The R5222 is a plug-in valve, and hence must be inserted into a suitable cavity before it will oscillate. A range of cavities has been designed for the valve, but it is anticipated that the user will, in general, want to design special cavities for specific applications. A fuller account of cavity design for this valve is available[4], and only a brief outline of the possible types of cavity will be given here.

The lower conical resonator electrode (or 'copper') is, in use, clamped between matching surfaces, so that a low-loss r.f. connexion is made, and, at the same time, the valve is located in the external cavity. Contact to the upper copper is made by specially designed spring fingers. The external cavity may take the form of a concentric line or a radial line, the length of the line being $(2k + 1)\ \lambda/4$ where k is 0, 1, 2, 3, . . . The choice of the value of k used will depend on the frequency of operation required, and on the physical limitations of the cavity design. In

general, k should be as low as possible, to maintain valve efficiency and reduce the possibility of mode interference. At the centre of the operating frequency range, the valve is designed to operate in a harmonic cavity, with $k = 1$, the voltage node being located near the glass envelope to prevent r.f. losses.

The radial line cavity is less suitable for very wide tuning ranges than a concentric line cavity, but is simpler mechanically and easier to design. A simple fixed frequency cavity is shown in Fig. 6. The clamping piece for the conical copper and the spring fingers for the cylindrical copper can clearly be seen, together with the coupling iris and waveguide output. A simple tunable cavity is shown in Fig. 7. The tuning is effected by inserting a ceramic rod into the resonator, the higher dielectric constant of the rod causing a reduction in frequency. A micrometer screw thread gives a precise and simple tuning control. A tunable cavity for wider frequency bands is shown in Fig. 8. The two movable side arms are of the non-contacting type, choked to prevent losses. Up to 20 per cent tuning range can be obtained with this type of tuner, which is very suitable for general bench measurements. With the concentric line cavity, the length of the line is varied by means of a non-contacting piston, and the resonant frequency of the cavity can be varied over very wide limits. Where extremely wide tuning ranges are essential, concentric line cavities are to be preferred, but their main disadvantages are the increased difficulty in arranging coupling to a waveguide, the greater possibility of mode interference, and the increased mechanical complexity.

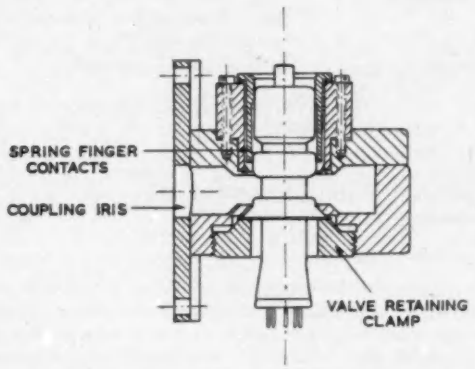

Fig. 6. Fixed frequency cavity for valve type R5222

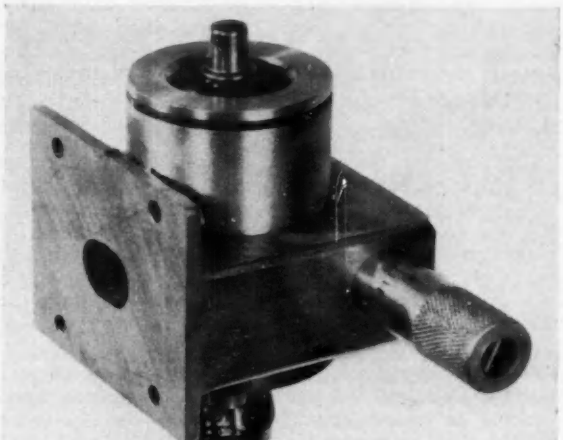

Fig. 7. Tunable cavity for valve type R5222

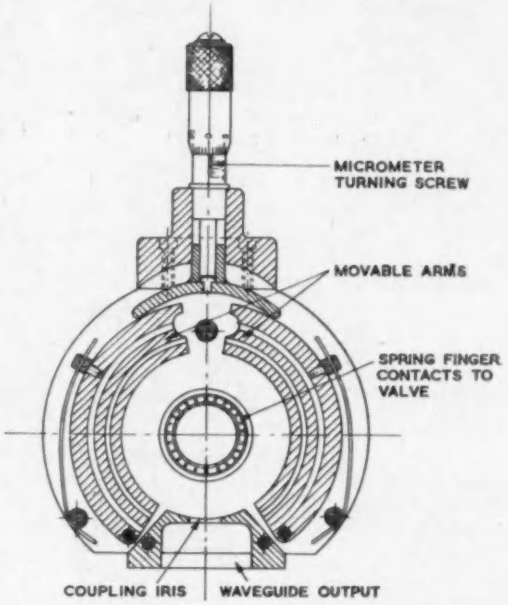

Fig. 8. Wide-band tunable cavity for valve type R5222

In designing a cavity for a plug-in valve such as the R5222, the following rules should be observed:

(a) Choose a symmetrical structure.

(b) Use the simplest approximation to a resonant line, k being kept as low as possible.

(c) Use the simplest possible form of tuner, with as small a tuning range as possible.

(d) Avoid unnecessary r.f. losses, both in the cavity and the contacts.

Valve Type R6010

The R6010 was designed specifically for use as an f.m. transmitting valve, where output powers of the order of 5W are required, and where the reflector voltage-frequency characteristic must be linear in order to prevent distortion and inter-channel modulation. A cross-section of the valve is shown in Fig. 9. The resonator must dissipate 100W of power and is, therefore, made an integral part of the valve envelope to facilitate cooling. The use of a harmonic resonator would impair efficiency and electronic tuning range, so the disadvantages of an internal resonator must be accepted. Power is extracted via a loop and concentric line, although a later version of the valve, for a somewhat higher frequency, has been developed with a waveguide output. The earlier electron optical design of gun and reflector allowed some multiple electron transits, so the hysteresis was present; this has now been corrected by a re-design of the gun. The valve is capacitance tuned, a differential screw mechanism providing the slow motion drive required to change the resonator gap.

Typical electrical characteristics of the valve are as follows:

Mechanical tuning range	4 400 to 4 800Mc/s
Resonator potential	700V
Resonator current	140mA
Reflector potential	−275V
Electronic tuning range	50Mc/s
Tuning rate	0·25Mc/s/V

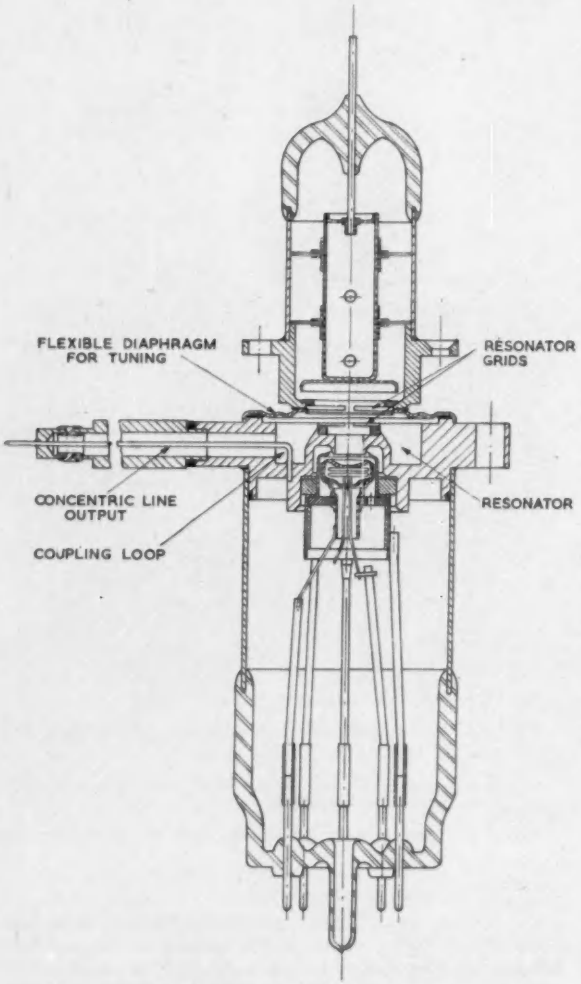

Fig. 9. Cross-section of valve type R6010

The frequency range, over which the tuning rate varies by 1·2/1 is 15Mc/s. The linearity of the tuning characteristic is dependent on the matching into the guide, the standing wave ratio of the load, and on which part of the reflector characteristic is used. Since the optimum linearity is not always achieved under the conditions for maximum power output, some slight sacrifice of power may be necessary if the utmost linearity is required.

Practical Operation

Power Supplies

For general microwave bench testing, it is convenient to have a power pack which is sufficiently flexible to be useful for a wide range of valves. The following supplies are suggested:

Heater.	4 to 8V a.c. continuously variable, rated at 1·5A. Transformer insulated for 500V.
Resonator.	150 to 500V, d.c. rated at 60mA, positive earthed, negative to cathode.
Reflector.	0 to 500V, d.c. rated at 1mA, positive connected to cathode. Transformer insulated for 1kV.
Cathode screen.	As for reflector.

The degree of smoothing required will depend on the type of measurement being made. If the frequency variation with reflector potential is taken as 1Mc/s/V, and the variation of frequency with resonator potential as 0·25Mc/sV, a reasonable estimate of the permissible ripple can be made.

Reflector Scanning

For many measurements, it is useful to have a pulsed output from crystals, wavemeters, or standing wave detectors, since an a.c. amplifier and oscilloscope presentation can then be used. A convenient method of doing this is to modulate the reflector supply with a 500c/s sine wave of amplitude sufficient to scan through one or more complete reflector modes. The oscilloscope picture will then show the reflector modes as in Fig. 2, so that details of mode shape, hysteresis, etc., can be observed. If two inputs are available to the amplifier, the wavemeter output can be superimposed on the power output curve, and frequency or electronic tuning properties can readily be checked.

Operating Precautions

The reflector of a reflex klystron should never be allowed to be positive with respect to the cathode, since this would enable the beam to bombard the reflector, possibly resulting in valve softness. For this reason, the maximum impedance in the reflector supply must be kept below the figure laid down by the manufacturer; in a high-power valve such as the R6010, it is advisable to use a diode clamping circuit to prevent the reflector from going positive.

The lives of reflex klystrons should be comparable with normal valves, and the user should employ the usual precautions to ensure long life. The heater voltage rating should never be exceeded, and may sometimes be slightly reduced to increase life. Maximum ratings should not be exceeded, and cooling the valve by means of an air flow is a definite advantage, even if cooling is not specified by the manufacturer.

Acknowledgments

The author is indebted to the Directors of Electric and Musical Industries Ltd. for permission to publish the article.

References

1. Ginzton, E. L., Harrison, A. E. Reflex-Klystron Oscillators. *Proc. Inst. Radio Engrs. 34*, 97 (1946).
2. Barford, N. C., Bowman-Manifold, M. Elementary Theory of Velocity-Modulation Oscillators. *J. Instn. Elect. Engrs. 94*, Pt. 3, 302 (1947).
3. Worsley, P. K. Electron-Tubes for Microwave Applications. *Brit. Commun. Electronics. 3*, 606 (1956).
4. Pearce, A. F., Kreuchen, K. H., Baron, C., Houlding, N., Ratcliffe, S. Plug-in Reflex Klystrons for Microwaves. *J. Electronics Contr. 3*, 535 (1957).

General References

Klystrons and Microwave Triodes. M.I.T. Radiation Laboratory Series. Vol. 7. (1948).

Beck, A. H. W. Velocity-Modulated Thermionic Tubes. (Cambridge University Press, 1948).

MULTI-CAVITY KLYSTRONS

By V. J. Norris*, B.Sc.

A review is given of the factors determining the gain, efficiency and bandwidth of multi-cavity klystrons, together with results which have been achieved in practice. Recent applications and possible improvements are also briefly discussed.

THOUGH the use of reflex klystrons as local oscillators is the best known application of klystrons, it is perhaps in the use of klystrons as amplifiers that the greatest advances have been made in recent years.

Until comparatively recently the magnetron was used exclusively when a high power source was required at microwave frequencies. The use of amplifier klystrons to provide very high levels of power was first demonstrated at Stanford University[1]. Using a three-cavity klystron a peak power of 20MW was achieved at a frequency of 3 000Mc/s with an efficiency of 35 per cent. This was in excess of the peak power which had been achieved previously by any other means.

The ability of the klystron to provide higher peak and mean powers than the magnetron is due to the different geometry. In the klystron the cathode and beam forming region, the structure and the collector are separate and independent regions. The only function of the collector is to dissipate energy and so it can be of any shape and size depending on the requirement. In the magnetron, on the other hand, the three regions are interdependent with the net result that the achievable power is severely limited. The klystron has a number of other advantages over the magnetron; it is used as an amplifier and hence is much more suitable for coherent systems, its mechanism is better understood, and there is no problem comparable with that of moding in the magnetron. Against these advantages must be set the disadvantage of increased size and weight, greater complexity, increased beam impedance leading to higher potentials and the somewhat reduced value of efficiency generally obtained.

The principle of using more than two cavities has been extended still further and valves have been produced using up to six cavities and giving very high values of gain.

In the following sections the factors which determine the gain, efficiency and bandwidth of amplifier klystrons are enumerated. This is followed by a discussion of the applications made possible by recent advances.

Gain in Multi-Cavity Klystrons

In the early stage of a multi-cavity klystron the space charge forces are high in relation to the bunching forces. The modulus of the r.f. current, $|i_{r.f.}|$ due to any gap voltage then varies sinusoidally down the drift tube and may be calculated from the space charge wave theory of Hahn[2] and Ramo[3] as

$$|i_{r.f.}| = \frac{I_o X \sin hl}{hl} \quad \ldots\ldots\ldots\ldots\ldots (1)$$

where h is the modified debunching wave number, X is the bunching parameter, l is the drift length and I_o is the beam current.

It can then be shown that the gain of an unloaded two-cavity klystron stage is given by

$$G = \frac{2{\cdot}8 \times 10^{-11} \beta^4 R_T^2 K^2 f^2 \sin^2 hl}{h^2} \quad \ldots\ldots\ldots\ldots (2)$$

where R_T is the cavity impedance due to both cavity losses and beam loading, β is the beam coupling factor, K is the beam perveance and f is the frequency.

Equation (2) shows that there is an optimum spacing for maximum gain per stage given by a drift length such that $hl = \pi/2$. The maximum gain per stage is then given by

$$M = \frac{2{\cdot}8 \times 10^{-11} \beta^4 R_T^2 K^2 f^2}{h^2} \quad \ldots\ldots\ldots\ldots\ldots (3)$$

From equations (2) and (3) the synchronous, narrow-band gain of a multi-cavity klystron is readily determined in terms of G and the advantage of using extra unloaded cavities to produce high gains becomes apparent. For a two cavity valve the gain is $G/4$. The factor of $1/4$ is due to the necessity to load the output cavity in order to extract power. A two stage valve containing three cavities will have a gain of $1/4\,G^2$. Thus by adding only one extra cavity the gain when measured in decibels is more than doubled.

The VX8507 shown in Fig. 1 provides an example of the improved performance which may be obtained by adding cavities. An experimental two-cavity valve gave a gain of 13dB. The normal five-cavity version[4] has produced a gain in excess of 70dB, at a frequency of 9 375Mc/s.

In general, the maximum useful gain which can be obtained is determined either by the signal-to-noise ratio at the output or by the onset of oscillation which is usually caused by the return of fast secondary electrons from the output region.

Efficiency

In many applications for which the klystron is particularly suitable, such as transmission of radio signals by means of high power tropospheric scatter, the efficiency of the klystron is of great importance. Basically, the bunching mechanism has a high efficiency, though it is not possible to write down an exact expression for the efficiency, owing to the difficulty of predicting the r.f. current in the beam. To a good approximation, however, the r.f. current in the beam is given by[5]

$$|i_{r.f.}| = 2I_o J_1 \left\{ \frac{X \sin (hl)}{hl} \right\} \quad \ldots\ldots\ldots\ldots (4)$$

* *Mullard Research Laboratories*

which gives a maximum bunching efficiency of 58 per cent when $X \sin(hl) = 1{\cdot}84$.

It is possible to increase the bunching efficiency still further by bunching with more than one cavity. For example, in a three-cavity klystron, by tuning the centre cavity to a higher frequency than the first cavity, the two bunching voltages may be so adjusted that they are in phase; the bunching efficiency is then increased to 80 per cent[6].

In practice these values of efficiency are not achieved. At low power levels the r.f. current in the beam is insufficient to raise the output gap voltage above the beam voltage. The optimum load impedance is then equal to the cavity impedance, giving a maximum output circuit efficiency of only 50 per cent, half the available power being dissipated in the output cavity. At high power levels the

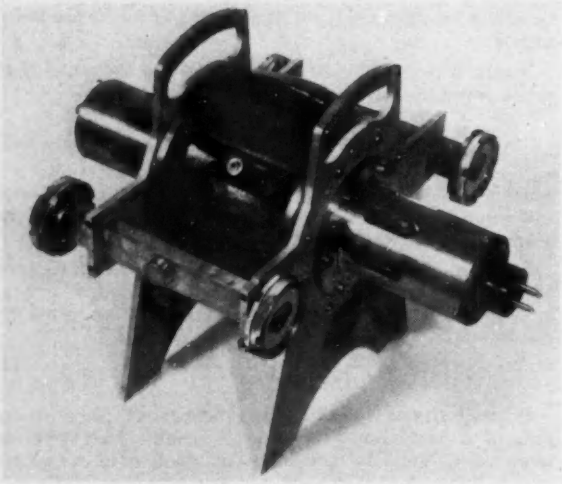

Fig. 1. A high-gain X-band multi-cavity klystron amplifier (Mullard development type VX8507)

circuit efficiency approaches unity as the output load is increased in order maintain the gap voltage at about the beam voltage. However, due to space charge debunching and other effects, these figures are not achieved even at the highest power levels and the klystron, as at present developed, has a somewhat lower efficiency than the magnetron. Values of up to 50 per cent are quoted by manufacturers for some high power tubes used for scatter propagation.

Bandwidth

Although the amplifier klystron is inherently a narrow band device compared with the travelling-wave tube, very useful bandwidths may be obtained by suitably stagger-tuning the cavities in a multi-cavity valve. The bandwidth is adequate for many applications, such as the propagation of television signals or telephony. There are occasions, however, when the maximum attainable bandwidth is required. If all the cavities are assumed to have the same value of unloaded Q, Q_o, and are tuned to the same frequency, f_o, the bandwidth to half power points is given by

$$B = Cf_o/Q_o \quad \ldots\ldots\ldots\ldots\ldots\ldots \quad (5)$$

C is a constant determined by the number of cavities. (For five cavities $C = 0{\cdot}46$). This synchronous bandwidth will be many times be many times less than that which can be achieved by stagger-tuning the cavities, since in the synchronous case the overall bandwidth is determined mainly by the unloaded cavities. On stagger-tuning, providing that enough cavities are used, the achievable bandwidth is determined by the heavily loaded output cavity. The product of the efficiency, η and the bandwidth B is then given by

$$F = \eta B = k^2\beta^2 (I_o/V_o)(R/Q) \quad \ldots\ldots\ldots \quad (6)$$

where k is the ratio of $|i_{r.f.}|$ to I_o.

In general the load is adjusted to give maximum efficiency and the bandwidth is then determined by the parameter $\beta^2(I_o/V_o)(R/Q)$. Both the value of R/Q, for the optimum shape of output cavity, and the value of β, the coupling factor, increase with decreasing beam and cavity nose

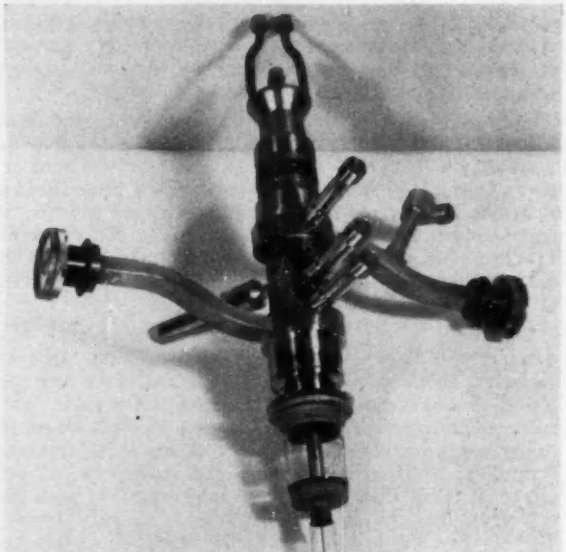

Fig. 2. A high-power X-band multi-cavity klystron amplifier (Mullard development type VX8514)

diameter. Since the beam diameter can be reduced and the beam conductance, I_o/V_o, increased only if the focusing magnetic field is increased, the maximum value of the parameter $\beta^2(I_o/V_o)(R/Q)$ is determined mainly by the magnetic field. The percentage bandwidth available for a given magnetic field increases both with power level and with the wavelength. The VX8514 shown in Fig. 2 is an example of a six-cavity klystron designed to give a peak power output of 0·25MW at X-band. In order to achieve a bandwidth of 1 per cent at this frequency a field of 2 000 gauss is required. The permanent magnet for this valve weighs over 200 lb, but there are promising methods by which the overall weight and size of the permanent magnet in such a valve may be reduced. Among these are the possibilities of using new permanent magnet arrangements or using lightweight aluminium foil coils.

Broadband Tuning

The previous section gave an account of the limitations imposed by the output cavity on the bandwidth of a multi-cavity klystron operated under conditions of high efficiency.

There still remains the problem of determining the resonant frequency distribution of the cavities which is required to produce this bandwidth.

If the frequencies of the cavities are not offset too far from the synchronous condition and if the gain per stage is high enough, then each stage may be considered independent of the other stages and the behaviour is then analogous to that of a conventional amplifier. If the cavity Q's can be adjusted, the tuning and loading of the cavities may be carried out by establishing methods such as Butterworth's and Chebichev's method for i.f. amplifiers. It is then possible to discuss the gain bandwidth product for a given distribution. However, in practice, the loading of the cavities is not adjustable, and the stages are not independent. The major inaccuracy involved in considering the behaviour of a conventional i.f. amplifier analogue is caused by the fact that in a multi-cavity klystron the driving current at any cavity is made up of the vector sum of current produced by the voltages on all previous cavities and not the voltage on the previous cavity alone.

As the amount of broad-banding increases, the importance of the contributions to the total current by the earlier stages increases and the simple approach outlined above must be modified. To a close approximation it can be shown that the overall effect on the frequency response is to add two absorption resonances to the conventional gain-frequency curve[7]. The effect of these unwanted resonances can be minimized by placing the cavities a quarter plasma wavelength apart, the voltage at any gap will then produce no r.f. current two cavities further on. Also, by suitably stagger tuning the cavities it is possible to counteract the resonances to some extent.

The net result of all this is that broad-banding klystrons is a somewhat empirical procedure. The various analyses enable one to predict the bandwidth which can be achieved and how many cavities are required to do this. In practice, providing a suitable swept source for driving the valve is available, the output versus frequency curve may be viewed on an oscilloscope and broad-banding the valve is then neither a lengthy nor a difficult procedure.

Applications

Tropospheric Scatter

In recent years it has been found that the distance over which useful signals can be propagated is not limited by line of sight[8]. Using tropospheric scatter, signals can be transmitted over a wide frequency range up to at least 10 000Mc/s. The attenuation increases rapidly with distance but is relatively independent of frequency. Despite the existence of multi-path transmission leading to fast fading, useful bandwidths of a few megacycles per second may be obtained, provided that narrow beam aerials are used. This fact makes possible a number of applications, particularly in the field of point to point communication over distances of several hundreds of miles. In fact, the first direct commercial telephone link by tropospheric scatter over a distance of 380km has recently been announced[9].

Klystron amplifiers are particularly suitable as transmitters for this application in which as much power as possible is required. Since, by using enough cavities, the gain of the amplifier klystron can be made very large, the required power could be obtained with a reflex klystron providing the driving power. The multi-cavity klystron will also give the required bandwidth for this application. A number of valves have been made, and are available, giving 10 or 20kW of c.w. power with gains up to 50dB, at frequencies from a few hundred megacycles up to several thousand megacycles per second.

Such tubes are also used for broadcasting high power u.h.f. television signals.

Stable Sources at Microwave Frequencies

Another application of multi-cavity klystrons arises when a very stable source at microwave frequencies is required. This requirement arises in many radar and other applications. The best known method of meeting this requirement is that of multiplying the frequency from a crystal-controlled oscillator using conventional valve circuits and following this by a frequency-multiplier klystron. This system is bulky and the stability of the output is reduced due to instabilities introduced in the conventional frequency multiplication stages. By using an amplifier klystron having very high gain a much simpler system is possible. By driving a VX8507 with the 31st harmonic from a silicon crystal driven at 300Mc/s up to 1W of crystal-controlled power may be obtained at 9 300Mc/s.

Improvements

Though the klystron is established as a practical device there are still a number of desirable improvements. Perhaps the biggest disadvantage of the klystron is its high beam impedance, which means that at a given power level the beam voltage is high and that in a pulsed application there is a modulation problem. A great deal of work is going on to develop electron guns giving a higher value of current at a given beam voltage. Where the mean power is high, the modulating power required may be reduced by isolating the anode from the body and collector. The current intercepted by the anode is small and the modulation power is reduced. In some cases where the mean power is low it is possible to use a grid for modulating purposes. The grid is normally run negative and the valve is switched on by applying a positive pulse to the grid.

For some applications the bandwidth of the klystron is too low. It is possible to increase the bandwidth, which is limited by the output circuit, by using coupled cavities as the output circuit and this approach may give an appreciable increase in bandwidth.

Acknowledgments

The author wishes to thank C.V.D., Admiralty, the Directors of Mullard Ltd, and the director of Mullard Research Laboratories for permission to publish this article.

REFERENCES

1. Chodorow, M., *et al.* Design and Performance of a High Power Pulsed Klystron. *Proc. Inst. Radio Engrs. 41*, 1584 (1953).
2. Hahn, W. C. Small Signal Theory of Velocity Modulated Electron Beams. *Gen. Elect. Rev. 42*, 258 (1939).
3. Ramo, S. Space Charge and Field Waves in an Electron Beam. *Phys. Rev. 56*, 276 (1939).
4. Chalk, G. O., Manley, B. W., Norris, V. J. A Five-cavity X-band Klystron Amplifier. *Electronics 2*, 50 (1956).
5. Chodorow, M., Ginzton, E. C., Nalos, E. J. Debunching of Electron Beams Constrained by Strong Magnetic Fields. *Proc. Inst. Radio Engrs. 41*, 999 (1953).
6. Warnecke, R., Guenard, P. Tubes a Modulation de Vitesse. p. 120 (Paris: Gauthier Villars, 1951).
7. Curnow, H. J. A Study of the Frequency Response of a Six-cavity Klystron. *S.E.R.L. Tech. J. 46*, 14 (1956).
8. *Proc. Inst. Radio Engrs.* Scatter Propagation Issue *13*, 1175 (1955).
9. *L'Onde Electrique*, No. 367, 907 (1947).

Coaxial-line Velocity Modulated Oscillator Valves

By D. E. Lambert*

The principle of operation of the coaxial-line velocity-modulated oscillator valve is described together with a discussion of the advantages and limitations when compared with other v.m. oscillators. A description is given of the use of this type of valve in various equipments operating in the 800 to 5 000Mc/s frequency range. A list of valves which are in current manufacture is included giving operating details and performance.

THE type of velocity-modulation oscillator to be described uses a coaxial-line resonator as part of the velocity modulation system to generate microwave power. Work on this type of valve was started in the laboratories of Standard Telephones and Cables Limited in 1938 and active development has continued ever since. In 1939 sealed-off non-tunable valves achieved an output of a hundred milliwatts or so at frequencies in the region of 2 500Mc/s. During the war years this type of valve was used in signal generators, wide-band search receivers, some experimental radar equipment and in a radio-link for military use.

Since 1946, it has been actively developed to fulfil a number of roles, mainly in the Company's microwave radio link systems in the 3 600 to 4 200Mc/s and 4 400 to 5 000Mc/s frequency bands.

Principles of Operation

The essential requirements for a velocity modulated oscillator are one or more gaps in a resonator system for interaction between electron beam and r.f. fields and adequate coupling between these gaps, if more than one is used, to sustain oscillations. In the coaxial line resonator used for this type of valve, two gaps are used one on either side of the centre conductor, between inner and outer conductors, see Fig. 1, and the electron beam is projected across a diameter perpendicular to the resonator axis. The electric fields in the two gaps are equal in magnitude but opposite in phase, and as they form part of the same resonant circuit, the coupling between them is unity. The valve operates in the single-transit mode, the electron beam traversing the resonator once. Velocity-modulation occurs in the first gap, electron bunches forming in the drift-tube separating the gaps, i.e., in the inner conductor, and energy is abstracted from the bunched beam in the second gap. The beam is collected on an anode external to the resonator. The valve resonator is coupled to another circuit, external to the valve envelope, which serves as a means of tuning the frequency of the oscillator and from which the generated r.f. power can be coupled.

There are two methods of changing the oscillatory frequency of a v.m. oscillator, mechanically and electrically. For mechanical tuning, the physical constants of the circuit coupled to the valve resonator are changed so as to affect the resonant frequency, and the coupling between valve resonator and tuning circuit is dependent on the amount of tuning required. The mechanical-tuning range of this type of valve can be made as much as 2·5 : 1. For electronic-tuning, the susceptance of the bunched electron beam is changed by variation of the beam velocity, and this varies the resonant frequency of the valve resonator. The electronic-tuning range is limited and is usually around $\pm\frac{1}{4}$ per cent.

* *Standard Telephones & Cables Ltd.*

Method of Construction

The method of construction employed is similar on the valve types to be described and they only differ in detail. The three types of resonator assembly employed are illustrated in Fig. 2. In these drawings, the electron gun and anode assemblies have been omitted for clarity.

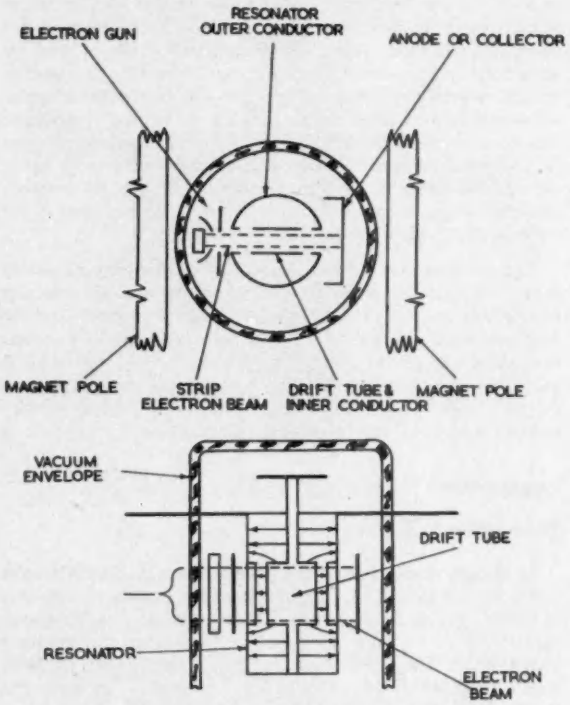

Fig. 1. Cross-section of coaxial-line v.m. oscillator

In Figs. 2(a) and 2(b) the centre-conductor supporting the drift tube is mounted on a short-circuit so positioned that there is a maximum of electric field in the interaction gap region. The two types illustrated in Fig. 2 differ in the manner in which the valve resonator is coupled to the external tuning-circuit. For wide mechanical-tuning range, or where electronic tuning is of secondary importance, the centre-conductor is extended beyond the outer conductor which is connected to a disk-seal and forms a means of coupling to the external circuit, see Fig. 2(b). The form of tuning circuit employed depends on the particular application, but the most common are the coaxial-line, shown in Fig. 3, and waveguide, shown in Fig. 4.

When as much electronic-tuning range as possible is

required it is essential that the valve resonator operates on the fundamental mode, in this case $\lambda/4$, and the output circuit is capacitively coupled to the drift-tube, see Fig. 2(a). The coupling is adjusted so as to obtain adequate mechanical-tuning range, and is usually much less than that obtained with the construction shown in Fig. 2(b).

For valves to operate at frequencies below about 1 500Mc/s, it is possible to support the drift-tube on an insulator, as shown in Fig. 2(c). The drift-tube is then at a voltage

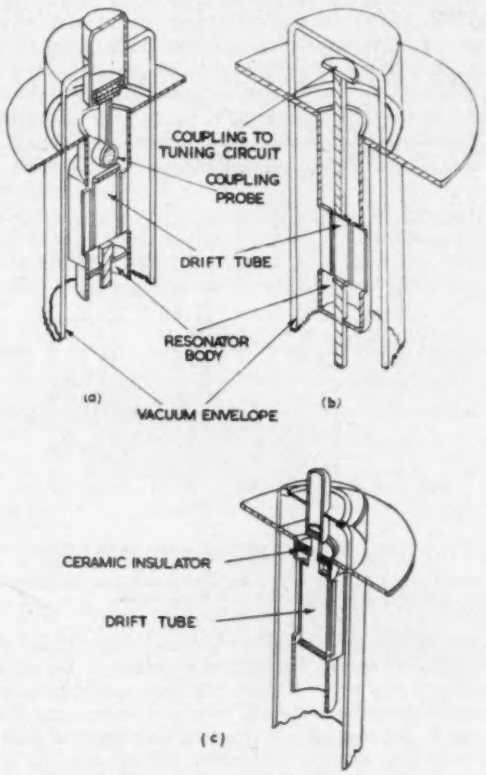

Fig. 2. Constructional details of coaxial-line v.m. oscillator

maximum at all frequencies of operation, the coaxial-tuning circuit being connected between resonator disk and top cap, and the valve operating in the $\lambda/4$ or $3\lambda/4$ circuit mode.

To obtain good frequency stability the outer conductor of the resonator is usually made of copper which gives a good thermal path between drift-tube and resonator disk which is connected to the external circuit to provide a good heat sink.

To take full advantage of the r.f. field in the coaxial line a strip electron beam is used, and to maintain the beam shape during passage through the resonator a uniform magnetic field is used provided by a small permanent magnet. Adjustment is not made to the position of this magnet when replacing valves in equipment, as once having been set correctly when the equipment is made, the three holes that can be seen punched in the resonator disk locate on pins on the magnet plate.

Typical Performance Characteristics

The coaxial-line v.m. oscillator is characterized by low operating voltage, comparatively high efficiency and high stability. The low voltage and high efficiency are a direct consequence of the use of the single-transit mode of operation and a magnetically focused strip electron beam. To illustrate the kind of performance characteristics obtained, Figs. 5 and 6 show power output and operating voltage versus frequency for a number of valve types designed to operate in the 700 to 5 000Mc/s frequency range.

Fig. 5(a) refers to a group of valves designed to cover the 4 400 to 5 000Mc/s band between them with around $\pm$10Mc/s electronic tuning range. The operating cathode current in each case is 50mA, and the valves operate in a tuning circuit as shown in Fig. 4.

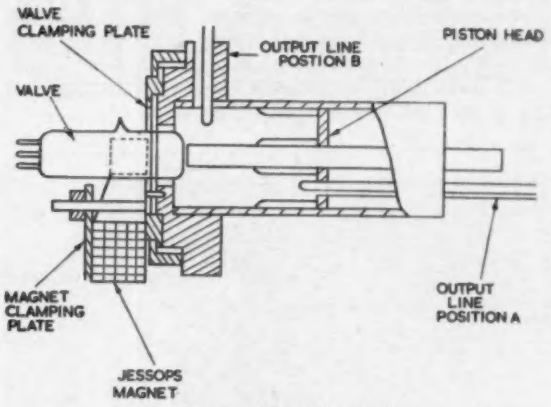

Fig. 3. Coaxial-line tuning circuit

Fig. 6(a) shows the performance of a valve designed to have a wide mechanical tuning range, and operates in a coaxial line tuning circuit as shown in Fig. 3. The performance shown is for a d.c. input of 15W, except at the lower frequencies where the input is limited by the maximum permissible cathode current of 65mA.

Fig. 6(b) shows the performance of a valve operating in the 700 to 1100Mc/s frequency band. The operating cathode current was 80mA, and it is to be noted that the overall efficiency is in excess of 10 per cent over most of the band. The valve operates with a coaxial-line tuning circuit and the electronic-tuning range is about $\pm 2\frac{1}{2}$Mc/s between frequencies of 800 and 1 000Mc/s.

Fig. 5(b) shows the performance of the latest valve to be designed for use in the 3 600 to 4 200Mc/s communications band, and it can be seen that this valve delivers a power output in excess of 1W. The tuning circuit is of the waveguide variety with coaxial-line output, and is illustrated in

Fig. 4. Waveguide tuning circuit

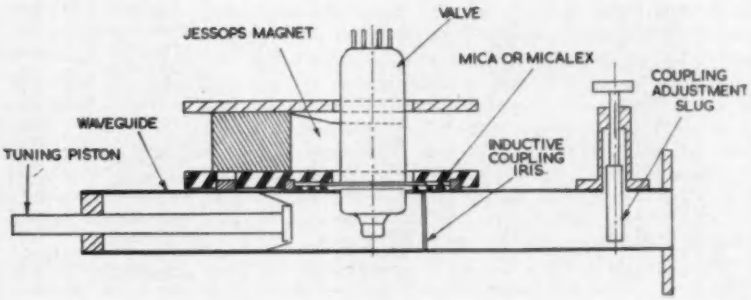

Fig. 8. All of these valves are conduction and convection cooled and do not require any air-blast cooling.

The characteristics shown are for typical operating conditions but the cathode current, and hence the performance, can be varied by means of the voltage applied to the screen electrode of the electron gun. This current control has the added advantage that the r.f. performance of the valve can be maintained almost constant during the life of the valve by adjusting the screen voltage so as to keep the cathode current constant.

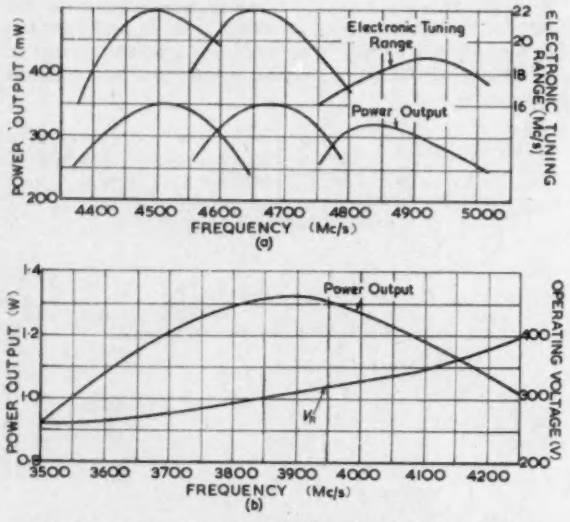

Fig. 5. (a) Power output and electronic tuning range for valves type V245C/1K and V249C/1K

(b) Power output and operating voltage versus frequency for V238A/1K valve in waveguide tuning circuit

A list of valves of this type in current production is given in Table 1.

Comparison with other Types of V.M. Oscillator

It is of interest to compare the characteristics and performance of the coaxial-line oscillator with other v.m. oscillators. In doing this, it is not intended to show that this type of valve is an answer to all the problems of the microwave system designer, but to show that it is complementary to other types and to show the particular fields of application to which it is best suited.

The other type of valve commonly used in microwave systems is the reflex klystron. This valve uses an electrostatically focused electron beam which leads to limitations in power input, especially at low voltages. In valves operating at comparable voltages to the coaxial line types described, the interaction gaps are usually gridded to keep the coupling

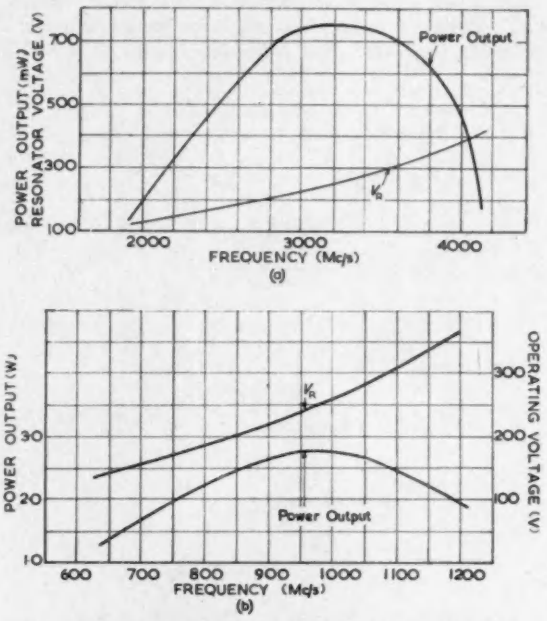

Fig. 6. (a) Power output and operating voltage versus frequency for V233A/1K (CV2190) valve in coaxial-line tuning circuit

(b) Power output and operating voltage versus frequency for V190C/1M valve in coaxial-line tuning circuit

between electron beam and r.f. field sufficiently high. This, combined with the electron-optical problems of the reflector in returning the beam through the gap results in a lower fraction of the cathode current being used to generate power. The use of the magnetically focused strip electron beam in the coaxial-line tube permits higher current densities to be used and this combined with the single-transit mode of operation leads to higher efficiency. The absence of grids in the coaxial-line structure makes it less sensitive to dimensional changes and leads to a higher frequency stability.

The mechanical-tuning ranges of the two types of valve are

TABLE 1

Velocity Modulated Oscillators

COMMERCIAL CODE	CV NUMBER	BASE	HEATER VOLTAGE (V)	FREQUENCY RANGE (Mc/s)	MINIMUM POWER OUTPUT (W)	RESONATOR VOLTAGE RANGE (V)	CATHODE CURRENT (mA)	TYPICAL ELECTRONIC TUNING RANGE (Mc/s)
V190C/1M	—	B8G	6·3	800-1000	2.0	180-270	80	±2·0
V230A/1K	234	B7G	6·3	1700-3700	0·3	100-300	50-65	±1·0
V233A/1K	2190	B7G	6·3	2700-4200	0·3	190-380	50-65	±1·0
V235A/1K	2221	B7G	6·3	2700-4000	0·5	190-350	50-65	±1·0
V237C/1K	—	B7G	6·3	3560-3820	0·35	225-285	45	±4·0
V238A/1K	—	B7G	6·3	3550-4250	0·9	250-400	50	—
V239C/1K	—	B7G	6·3	3780-4040	0·35	225-285	45	±7·0
V240C/1K	—	B7G	6·3	4000-4100	0·35	240-280	45	±9·0
V240C/2K	2189	B7G	6·3	3950-4050	0.35	240-280	45	±9·0
V241C/1K	—	B7G	6·3	4000-4240	0.35	225-285	45	±7·0
V245C/1K	—	B7G	6·3	4400-4630	0·2	230-265	50	±10·0
V246A/1K	228	B7G	6·3	4400-4850	0·45	200-250	65	±6·0
V246A/1K	485	B7G	6·3	4560-4860	0·2	200-230	40	±4·0
V247C/1K	—	B7G	6·3	4570-4750	0·2	230-265	50	±10·0
V249C/1K	—	B7G	6·3	4760-5000	0·2	240-290	50	±9·0

similar. Although most reflex klystrons have built-in tuning mechanisms for convenience, external cavity valves are made with tuning ranges in excess of 2 : 1. In frequency ranges where the two types of valve can be compared from this point of view, the coaxial line valve usually operates with a shorter transit-time in the bunching region, which reduces the possibility of mode interference.

There is a lot to be said for the use of external tuning circuits as they enable the circuit to be tailored to a specific application and reduce the cost of the valve.

The method of cooling the valve is of importance in some applications and if powers in excess of ¼W to ½W are required, most reflex-klystrons will require some air blast cooling. All the coaxial line valves described in this article need no air-blast cooling for operations up to their maximum ratings.

The major limitations to the coaxial line type of valve are the limited electronic-tuning range possible and the frequency range in which valves can be made to operate with an attractive performance.

The frequency limitation arises because of the increasing losses in the coaxial line resonator as the frequency is raised which, coupled with the reduced physical length results in the performance falling rapidly above about 6 000Mc/s. The

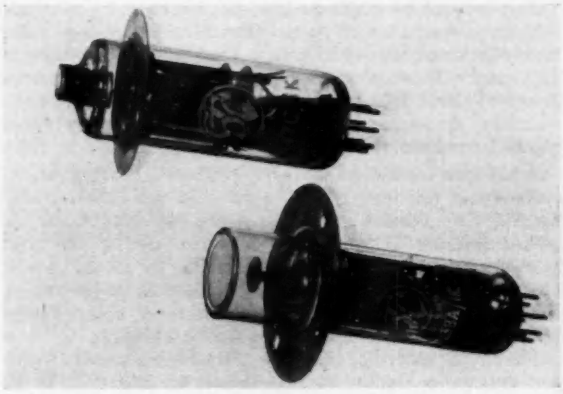

Fig. 7. V247C/1K and V238A/1K coaxial-line oscillator valves

low frequency limit is set by physical size but the V190C/1M has been operated successfully at 600Mc/s. The reflex klystron has a similar low frequency limit but the high frequency limit is nearer 60 000Mc/s.

The electronic tuning range of a v.m. valve is a function of both bunched electron beam and valve resonator characteristics. In the case of the reflex klystron, the amount of bunching that takes place is a function of both transit-time and reflecting field shape, enabling the bunching characteristic to be so adjusted that wide electronic tuning-ranges are obtained. The valve resonator should be designed so that the interaction gap capacitance is a minimum and the coaxial line resonator is also inferior to the type of resonator commonly used for the reflex-klystron, in this respect. Although the higher current density usable at a low beam voltage for the coaxial line valve offsets these effects to some extent, the net result is that much wider electronic-tuning ranges, ±1 per cent, can be obtained with the reflex klystron.

To summarize, for applications in the frequency range 600 to 6 000Mc/s where low voltage operation, power output in excess of ¼W, moderate electronic tuning range and good frequency stability are of importance the coaxial line valve will have some advantage.

To illustrate some of these points, a number of successful applications of the coaxial line type of valve, mainly in the radio-link field during the past ten years, will be described.

Mobile F.M. Radio Links

This equipment[1] is intended for the transmission of television or multi-channel telephony signals for distances up to 30 or 40 miles and has been in use by the BBC since 1948. The equipment operates in the frequency range 4 400 to 5 000Mc/s and three valves[2] are used in the same waveguide tuning circuit to cover this range. One of these, the V247C/1K, is shown in Fig. 7, and a view of the valve in the equipment in Fig. 8.

The valve is used both as the transmitter and local oscillator in the receiver. The modulation linearity is adequate for television or up to 60 telephone channels.

This particular application is of interest as it illustrates the good frequency stability of this type of valve. No automatic frequency control is used on either transmitter or receiver, and after the initial warming-up period will operate for long periods without adjustment.

The average life of the valves used is in the 3 000 to 4 000 hour region.

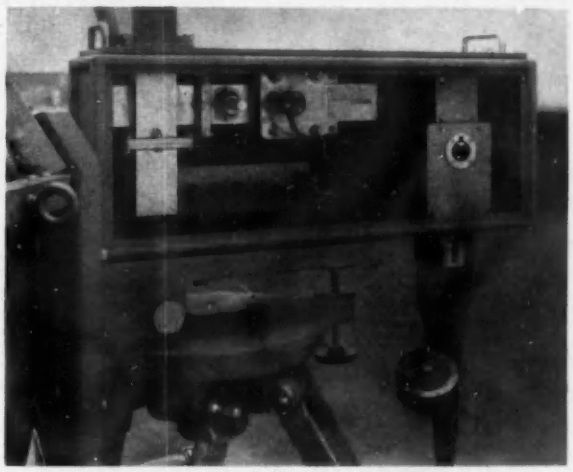

Fig. 8. View of V247C/1K valve in receiver of portable radio-link

Manchester—Kirk-O'-Shotts Television Link

This was the first of a number of similar equipments[3, 4] for permanent relay of television or telephony signals and has been in use since 1952. Other equipments of a similar nature are in operation in the United Kingdom, Japan, Canada, Brazil, Austria and Spain.

The coaxial line valve is used as the local oscillator in all the receivers at both terminal and repeater stations. In the type of repeater used in these systems, in which most of the amplification takes place at frequencies in the region of 70Mc/s, oscillators are required to drive the mixers which convert from the incoming microwave frequency to i.f. and back again after amplification, to the outgoing microwave frequency. A crystal mixer is used for the i.f. to microwave frequency conversion and has to produce enough power to drive the travelling-wave output amplifier. As this type of mixer has appreciable conversion loss, 12 to 15dB, about ½W of microwave power is required from the local oscillator. This is supplied by a coaxial line oscillator V240C/2K, and in later equipment V237C/1K, V239C/1K and V241C/1K forming a series to cover the complete 3 600 to 4 200Mc/s communications band. These all operate at 300V with a

cathode current of 45mA and the average life in service is around 6 000 hours.

New Wide-Band Radio Link

Field experience with the equipment described above showed that it would be advantageous to eliminate complex a.f.c. circuit arrangements in future equipments, thus simplifying the maintenance and reducing the size of the equipment.

In the latest system[4], a V238A/1K valve (see Fig. 5) is used to drive both incoming and outgoing mixers and

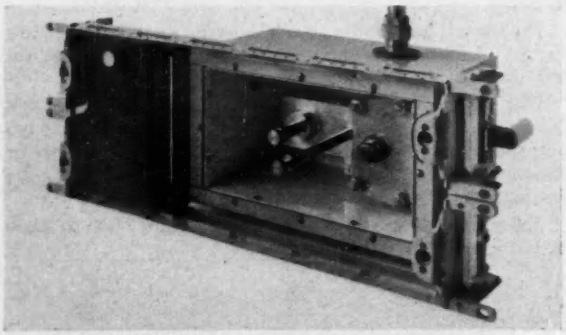

Fig. 9. View of V238A/1K in waveguide tuning circuit with lid of oven removed

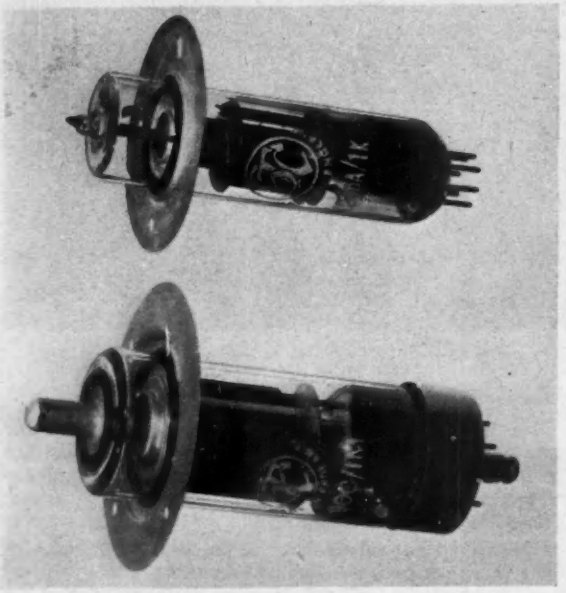

Fig. 10. V190C/1M and CV485 coaxial-line oscillator valves

operates without automatic frequency control. To achieve the high frequency stability required for these systems, the valve and tuning circuit is operated in a temperature controlled oven and fed by carefully regulated power supplies. By this means, a long-term frequency stability of better than ±100kc/s in the frequency range 3 550 to 4 250Mc/s can be obtained.

To avoid distortion due to frequency pulling of the valve by the high-level mixer some buffering must be introduced between them, the amount being dependent on the pulling-figure* of the valves, which should be a minimum. The V238A/1K has a pulling figure of about 1¼Mc/s but the use of ferrite isolators has now reduced the importance of this characteristic. The average life is similar to the V240C/2K valve used previously.

A view of the valve in the equipment with the lid of the oven removed is shown in Fig. 9. Equipments of this type are about to be installed in the United Kingdom, Switzerland, New Zealand, Newfoundland, Australia, South Africa and Malaya.

900Mc/s F.M. Radio-Links

The V190C/1M valve, see Figs. 6 and 10, has been used in a multi-channel f.m. link designed by S.T. & C. Pty, Australia. The valve is used both as a local-oscillator and transmitter valve to drive the 2C39A output amplifier.

This valve has also been used in experimental f.m. equipment at 600Mc/s for the transmission of television where the low voltage, 130V, and 1W output were of importance. The tuning circuit is reasonably small at this frequency, 2in long, as the valve plus circuit operate in the $\lambda/4$ mode.

Lightweight Communication Set

The CV485 valve, which is a later version of the V246A/1K valve, see Fig. 10, has been used in the British Army portable multi-channel f.m. telephony link manufactured by Marconi Wireless Telegraph Company. The valve is used as both transmitter and local oscillator. The operating voltage is 230V and with a cathode current of 40mA has an output power of about 200mW.

Signal Generators

It has been mentioned that wide mechanical tuning ranges are possible with this type of valve and this characteristic has found application in the design of signal generators. A typical example is the CV2221 which is used in the type MW40/5 S-band oscillator manufactured by Decca Radar Ltd. The particular point here is that the high power output enables the generator output to be extended to about 10mW while still maintaining linear attenuator calibration.

The circuit used is of the coaxial-line variety and the valve performance is similar to that shown for the CV2190 in Fig. 6.

Conclusions

The construction, design and performance of a range of v.m. oscillators utilizing a coaxial line resonator has been described. It has been shown that for some applications, this type of valve will have some advantage over the reflex-klystron and examples of its use in microwave systems has been given.

As the trend in new microwave radio link systems is to higher frequencies, around 7 000 and 11 000Mc/s, it is unlikely that much further development of this type of valve will take place.

Acknowledgments

The author wishes to thank Standard Telephones and Cables Limited for permission to publish this article.

REFERENCES

1. Dawson, G. Portable equipment for a microwave television link. *Proc. Instn. Elect. Engrs. 99*, Pt. 3A, 231 (1952).
2. Lambert, D. E. A coaxial-line velocity-modulated oscillator for use in f.m. radio-links. *Proc. Instn. Elect. Engrs. 99*, Pt. 3A, 421 (1952).
3. Dawson, G., Hall, L. L., Hodgson, K. G., Meers, R. A., Merriman, J. H. H. The Manchester-Kirk o'Shotts television radio-relay system. *Proc. Instn. Elect. Engrs. 101*, Pt. 1, 93 (1954).
4. Dawson, G. S.H.F. Radio Links using Travelling-wave Output Amplifiers. *Electronic Engng. 30*, 276 (1958).

* *The pulling figure is defined as the maximum change in oscillation frequency that occurs when the phase of a* v.s.w.r. *of 1·5, in the output line, is changed through 180°.*

Backward Wave Oscillators

By A. G. Stainsby*, B.Sc., A.Inst.P.

The backward wave oscillator has developed rapidly since its invention six years ago. It combines rapid electronic tuning with a frequency range sometimes in excess of an octave. There are two distinct types of oscillator, the O type which is mainly suited to low power operation as a local oscillator or test source and the M type which is capable of delivering high powers with good efficiency and is thus suited to use as a transmitter. The characteristics and mechanism of operation of these two types are explained and typical examples are described.

THE feature which particularly distinguishes a microwave valve from those used at lower frequencies is the inclusion of the circuit or at least a major part of it within the evacuated envelope. Thus if the valve is to be tuned, this must be done by modifying what remains of the circuit external to the valve or by modifying the circuit inside the valve by a mechanism operating through the wall. For example a magnetron may be tuned by moving metal pins in the resonant cavities using a mechanism operating through metal bellows or by coupling a reactance to the output waveguide external to the valve. Reflex klystrons are tuned by plungers in the part of the resonant cavity external to the valve or by means of a piece of ferrite material inside, or they can be tuned over a few per cent electronically, i.e. by altering the reactance of the electron beam. All these methods are, however, limited in range or the rate at which tuning can be achieved. It was the invention of the backward wave oscillator which at once offered rapid tuning over a wide frequency range.

The backward wave oscillator principle was discovered independently by B. Epsztein of the Compagnie Générale de T.S.F. in Paris and R. Kompfner of Bell Telephone Laboratories. Epsztein showed that a condition for oscillation should occur under certain conditions of a beam interacting with a circuit, and later found such oscillations, whose frequency varied with beam velocity, in a travelling-wave amplifier[1,2] of the M type. To the resulting oscillator was given the name 'Carcinotron'. Kompfner, on the other hand, had recognized the possibility of such oscillations during early work on travelling-wave tubes and found oscillations which tuned between 6 and 7·5mm wavelengths in a travelling-wave tube designed by Millman[3,4].

The backward wave oscillator immediately offered a microwave device capable of being tuned rapidly over a frequency range of first 50 per cent and soon over more than two octaves[5] and thus opened up new possibilities for systems employing frequency modulation with an exceptionally wide deviation and of measuring equipment for covering bandwidths of an octave in a single display. Transmitting types of oscillator have been developed[6,7], giving powers in the ten centimetre region of 500W. Receiving types are now available to give continuous coverage between 1 000Mc/s to 15 000Mc/s, each tube having an electronic tuning range of 50 per cent to 100 per cent[8,9] and coherent oscillations with an experimental valve[10] have been obtained up to a frequency of 200Mc/s.

Description

What, then, is the characteristic of the oscillator which has made such remarkable progress in so short a time? In the first place it contains no resonant circuits, the circuit consisting of an artificial line which ideally is matched at each end. The basic features of the device, as shown in Fig. 1, are similar to those of a travelling-wave tube. An electron stream passes along the tube parallel to a periodic structure constituting a delay line which is matched at each end either by an external load or an internal termination. The output connexion is at the gun end of the delay line and in this way the tube differs from the travelling-wave tube. Now the electron stream can interact with any wave whose phase velocity is approximately the same as its own and it can be shown that a wave travelling along a periodic structure may be analysed into components having phase velocities in the same and the opposite direction to that in which the energy is propagating.



Fig. 1. The basic structure of the backward wave oscillator

A picture of the interaction may be obtained by considering a wave passing along a periodic structure. Imagine that the gaps between successive bars are small. Then, if the wave propagates forward at the same speed as the electrons, an electron will experience a force of the same magnitude and direction at all gaps, e.g. if it is retarded at the first gap it will be retarded at subsequent gaps so long as synchronism is maintained. In this way there is continuous interaction along a tube and this represents the mode of operation of an amplifier. If, however, an electron travels in the opposite direction to the wave, but this time slower, there is again a possibility of the electron experiencing the same retarding field at consecutive gaps provided that the velocity is correct. For example, in the case illustrated in Fig. 2 if the phase difference per segment is $\pi/2$, i.e. there are 4 segments per wavelength, then for an electron to synchronize with the wave at the gaps it must travel back one segment while the wave travels forward 3 segments. In general the relation is that if the electron velocity v is required to synchronize with a wave whose phase change per segment is ϕ in the forward direction, then, to synchronize in the opposite direction, i.e. with a reverse component of the wave the electron velocity must be reduced to $(v\phi)/(2\pi-\phi)$. It is now seen to be possible for the electron stream to couple to a component of a wave whose energy is travelling in the opposite direction, for

* *Research Laboratories of The General Electric Co. Ltd, Wembley*

example, in Fig. 1 while the electrons are travelling from left to right and causing a build up of energy towards the entry end of the tube, there is thus a mechanism to feed back energy into the beginning of the line which modulates the beam giving rise to oscillations.

There are two conditions for oscillation. Firstly that the beam shall be substantially synchronous with the wave on the circuits and secondly that the total phase shift around the tube shall be such as to reinforce oscillations. Since the tube is many wavelengths long, this second condition need not concern us here since, for a very small change of wavelength, the total phase shift can be changed by a substantial amount. The condition of most interest is thus the

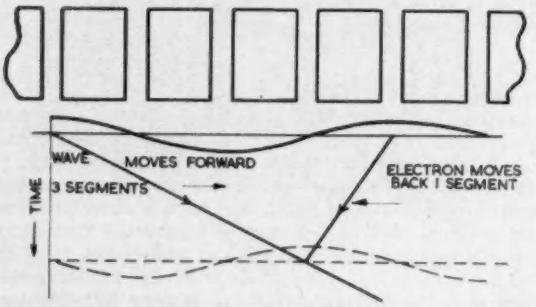

Fig. 2. The wave on the periodic structure analysed into a forward and backward component

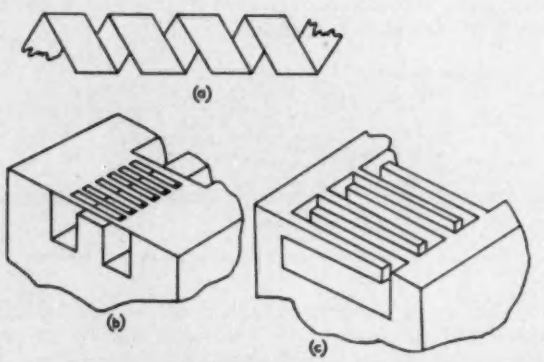

Fig. 3. Slow wave structures
(a) Tape helix
(b) Loaded ladder
(c) Interdigital

synchronizing condition. Since the velocity of the beam may be varied at will by varying the voltage, it will be necessary for the phase velocity of the wave component to alter in order to provide the condition of synchronism and so of oscillation and, as there are no other variables which are free to change, this can only occur if the frequency changes. How, then, does the phase velocity of a wave component depend on frequency? To answer this one must consider the type of slow wave structure which is to be used.

Any periodic structure, for example in Fig. 3 the helix (a) ladder line (b) interdigital line (c) can propagate waves over various bands of frequencies. They can be regarded as filters whose distributed capacitances and inductances combine to provide pass and stop bands as in lower frequency theory. The filters can be described in terms of the phase and frequency diagram in which the frequency (multiplied by 2π × distance between segments) is plotted as a function of the phase change per segment. Examples of the two general types are shown in Fig. 4, they are in fact typical of band-pass filters. Fig. 4(a) shows a high frequency cut-off when $\beta\rho = 0$, or 2π and a low frequency cut-off where $\beta\rho = \pi$ with propagation for intermediate frequencies. Where β is the phase constant representing the change of phase per unit length.

Now for any structure the phase velocity (the velocity to which electrons couple) is given by ω/β and for a frequency corresponding to the point K in the diagram it is given by the slope of the line OA. The group velocity, or the velocity with which energy is propagated along the structure is given by $d\omega/d\beta$ and is shown by the slope of the tangent AT at the point A. From the curve it is seen that these two slopes are opposite and consequently the group velocity is in the opposite direction to the phase velocity. Furthermore it is seen that as the phase velocity

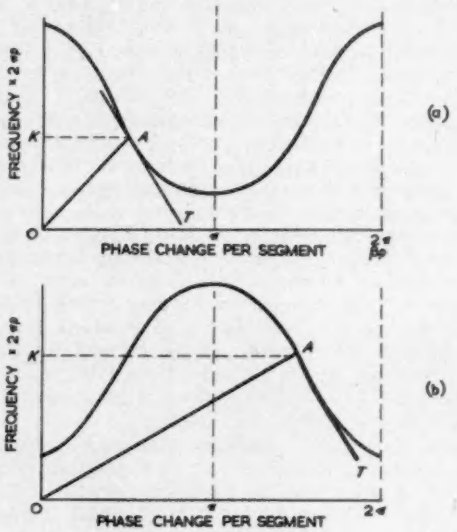

Fig. 4. Dispersion curves
(a) Backward fundamental wave
(b) Forward fundamental wave

is altered (a rotation of the line OA) corresponding to the electron velocity altering, the frequency must alter to maintain synchronism. The interdigital line Fig. 3(c) will give a dispersion curve of this type and since the fundamental component has a phase velocity in the opposite direction to the group velocity this is called a backward wave structure.

If the structure is of the opposite type, as illustrated in Fig. 4(b), i.e. having a low frequency cut-off at 0 and 2π and a high frequency cut-off at π, the phase velocity of the fundamental component has the same direction as the group velocity, since the slope is positive, and this is called a forward wave structure. It may, however, still be used in a backward wave oscillator by utilizing the component wave or space harmonic which gives between π and 2π phase change per segment. Thus one might operate a backward wave oscillator at the point A. This has the advantage that a larger structure may be used for a given wavelength, but the coupling impedance of the wave to the beam is reduced.

If, then, the velocity of an electron beam passing a slow wave structure is known, one can immediately predict to a first order the frequency of oscillation assuming the dispersion curve of the structure is known. The exact

frequency depends to some extend on space charge and also depends on the type of backward wave oscillator which is being considered.

Types of Backward Wave Oscillator

In the discussion so far it has been assumed that a beam was being injected parallel to the periodic structure, but no consideration has been given as to how the electrons were travelling or how the beam was produced. There are, however, two distinct types of beam which are usually described as the O and M types.

The O type (shown in Fig. 5(a)) employs an electron gun in which electrons are accelerated to a given velocity on passing through one or more anodes. The electrons then continue to travel parallel to the periodic structure in a region where no d.c. fields are present. A focusing magnet may be employed, but it is not fundamentally essential to the operation of the tube. In producing oscillations the beam gives up a proportion of its kinetic energy to the r.f. field on the line and power may be extracted from the end nearest to the beam entry. At the opposite end of the line

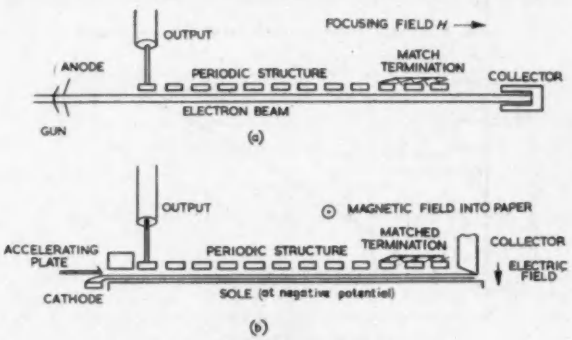

Fig. 5. Backward wave oscillators
(a) O type
(b) M type

there is a matched resistive load which absorbs any power reflected from the output.

In the M type, Fig. 5(b), the magnetic field, as in a magnetron, is at right-angles to the direction of propagation and to an electric field which exists between the line and a negative electrode usually called the sole. The cathode lies parallel to the sole above which is the accelerating plate controlling the beam. The beam is accelerated by the voltage on the plate and is deflected by the magnetic field so that it enters the interaction space between sole and line at a velocity given by the ratio of electric field to magnetic induction E/B. The electron beam now travels parallel to the line and in doing so interacts with the fields of any components of the r.f. wave which are travelling with the same velocity. In this case, however, the beam does not give up its kinetic but its potential energy and gradually approaches the delay line where it is absorbed. These two devices, while operating on the same general principles, are sufficiently different for each to be treated separately.

O Type Oscillator

As stated above an O type tube employs a directly accelerated beam which gives up some of its kinetic energy to the r.f. wave as it passes down the circuit.

The energy is given by the equation $eV = \frac{1}{2}mv^2$. Where v is the velocity of an electron of mass m and charge e, and V is the accelerating voltage. Thus the velocity is proportional to the square root of the voltage. If the phase velocity on the circuit is a linear function of the frequency of the wave, the variation of frequency with voltage will be rapid at low voltages, but changing more slowly at high voltages. Further, unless the current is varied across the frequency band by the use of a grid, the power input will vary considerably across the frequency band. The O type oscillator is thus primarily suited to use as a low power oscillator, for example as a local oscillator in a receiver or low power modulator. A typical example of such a tube is the Mullard VX8509 which covers the frequency range 7·0 to 11·5kMc/s. This is shown in Fig. 6. It consists of an inner tube which slides into the permanent magnet required for focusing. The valve employs an interdigital line which is terminated internally by a resistive attenuator while the other end passes through a fin-line to the waveguide output. The gun produces two flat beams which pass down either side of the interdigital line. The characteristics of frequency and power as a function of line voltage are shown in Fig. 7. It is seen that the frequency increases steadily with increase of the voltage, but the rate of change of frequency per volt falls off at the high

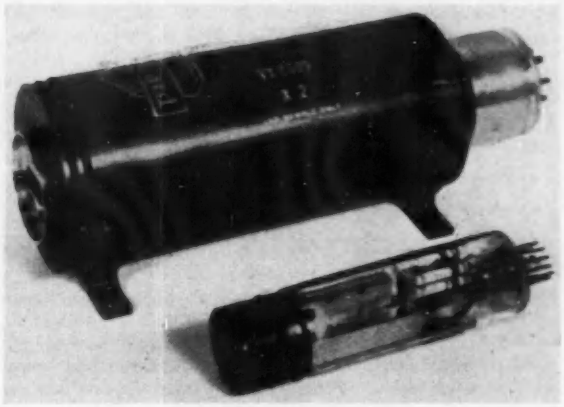

Fig. 6. O type backward wave oscillator VX8509
(Photograph by courtesy of Mullard Research Laboratories)

voltage end. The power output changes from 40mW at low frequencies to nearly 200mW at the high frequency end of the band. This power output can, however, be controlled by varying the collector current with the aid of the grid. Since the waveguide output is isolated from the line the gun may be operated at earth potential which makes modulation of the control grid much easier than if the line were earthed. By this means the power may be held down to a constant level to within about 1dB, depending on the rate of fluctuation of power of the individual sample and the rate of sweeping.

The tape helix Fig. 3(a) has also proved a useful structure for use in O type oscillators. A helix is essentially a forward wave structure but by use of a broad tape the spatial harmonics are accentuated. The amplitude of the backward wave component increases from zero at the centre of the tube to a maximum close to the helix. Thus in the design of such tubes the beam is injected close to the helix and frequently a hollow beam s used. The connexion for the output may be taken to a waveguide or coaxial coupling using techniques similar to those used for travelling wave amplifiers.

Because of their wide tuning range O type backward wave oscillators have been designed to cover all frequencies between 1 000 and 15 000Mc/s using interdigital or tape helix lines and for still higher frequencies the loaded

ladder line has been used. This has the attraction of being easy to construct with great precision, and A Karp[10] has used this type of line to obtain oscillations up to 200kMc/s which represents the highest frequency so far obtained. In his construction he overwound a molybdenum former with gold plated molybdenum tape to produce a line of the type shown in Fig. 3(b). By furnacing, the whole could be brazed together to yield an accurate and robust structure. This gave a forward structure and oscillations were obtained using a reverse spatial harmonic.

The facility for rapid electronic tuning carries with it the disadvantage that it is difficult to use the tube as a stable oscillator. The variation of frequency in the 10 000Mc/s region may be of the order of 4Mc/s/V. Thus if a voltage stable to one part (r.m.s.) in 10^6 is available, the residual frequency modulation due to this power supply is still 1kc/s. Because of this feature, there does seem to be a need for an oscillator with rather smaller frequency coverage at X-band where it will become increasingly necessary for ships' radars to change their frequency to avoid interference. Here a compact tube using some circuit such as was used by Karp may offer a local oscillator covering a bandwidth of, say, 10 per cent with consequently less voltage sensitivity than that of the wide small range tubes,

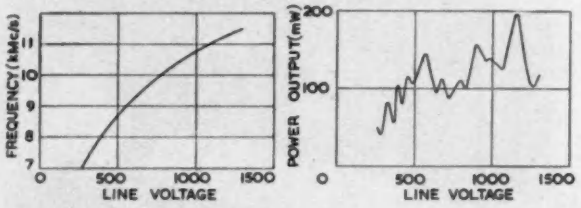

Fig. 7. Characteristics of frequency and power as a function of line voltage for typical VX8509

the voltage sensitivity being the main objection to the use of backward wave oscillators as local oscillators in receivers.

The tuning curve of frequency/voltage will be smooth if the line is perfectly made and matched at either end. If however there is a mismatch at both ends or along the line length the curve will no longer be perfectly smooth. This is because the two mismatches make the line to some extent resonant, with a consequent change of power output and slope of the tuning curve when the resonant frequency is attained. If the product of the reflection coefficients is too great there can even be a discontinuity. This condition is, however, unlikely to occur with practical tubes since the internal attenuator can be very well matched to the line. In the ideal case the pulling figures (as defined by the frequency excursion when a given mismatch usually 0·66 : 1 is moved through all phases along the line) is zero, but in practice this may amount to a few Mc/s at 10 000Mc/s. Very large mismatches can, in fact, be tolerated with little frequency deviation, thus when the valve is used as a local oscillator there is no need for much padding or an isolator.

M Type Oscillator

A typical example of the M type oscillator is the VX3510 made by the M.-O. Valve Co. Ltd which is shown in Fig. 8, together with the magnet required for its operation. The internal construction is similar to that shown in Fig. 5(b) with the difference that the whole system is curved into the arc of a circle. For the curvature used, however, this does not affect the operation of the tube. The gun containing an indirectly heated cathode injects a stream of electrons into the interaction space between the copper sole and the interdigital line which is brazed to the water-cooled outer block. The output is taken from the first finger of the line and matches into a standard $\frac{1}{8}$in coaxial line of 50Ω impedance. The internal transformer is designed to give a match of better than 0·5 : 1 across the tuning range. At the other end of the line the fingers are sprayed with a resistive coating to provide the internal termination.

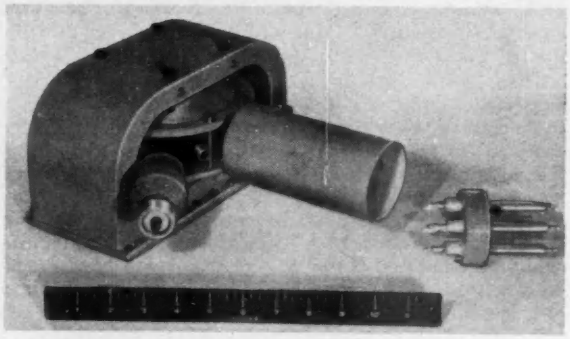

Fig. 8. M type backward wave oscillator type VX3510

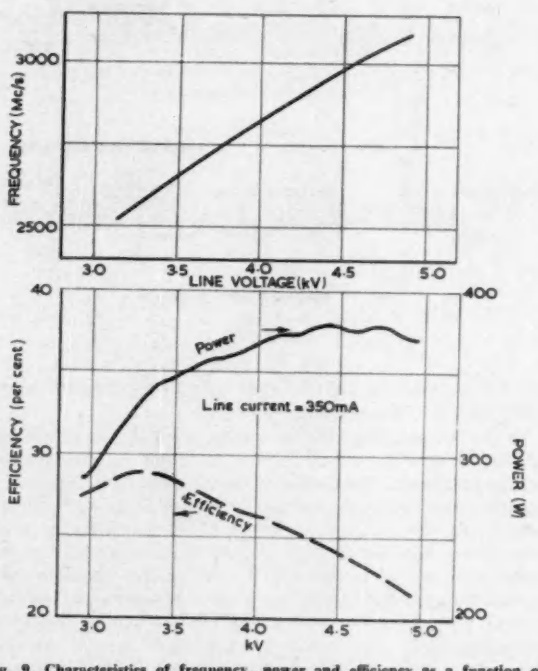

Fig. 9. Characteristics of frequency, power and efficiency as a function of line voltage for typical VX3510

Fig. 9 shows a typical operating characteristic at a line current of 350mA. Here the power, efficiency and frequency are plotted as functions of line voltage for constant current from the cathode. It is seen that unlike the O type, the M type has an almost linear frequency characteristic. This is because the electron velocity is given by E/B and is thus directly proportional to the line voltage. Assuming then that the dispersion curve for the line is linear, the tuning curve is also linear. To approach a linear tuning curve it is necessary to put the upper and lower cut-off frequencies for the line far apart. In the case of the VX3510 these are at appproximately 8 000 and 1 500Mc/s respectively.

It is seen that the efficiency falls from near 30 per cent

at the low frequency end of the band to about 20 per cent at the high frequency end. This trend is in line with theory although the absolute value of efficiency is well below the theoretical maximum. To explain how this maximum arises the mode of operation of the valve will be considered.

In the absence of any r.f. field the electrons will travel parallel to the sole along an equipotential line. If, however, an r.f. field is excited on the line the tangential component of the r.f. field will force the electrons closer to or further from the line. In the former case the electrons give energy to the wave and in the latter they extract it. As the electrons which have given up energy approach the line they will experience stronger fields and give up energy faster; the unfavourable electrons which extract energy will move further away and their interaction will become less. It should be emphasized that in the first order theory no density modulation occurs but the beam is drawn up into waves, the space charge density and the velocity remaining the same. This is in contrast to the O type in which density modulation is essential. Fig. 10 illustrates the form taken by the beam after appreciable interaction has taken place.



Fig. 10. Electron beam configuration in an M type oscillator

It is seen that when an electron arrives at the line it has given up the whole of its potential energy in passing from the original equipotential given by $V_1 - 1/2\ m/e\ (E/B)^2$ to the potential of the line, or putting it in another way, since the electrons are trapped by the wave they cannot arrive at the line with less than the energy corresponding to their precessional velocity E/B. The maximum possible efficiency of the device is thus given by:—

$$1 - (KE/PE) = 1 - \frac{\frac{1}{2}m(E/B)^2}{eV_o} = 1 - (m/2e)\ \frac{V_o}{d^2B^2}$$

where V_o is the voltage between cathode and line and d is the separation of the zero equipotential from the line. This will be th sole-line spacing if the sole is operated at cathode potential, but this is not the usual case. It is seen from the expression that the efficiency is increased by increasing B the magnetic induction for a given voltage of operation or alternatively reducing voltage for a given magnetic induction.

Examination of the efficiency curve in Fig. 9 shows that it slopes in the direction suggested by this theory. However, putting figures for the VX3510 into the equation the maximum possible efficiency at the high frequency end of the band should be of the order of 80 per cent, whereas 20 to 25 per cent is, in fact, realized. The extreme efficiency will, however, be realized only with linear orbits. If the orbits were pure cycloids the expression for efficiency becomes:

$$1 - 2(m/e)\ \frac{V}{d^2B^2}$$

since the velocity of the electron at the top of a cycloid is $2(E/B)$ which indicates a maximum efficiency of only 20 per cent. Clearly something in between these two extremes is realized.

There is a further effect, that of variation of line current. If the characteristics of Fig. 9 had been taken at a higher current, the efficiencies would also have been higher.

However, as compared with any other oscillators, particularly any with an appreciable tuning range, the efficiency is high and this feature makes the M type valve very suitable as a power oscillator.

If the gun is operated at constant bias the current will be constant and the power input will be a rising function of line voltage. Because the efficiency falls with increasing voltage, as is shown by the formula above, the change of output power over the frequency band is not so marked, amounting only to about 10 per cent for a 20 per cent frequency change. Being a transmitting valve the extremes of the tuning range are not exploited in the M type valve, e.g. although a 2:1 frequency range can be easily obtained, the power output at the low frequency end of the band becomes too small to be useful.

The M type b.w.o. is thus an ideal power oscillator for use where rapid tuning or frequency modulation is required.

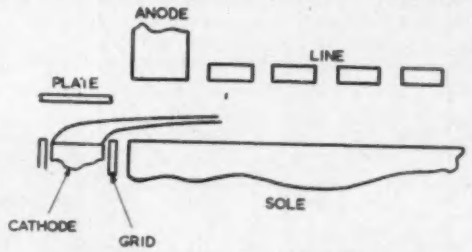

Fig. 11. Gun system for M type oscillator

By doubling the line voltage the frequency may be altered by 25 to 30 per cent if an interdigital line is employed, the variation of frequency being almost linear. Furthermore, frequency modulation with high modulation frequencies may be employed. For example in the 3 000Mc/s region deviations of 150Mc/s at a modulation frequency of 5Mc/s have been measured with little distortion.

As with the O type device there is very little change of frequency for variation of the output load impedance. For example in the 3 000Mc/s region a mismatch of 0·33:1 may only pull the frequency by 2 or 3Mc/s when moved through all phases. The figure may be considerably less than this and depends on the exact matching of the attenuator of the particular sample tested. The valve continues to oscillate if the output is completely short-circuited, but of course this condition cannot be tolerated at full power, as in this case all the power would be absorbed either in the attenuator or the output window. Tests at low power have shown that the pulling with a complete short-circuit is still only in the region of 5 to 10Mc/s for a 3 000Mc/s oscillator.

The gun system used in M type devices is completely different from the more usual O type guns. This is because of the effect of the magnetic field. The aim is to inject the electrons into the interaction space with the natural velocity of motion for that region, i.e. E/B. Electrons are accelerated from a cathode (Fig. 11) by applying a voltage to the plate immediately above it. The electrons start off normal to the cathode, but are immediately bent round in cycloidal orbits by the magnetic field. When they reach the top of their orbit they pass into the region between line and sole, where the electric field is higher, and travel approximately along an equipotential with a velocity in that direction of E/B. It should be noted that even if the velocity is not correct they will still have the same average velocity, the difference being that instead of following a linear path

they will perform oscillations about that line. It is this fact which allows of a very simple gun being used, for in practice no compensation is made for variation of line voltage. The remaining electrode, the grid, consists of a lip in front of the cathode which can be biased to alter the initial direction of travel of the electrons. It will also modulate the current, but in general the plate gives better control.

The first bar of the line is called the anode and is solidly connected to the block of the valve. It serves as an earth shield to the first finger of the line and also intercepts a large number of stray electrons which might otherwise melt the first finger.

As the plate voltage is varied the line current increases if the line voltage is kept constant (Fig. 12 curve (a)). As the current increases no oscillation occurs until a critical value

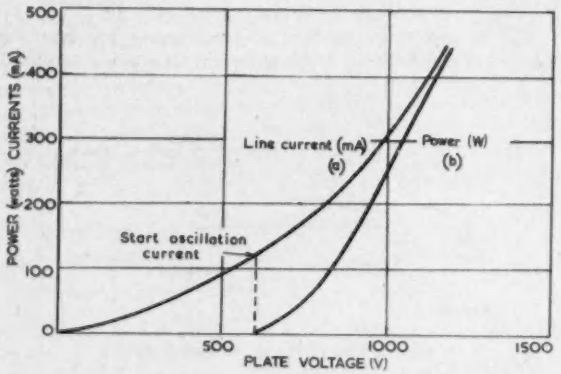

Fig. 12. Line current and power as a function of plate voltage for M type oscillator

is reached called the start-oscillation current. This is the condition in which the gain of the tube as an amplifier is exactly equal to the circuit losses. Above this current the power rises steeply (curve b). Thus it is seen that by variation of the plate voltage amplitude modulation may be obtained. As the current is increased the efficiency also increases, and in general maximum efficiency is obtained by working as far from the start oscillation current as line dissipation or cathode emission will allow.

Variation of line current is also accompanied by a small variation in frequency, the frequency increasing as the line is increased. This 'frequency pushing' as it is called is due at any rate in part to a variation of space charge density altering the electric field strength in the interaction region.

A further feature which, although common to both types of oscillator, is more frequently seen on the M type, is the occurrence of sidebands. These are not seen in the usual working range of the device, but may occur at lower voltages or higher line currents. The signal is seen to be accompanied by two sidebands displaced by a few tens of megacycles, from the carrier in the 3 000Mc/s region. This displacement remains constant when the valve is tuned. These sidebands are due to a second mode of oscillation which has a higher start-oscillation current than the main oscillation. If, however, the valve is operated at high currents this oscillation may be started. It will also beat with the main oscillation to produce the opposite sideband.

Conclusions

It is seen that the two types of backward wave oscillator, the O and M types form an unusual pair of valves having properties which are largely complementary. Each is capable of being tuned rapidly over a wide frequency range; but while the former is mainly suited to low powers because of its modest efficiency and wide variation of power over the frequency band, the latter is essentially a transmitting valve capable of delivering high mean powers with good efficiency and maintaining its power output reasonably constant over the tuning range.

These two valves are relatively new and their capabilities have not so far been fully exploited. They have however already established themselves in certain applications. Whenever a panoramic display system, such as a reflectometer or spectrum analyser, is required there is no doubt that the O type valve is supreme. It enables broad frequency bands to be covered at high sweeping speeds. Furthermore, the power output can be sampled and a signal fed back to the grid of the valve to control the beam current and hence the power output. Here the rate of variation of power with voltage sets a limit to the sweep speed and the feedback which can be applied. As oscillators with smoother characteristics become available it will be possible to operate to higher sweep frequencies.

The b.w.o. also appears attractive as a local oscillator due to the ease with which it may be tuned. So far, however, two difficulties have appeared; first there is a considerable difficulty in producing a voltage supply which is sufficiently stable to maintain the frequency constant, and it may well prove necessary to introduce a mechanically tuned cavity to which the oscillator is locked if very high stability is required. In the second place there has been difficulty with noise close to the carrier on some valves. It is well known[11] that spurious modulation of electron beams can occur at frequencies between a few kc/s and a few Mc/s due to residual gas or secondary emission phenomena. This may give rise to noise modulation which will debase the performance of a receiver unless a high intermediate frequency is employed.

The M type valve has not as yet been exploited to any extent; but it has obvious possibilities as a transmitter. For example in a simple f.m. radio link where the possibility of wide frequency modulation should allow the accommodation of many channels. Again for use in f.m. radar the wide and almost linear tuning range offers possibilities which have not been available previously. Once again the noise problem becomes important, but measurements of a.m. noise have shown that it is not excessive[7], the noise per cycle ranging from -135dB at 10kc/s to -160dB at 100Mc/s away from the carrier. Once again the challenge is to the systems designer to make use of the great potentialities of these devices.

Acknowledgments

The author is indebted to the Admiralty for permission to publish this article. Fig. 6 is reproduced by courtesy of the Mullard Research Laboratory.

REFERENCES

1. Epsztein, B., British Patent No. 699893.
2. Guenard, P., Doehler, O., Epsztein, B., Warnecke, R. Nouveaux tubes oscillateurs a large band d'accord électronique pour hyperfréquences. *Comptes Rendus Acad Sc. 235*, 236 (1952).
3. Kompfner, R., Williams, N. T. Backward-wave Tubes. *Proc. Inst. Radio Engrs. 41*, 1602 (1953).
4. Millman, S. A Spatial Harmonic Travelling-Wave Amplifier for Six Millimeters Wavelength. *Proc. Inst. Radio Engrs. 39*, 1035 (1951).
5. Sullivan, J. W. A Wide-Band Voltage Tunable Oscillator. *Proc. Inst. Radio Engrs. 42*, 1658 (1954).
6. Warnecke, R., Guenard, P. Some Recent Work in France on New Types of Valves for the Highest Radio Frequencies. *Proc. Instn. Elect. Engrs., 100*, Pt. 3, 351 (1953).
7. Warnecke, R. R., Guenard, P., Doehler, O., Epsztein, B. The 'M'-Type Carcinotron Tube. *Proc. Inst. Radio Engrs., 43*, 413 (1955).
8. Palluel, P. Recent Developpements dans le Domaine des Tubes 'Carcinotron'. *L'Onde Electrique, 36*, 318 (1956).
9. Palluel, P., Goldberger, A. K. The O-Type Carcinotron Tube. *Proc. Instn. Radio Engrs. 44*, 333 (1956).
10. Karp, A. Backward-wave Oscillator Experiments at 100 to 200 Kilomegacycles. *Proc. Instn. Radio Engrs. 45*, 496 (1957).
11. Cutler, C. C. Spurious Modulation of Electron Beams. *Proc. Instn. Radio Engrs. 44*, 61 (1956).

Triodes and Tetrodes For U.H.F.—S.H.F. Operation

By C. A. Tremlett,* B.Sc., Grad.I.E.E., and A. D. Williams,* B.Sc.(Eng.)

This review deals briefly with the advances made over the last ten years in the development of space charge control valves for operation above 300Mc/s. The improvements in technology are described with particular reference to some valve types. Two tables are included, the first giving data on valve geometry, the second summarizing general information (static characteristics, r.f. performance, etc.) regarding a wide selection of valves.

IN the last decade or so, significant advances have been made in all branches of electronic engineering, not least in the development of triodes (and some tetrodes) for use at very high frequencies. For example, the upper frequency limit for disk-seal triodes has been advanced from just over 4 000Mc/s to almost 10 000Mc/s, glass-based valves are now available which will operate efficiently at over 1 000Mc/s, and very impressive increases in power output have been reported, especially in the band 500 to 1 000Mc/s. These improvements have been obtained entirely from advances in the technology of valve making, for the valves are invariably used in conventional circuits.

From theoretical considerations it is well known[1,2] that the lead inductances and resistances, especially those to the grid, must be as low as possible to ensure electrical stability; that the inter-electrode spacings must be as small as possible in order to minimize noise and improve the high frequency performance, by reducing the time of flight of the electrons; and that the cathode must be operated at the highest current density, consistent with life, to ensure optimum efficiency. It is in the means of achieving these, and other, desirable features that these major advances have been made.

The increasing complexity of electronic equipment has called for a considerable increase in the standard of realiability demanded for all the components, and much effort has been expended on this aspect of valve design. It is not always appreciated how difficult it is even to specify requirements for life, especially for triodes, which tend to be general-purpose valves and the same type may be used in a wide variety of equipments. For example, the life and reliability requirements for valves employed in the repeater stations of a submarine cable, and in guided missiles, are quite different.

This article will deal first with some of the more important advances in valve technology, and will then review the performance of some of the resulting valves.

Developments in Technology

The Envelope

The maximum temperature to which a valve can be baked during processing is about 400°C if it employs a 'soft' glass, or about 550°C if it uses a 'hard' glass, these values being determined by the viscosity of the glass.

Considerable advances have been made in the precision with which the glass sealing operations are carried out, particularly in the case of the disk-seal valve envelopes. For example, jigs are in use which result in the planes of the electrodes being in a position at right-angles to the axis of the system to an accuracy of $\pm$·003in per inch of radius. This may be improved by a factor of about five by subsequent machining.

* *Research Laboratories of The General Electric Co. Ltd., Wembley.*

If the glass can be replaced by a ceramic, the maximum baking temperature may be increased to about 750°C, and is determined by the vapour pressure of the metal used to braze the ceramic to the metal components. This higher temperature enables a much better vacuum to be obtained in the finished valve, with corresponding improvements in its life and performance. However, the greater temperature range coupled with the different non-linearity of metal and ceramic expansion coefficients make it much more difficult to match the metal and ceramic components up to the brazing temperature[3] of about 900°C.

Fig. 1. Ceramic triode valve U.L.11. (Photograph reproduced by permission of Ferranti Ltd.)

Although the pioneer work on ceramic/metal envelopes was done in Germany over twenty years ago[4], it is only quite recently that reliable solutions to some of the technical problems have been found, and several types of ceramic-envelope disk-seal valves are now becoming available, for example, the U.L.11 (Fig. 1) in this country and the 6181, 2C39B and 6BY4 in the U.S.A.

As ceramic components are conveniently ground to close tolerances, and as no distortion occurs during brazing to the metal parts, the mechanical tolerances on the valve envelope are small. This may sometimes be achieved without using jigs. In addition, the loss factor is less than for glass, an important point in the design of high power valves, and the higher outgassing temperature which may be employed with ceramic valves enables higher operating temperatures to be used[5].

As ceramic materials generally have low coefficients of expansion, and a considerably higher thermal conductivity than glass, their ability to withstand thermal shock is superior. They are also better able to resist mechanical shock and their use has made possible the construction of more robust envelopes. A typical valve using such an envelope is the U.L.11, which will operate with the anode temperature at 350°C.

New Brazing Alloys

In recent years new brazing alloys have been developed as a result of pressure from valve engineers[3]. The demand for them arises from several reasons, probably the most important

of which occurs when a number of successive brazes are made during the assembly of a valve. This process, known as step brazing, was, until recently, quite difficult to accomplish in view of the large difference between liquidus and solidus temperatures of some long-established alloys. In addition, these standard alloys have been found unsuitable in valves of ceramic construction as the vapour pressure of one or more constituent metals is too high. Improvements have also been made in wetting properties and alternatives have had to be found for the gold alloys, which when used to braze copper suffer the handicap of too high a rate of diffusion.

As examples of these new materials, the range of several silver-copper-palladium alloys may be quoted as having very good wetting properties. The use of indium to make ternary alloys with silver and copper, has extended the lower end of the temperature range, while similar alloys of indium, copper and gold have lower vapour pressures and similar melting points to the standard silver-copper alloys. The importance of making all vacuum-tube brazing alloys to better standards of purity has only been appreciated relatively recently. For example, traces of carbon, present in hitherto unobjectionable quantities, have been shown to cause regions of poor wetting, and more dangerously, voids in the brazing material, with the attendant danger of leaks.

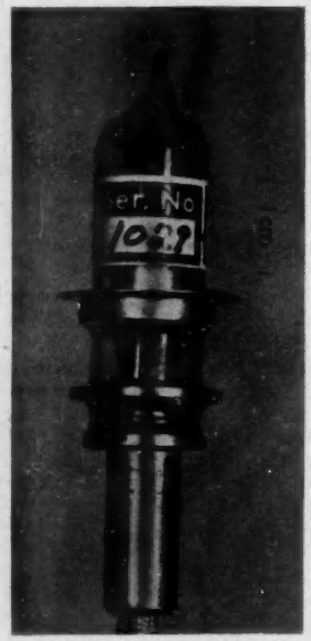

Fig. 2. Triode valve DET29

Cathodes

Of the total time an electron takes to travel from cathode to anode, the major portion is spent in moving from the cathode to the plane of the grid. This cathode grid transit time (T *sec*) is approximately given by the relationship $T = 6{\cdot}7\times10^{-10}\,(d/j)^{\frac{1}{2}}$ where d is the cathode grid clearance in cm and j the current density in A/cm². This clearly calls for high current density and small grid cathode clearance.

For almost twenty years prior to 1950, the conventional cathode consisted primarily of a mixture of barium and strontium oxides on a nickel base. Over this period research and development effort succeeded in explaining more or less satisfactorily the mechanism of operation of these cathodes, and as a result they are consistently produced under mass-production conditions with a high degree of uniformity of emission, following a very short period of activation. From an oxide-coated cathode a mean current density of 300 to 400mA/cm² may be taken in c.w. class-C operation, and a life of several thousand hours be obtained (e.g., DET29, Fig. 2). During the past eight years, however, several new types of cathode have been evolved and although none of these is likely to supersede the oxide cathode for general use, they are proving very useful in improving the performance of high frequency valves.

In the L cathode[6] the barium and strontium atoms reach the cathode surface by diffusing through a porous tungsten plug. This design not only removes the lossy reservoir of oxides from the r.f. field, but permits the current density from the cathode to be increased from about 350mA/cm² to about 750mA/cm². Development work is still proceeding on variations of this basic design, and at least one triode currently in production, the EC57 (Fig. 3) uses this type of cathode.

It is under pulse conditions that the significance of high current density is most apparent, an increase of 5 to 20:1 over c.w. operation being possible[7]. This may be illustrated by comparing the performance of the ACT27 (Fig. 4) with that of the geometrically identical ACT28 (CV2163).

	$V_{a\,(max)}$ (kV)	$I_{a\,(max)}$ (A)	Frequency at which efficiency has fallen to 25% (Mc/s)
ACT27			
c.w. operation	1·5	1·5	400
ACT28			
pulse operation up to 5μsec	11·0	50·0	900 (estimated)

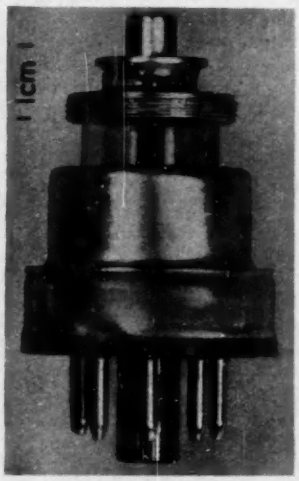

Fig. 3. Triode valve EC57 (Photograph reproduced by permission of Mullard Ltd.)

An additional advantage of high current density is that a smaller cathode area can be used to obtain the same mutual conductance, thus giving some compensation for the increased capacitance resulting from closer clearance.

While demands for increased output power have led to attempts to employ higher anode potentials, experience has shown that, for oxide coated valves, it is dangerous to exceed 1·5kV in c.w. operation. This is because the contamination of other electrodes by barium during life leads to electrical breakdown which disrupts the cathode coating. L cathodes are much more able to withstand the effects of such discharges, though the incidence of these is not materially altered by the use of such cathodes.

Advances in metallurgy have resulted in the development of sheet thoriated tungsten, and this has enabled unipotential cathodes to be made from this material for power valves, as, for example, in the Eimac 4W 20 000A. In addition, this sheet material has made the manufacture of strip filaments possible, thus leading to more efficient electron gun designs in beam power tubes. Thoriated tungsten cathodes also permit the application of high voltages on c.w. and this has been a significant factor in the development of the R.C.A. valve type[8] 6448 (Fig. 5) and its later version the 6806. Their development types [13] A2346 and A2335, which also employ such a cathode, are also able to operate at high voltages. Such valves as these owe a considerable amount to the work done on the Resnatron[9] which is a high power tetrode with an r.f. circuit constructed within the envelope. An interesting lower power transmitting valve[10] with a thoriated cathode is the TBL 2/300 which is capable of operating with $V_a = 2{\cdot}5$kV below 200Mc/s. This voltage must be reduced by stages up to the maximum frequency of 900Mc/s due to increasing

losses in the glass. The use of a high anode voltage permits designs with larger grid anode clearances, smaller output capacitances and thus larger bandwidths.

Grid Materials

The majority of the valves for use above 300Mc/s either use plane grids, in which the wires are brazed to a rigid frame, or squirrel-cage grids. In either case it is usual to use molybdenum or tungsten wire, owing to their desirable properties of good thermal and electrical conductivity, low coefficients of expansion and high hot strength. Tungsten can be drawn down to 10 micron diameter and has been electro-etched down to 3 micron diameter, while all sizes can be gold-plated before use in grid manufacture. The purpose of gold plating is to provide a surface which, at the elevated operating temperature of the wires, will absorb barium as it evaporates from the cathode and so prevent the formation of barium oxide, which may cause grid emission. The maximum temperature at which such gold-plated grids can operate is in the region of 600°C, values higher than this causing gold to evaporate with subsequent rapid loss of

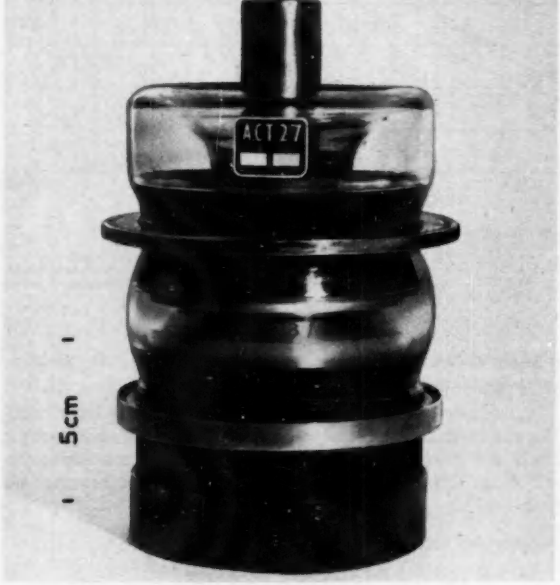

Fig. 4. Triode valve ACT27

emission. For medium power valves employing a squirrel-cage type of grid in which the length/diameter ratio of the wires is small, gold-plated copper wires have been successfully used. The dissipation may, in this way, be well over twice that which can be tolerated in a more conventional molybdenum grid for the same level of primary emission; grids such as this are employed in the ACT27 and the 6181. The use of either molybdenum or tungsten, clad with a layer of platinum of a thickness of about 10 per cent of the radius of the wire, has become almost universal for lower frequency high power valves during the past ten years, and is now being used for valves within the u.h.f. range which employ thoriated tungsten cathodes. The platinum absorbs the evaporated thorium in the same way as gold absorbs evaporated barium. The maximum temperature of operation is in the region of 1 200°C and the maximum dissipation about 10W/cm^2. More recently methods have been developed to increase the emissivity of the surface and have raised this figure to the region[11] of 15W/cm^2.

New Grid-making Techniques

The two most important mechanical features in any microwave triode are the accuracy to which the grid is made, and the accuracy to which the grid cathode clearance is maintained.

The majority of close-clearance valves use planar frame grids, and the wires are permanently stretched by inelastic deformation of the frame. In this way a very rigid structure can be made, with wire as fine as can be handled. It is not only in obtaining a reasonable accuracy of pitch at around 500 turn/in, but also in the handling of the very fine wire, of between 5 and 10 microns (0·0002 in to 0·0004 in) diameter, that difficulties arise, and an interesting new method of doing this has recently been developed[12]. At the present time the best that can be achieved in production values is a grid-cathode clearance of 15 micron using a grid wire of about 5 micron diameter.

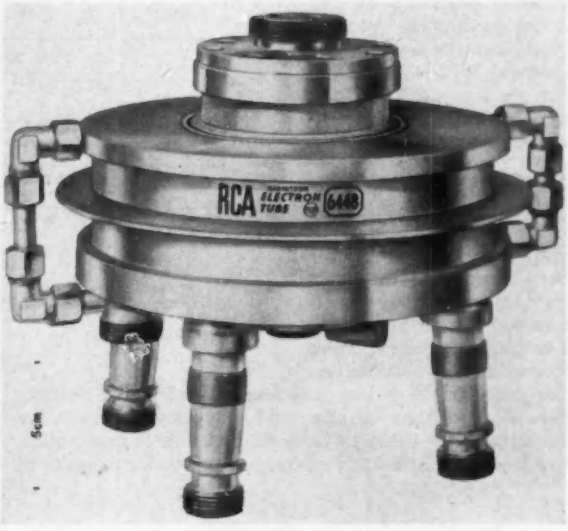

Fig. 5. Tetrode valve 6448 (Photograph reproduced by permission of Radio Corporation of America)

Recent work with cylindrical grids using a mesh formation has shown that with such a construction greater rigidity may be obtained than with the squirrel cage. It should therefore be possible to use finer wires and to make medium power u.h.f. valves with this form of grid construction.

New methods of fabricating copper and copper-alloy grids for medium power valves have been developed. For example, beryllium copper has been used by R.C.A. to form squirrel-cage grids by their 'Uniscan' process, which consists essentially of simultaneously rolling and spinning the material into grooves cut in the surface of a cylindrical mandrel parallel to the axis. This material formed into the grooves constitutes the grid wires after the web joining them has been carefully etched away in acid. The mandrel is, of course, so shaped as to leave a supporting band for the wires at each end.

The present state of constructional techniques is illustrated by Table 1, which gives the important dimensions of some valves which have appeared in recent years.

Cooling Methods

Medium power valves in the u.h.f. band rely mainly upon forced air to dissipate heat at the anode. The performance of the type of cooler fitted to valves such as the 6181 and ACT27 represents the probable limit which can be achieved with this kind of design, being in the region 1W/cm² of fin surface. The influence of such considerations as the maximum seal temperature and the intricacy of the conduction path, make this figure only a guide. In a number of the smaller u.h.f. triode coolers the fins consist of thin circular washers arranged perpendicular to the axis of the anode, this general design being considerably less efficient.

The highest power valves[13] such as the R.C.A. development types A2346 and A2335 may be taken as examples of the best loadings which have been or are likely to be achieved by water cooling of relatively large areas. The dissipation is probably in the range of 6-8kW/cm², and improvements on this are almost certainly precluded by the thermo-mechanical stresses which would be set up in the structure. With small dissipation areas of up to perhaps 5cm², as much as 10kW/cm² can be reached[14].

Life Considerations

Satisfactory emission may be obtained from cathodes with a barium surface for many thousands of hours provided reasonable care is exercised during both valve manufacture and valve operation. However, barium is deposited on the grid wires by evaporation from the cathode, increasing the wire diameter and thus changing the valve characteristics. While this effect is negligible in most valves, it becomes an increasingly serious problem as the diameter of the grid wire is reduced, and leads to failure considerably before the end of emission life. The difficulty can be reduced to some extent by careful choice of operating conditions[15], but it is probable that this grid wire growth, rather than mechanical difficulties, will determine the ultimate limit for grid wire diameter. For example, the use of 10 micron grid wire forces the valve manufacturer to give the problem close attention, and it is unlikely that grid wire finer than 5 micron can be used in a sound design.

As far as manufacture of microwave triodes is concerned there is no doubt that the establishment of dust-free conditions is a *sine qua non* of success. In parallel with the measures taken to achieve these conditions[16] the use of ultrasonic cleaning is now steadily growing and is likely to have the widest application.

In addition, new assembly techniques are being developed. For example, the use of argon-arc welding and high speed r.f. brazing considerably reduces the dangers of contamination which are inherent in the older methods of torch brazing and glass sealing.

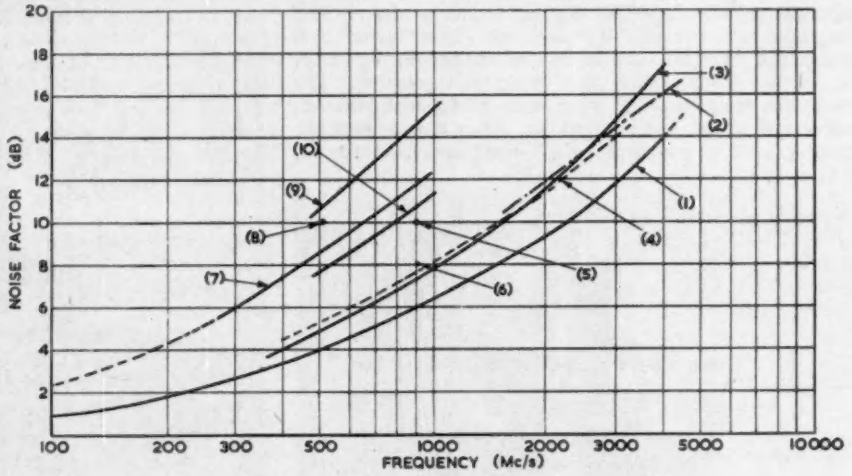

Fig. 6. Variation of noise factor with frequency

(1) 416A and 416B disk-seal triodes
(2) DET29 disk-seal triode
(3) EC57 disk-seal triode
(4) GL-6299 ceramic disk-seal triode
(5) EC56 disk-seal triode
(6) 6BY4 ceramic disk-seal triode
(7) A2521 glass-based valve
(8) CV354 disk-seal triode
(9) 6AJ4/6AM4 glass-based valves
(10) 6BA4 disk-seal triode

TABLE 1
Some Electrode Dimensions of Selected Microwave Valves

VALVE NO.	GRID/CATHODE CLEARANCE (MICRON)	GRID WIRE DIAM. (MICRON)	GRID (TURNS/IN)	CATHODE CURRENT DENSITY (A/Cm²)	
A2521	40	10	506	0·15	Glass Base Valves
6AJ4, 6AM4	51	20	250	0·2	
416B	15	7·5	1000	—	Low Power Disk-Seal Valves
6BY4	15	7·5	1000	0·20	
DET29	35	10	500	0·32	
6BA4	37	20	360	—	
EC57	40	7·5	530	0·72	
UL11	125	50	Mesh	0·15	
CV354	200	30	240	0·20	
2C39B	80	50	170	0·2	Medium and High Power Disk-Seal Valves
4X150G*, 4CX150G*	250	120	39	0·1	
ACT27	600	300	24	0·075	
6448*	500	90	36	0·4	

* *Tetrode.*

Application Considerations

Triodes for u.h.f.-s.h.f. service are usually considered to be general-purpose devices and the present tendency is to publish information covering as many applications as possible extending over the widest frequency range. The need to do this arises from the fact that in most cases it is difficult to calculate the r.f. performance at all accurately, though a fair estimate can be obtained[17,18].

Noise Factor

For a number of well-known reasons[19,20] the significance of noise factor has assumed more and more importance, and the above remarks concerning the difficulty of accurate calculation, particularly apply. The valve design factors which tend to improve noise factor are similar to those which lead to good r.f. performance in general. The measurement of the noise factor of triodes in the u.h.f. region is usually carried out using noise diodes, and significant discrepancies occur between the published results of different workers. A great deal of effort has been made to reduce these discrepancies[20, 21]. Noise generators have been extensively

TABLE 2
Performance Data on Selected Space Charge Control Valves for Operation in the Microwave Frequency Range

VALVE TYPE	TYPE OF CATHODE	PULSE VOLTS	MAXIMUM ANODE RATINGS			MUTUAL CONDUCTANCE (mA/V at Ia mA		μ	CAPACITANCES (pF)			FREQUENCY (Mc/s)	OSCILLATOR OUTPUT WATTS	SMALL SIGNAL	AMPLIFIER	LARGE SIGNAL	AMPLIFIER	OUTPUT WATTS
			D.C. VOLTS	D.C. mA	WATTS				Cgk	Cga	Cak			BANDWIDTH (Mc/s)	GAIN (dB)	BANDWIDTH (Mc/s)	GAIN (dB)	
6AJ4 Glass-based low noise triode c/c	Oxide	—	150	20	2·0	10·0	16	42	4·4	2.8	0·16	500 900	—	10 10	8·3 7·2	—	—	—
6AM4 Glass-based low noise triode c/c	Oxide	—	200	20	2·0	9·8	10	85	4·6	2·8	0·16	500 900	— —	10 10	7·2 7·0	—	—	—
A2521 Glass-based low noise triode c/c	Oxide	—	250	20·0	2·5	15·0	15	66	3·5	1·6	0·06	500 600 900 1250	0·7 — — 0·15	— 10 10	— 18·0 14·0	—	—	—
6AF4 Glass-based oscillator triode c/c	Oxide	—	150	28	2·25	6·6	16	15	2·2	1·9	0·45	500 900	0·4 0·3	—	—	—	—	—
EC81 Glass-based oscillator triode c/c	Oxide	—	170	30	5·0	5·5	30	16	1·7	1·5	0·5	500 1000	3·0 1·25	—	—	—	—	—
6BY4 Ceramic disk-seal low noise triode c/c	Oxide	—	300	5·5	1·1	6·5	5·0	100	2·0	0·7	0·007	900	—	10	15	—	—	—
GL6299 Ceramic disk-seal low noise triode c/c	Oxide	—	200	11·0	2·0	12·0	10	115	3·5	1·7	0·01	1200 3000	— —	10 10	16·0 11·0	— —	— —	— —
416B Disk-seal triode c/c	Oxide	—	270	30	7·5	50·0	30	200	11·1	1.45	0·019	4000 4000	— —	— —	— —	100 70	10·0 5·5	0·065 0·57
EC57 Disk-seal triode c/c	Lemmens	—	300	70	10·0	20·0	60	43	3·3	1·6	0·04	4000	3·0	—	—	100	4·0	1·5
DET29 Disk-seal triode c/c	Oxide	—	400	40	10·0	16·0	10	65	3·4	1·2	0·03	2300 4000	3·2 2·1	50 50	14·0 12·5	50 50	7·5 4·5	1·75 1·0
UL11 Ceramic disk-seal triode c/c*	Oxide	5000	500	200	30	14·5	50	19	6·5	5·5	—	400 1000	5·5 3·5	— —	— —	— —	— —	— —
2C39 Disk-seal triode forced-air-cooled	Oxide	—	1000	125	100	22·0	125	100	6·5	1·95	0·035	500 2500	— 15·0	— —	— —	— —	6·5 —	27 —
TBL2/300 Disk-seal triode forced-air-cooled	Thoriated Tungsten	—	1750 at 470 Mc/s 1300 at 900 Mc/s	400 — —	260 at 470 Mc/s 300 at 900 Mc/s	18·0	—	32	9·0	4·0	0·12	470 470 900	405 — 155	—	—	20 20	12·0† 5·0‡	—
LD9 Ceramic disk-seal triode forced-air-cooled	Oxide	—	1500	175	300	23	100	—	9·0	3·0	0·025	1700 3000	40 15	—	—	—	—	—
ACT27 Disk-seal triode forced-air-cooled	Oxide	—	1500	1500	1500	40	500	50	30	28·0	0·5	400	900	—	—	—	—	—
ACT28 Pulse version of ACT27 forced-air-cooled	Oxide	11000	—	50000 (Pulse)	1500	—	—	—	—	—	—	600	250000 (Pulse)	—	—	—	—	—
									C_{IN}	C_{OUT}	C_a/g_1							
4CX150G Ceramic and 4X150G glass tetrode disk-seal forced-air-cooled	Oxide	— 7000	1250	250 6000 (Pulse)	150	12·0	200	—	16·0	4·5	0·03	750 1200	100 20000 (Pulse)	—	—	—	—	—
4CX300A General-purpose ceramic tetrode forced-air-cooled	Oxide	—	2000	250	300	12·0	250	—	29·5	4·6	0·035	500	225	—	—	—	21·0	410
6181 Disk-seal tetrode forced-air-cooled	Nickel Mush	—	2000	1750	2000	—	—	—	44	22	0·1	900	—	—	—	—	8·0	1200
6448 Water-cooled power beam valve	Thoriated Tungsten	—	7000	7000	26000	—	—	—	335	30	0·1	400 900	— —	— —	— —	— —	15·5 11·0	14000 11000
A2346 Development triode water-cooled	Thoriated Tungsten	—	—	—	$0·9 \times 10^6$	—	—	—	—	—	—	600 400	600000 25×10^6 (Pulse)	—	—	—	—	—
A2335 Development triode water-cooled	Thoriated Tungsten	—	—	—	120000	—	—	—	—	—	—	900 1000	80000 5×10^6 (Pulse)	—	—	—	—	—

* Increased performance can be obtained with forced air cooling. c/c = Convection/Conduction Cooled.
† Grounded Cathode. ‡ Grounded Grid.

investigated as they are the reference standards by which the noise level in valves is determined. Of the two types of generator used, the discharge tube has been employed successfully in the microwave region[22,23], while coaxial noise diodes such as the CV2341 are used up to 1 000Mc/s. The published variation of noise factor with frequency on a number of available receiving valves is shown in Fig. 6. As far as can be ascertained the noise factors at frequencies below 1 000Mc/s have been measured using diode noise generators and those at higher frequencies using discharge tube generators. It is assumed that the valves were measured under optimum running conditions and that the figures quoted apply to the first stage alone.

Circuits

As the frequency rises it becomes impossible to consider valve and circuit separately, and the larger the valve, the lower the frequency at which this holds. The great majority of circuits used in the u.h.f.-s.h.f. band are of the common grid type. For small glass-based valves 500Mc/s represents the approximate limit at which lumped capacitances and inductances may be used with reasonable efficiency. In recent years good performance has been achieved with valves such as the A2521 (Fig. 7) up to 1 000Mc/s when operated in trough-line circuits.

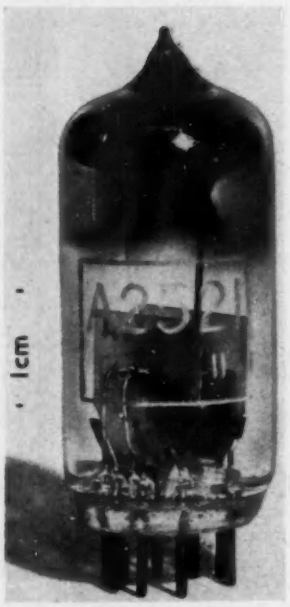

Fig. 7. Triode valve A2521

The design of resonators and coaxial lines used with disk-seal valves depends upon the particular application[24]. Quarter-wave mode operation is always desirable, but its mechanical realization is not always possible at the higher frequencies. Higher modes of operation have the disadvantage of reduced bandwidth and tend to increase circuit losses.

A number of valve properties make it difficult to calculate circuit dimensions accurately. For example, the metal components of the envelope and the internal electrode support structures become part of the circuit, thus increasing its length. The capacitance loading is then considerably less than the static capacitance and approaches that of the working area alone. This point is illustrated by data[25] on the EC57.

	Static capacitances (*pF*)	*H.F. capacitances* (*pF*)
Cgc	3·3	1·8
Cag	1·6	0·6

Also the configuration of the envelope introduces electrical discontinuities, by virtue of both geometry alone and the presence of glass or ceramic insulators. Typical examples of modern u.h.f.-s.h.f. circuits have been described for use with the 416A[26], the 6448[8] and the TBL 2/300[10]. The first of these illustrates how a number of such circuits can be used in cascade to give high gain, while the second employs an interesting method of overcoming the problem of mismatch between valve and circuit at high power level. It has been shown possible to increase the power which may be obtained from a particular valve type by employing a number of them in parallel in an annular circuit[28,29].

Future Developments

At the end of the article on valves in the 1950 v.h.f. issue of this journal[29], it was suggested that triodes would probably be made eventually to operate down to a wavelength of 3cm. This has now been achieved by the most advanced of the small disk-seal valves described here, although the limit of their useful power output is probably at about 4·5cm.

The lower limit of grid wire diameter which can be used appears to be in the region of 3 microns, and if grids with from 1 000 to 2 000 turns/in can be successfully made with this diameter of wire, then a further step forward in s.h.f. performance will be made.

The use of multiple beam systems has, in this period resulted in about a thirtyfold increase in power level in the region of 1 000Mc/s, while the ratio at somewhat lower frequencies has been even more impressive. It is likely therefore that the same design principles, when applied to valves for operation at higher frequencies in the u.h.f. band will lead to further increases in r.f. power output.

Acknowledgment

The authors wish to thank the M.O. Valve Company Limited for permission to publish this review.

REFERENCES

1. Beck, A. H. W. Thermionic Valves. (Cambridge University Press, London, 1953.)
2. Benham, W. E., Harris, I. A. The U.H.F. Performance of Receiving Valves. (MacDonald, London, 1957.)
3. Kohl, W. H. Materials Technology for Electron Tubes. Ch. 16 (Rheinhold, New York, 1951.)
4. Espe, W., Knoll, M. Werkstoffkunde und Hochvakuumtechnik, Ch. 25. (J. Springer, Berlin, 1936.)
5. Begos, J. E., The Use of Titanium Metal in Vacuum Devices. *I.R.E. Trans. Electron Devices, ED-3*, No. 2, 93 (1956).
6. Lemmens, H. J., Jansen, M. J., Loosjes, R. A New Thermionic Cathode for Heavy Loads. *Philips Tech. Rev. 11*, 341 (1950).
7. Wright, D. A. A Survey of Present Knowledge of Thermionic Emitters. *Proc. Instn. Elect. Engrs. 100*, Pt. 3, 125 (1953).
8. Bennett, W. P. New Beam Power Tubes for U.H.F. Service. *I.R.E. Trans. Electron Devices ED-3*, 57 (1956).
9. McCreary, R. L., Armstrong, W. J., McNees, S. G. An Axial-Flow Resnatron for U.H.F. *Proc. Inst. Radio Engrs. 41*, 42 (1953).
10. Papenhuizen, P. J. A Transmitting Triode for Frequencies up to 900Mc/s. *Philips Tech. Rev. 19*, 118 (1957-58).
11. Esperson, G. A., Rogers, R. W. Studies on Grid Emission. *I.R.E. Trans. Electron Devices ED-3*, 100 (1956).
12. Widdowson, A. E., Gore, D. C., Butcher, C. H. A New Method of Making Accurate Fine-Wire Grids for Use in Radio Valves. (*To be published.*)
13. Kleen, W. On the Present Limitations of Electron Tubes with Respect to Power Frequency and Noise. *Elektrotech. Z. 77*, 769 (1957).
14. Hickey, J. S. Heat Transfer at High Power Densities. *J. Appl. Phys. 24*, 1312 (1953).
15. Metson, G. H. A Study of the Long-Term Emission Behaviour of an Oxide Cathode Valve. *Proc. Inst. Elect. Engrs. 102B*, 657 (1955).
16. Jenkins, D. E. P. Clean Rooms for Special Valve Assembly. *Instrum. Pract. 8*, 1085 (1954).
17. Pohl, W. J., Rogers, D. C. U.H.F. Triodes. *Wireless Engr, 32*, 47 (1955).
18. Giacoletto, L. J., Johnson, H. U.H.F. Triode Design in Terms of Operating Parameters and Electrode Spacings. *Proc. Inst. Radio Engrs. 41*, 51 (1953).
19. Thomson, J. Radio Communication at Ultra-High-Frequencies. (Methuen, London, 1950).
20. Van der Ziel, A. Noise. (Chapman and Hall, London, 1955.)
21. Houlding, M. Valve and Receiver Noise Measurement at V.H.F. *Wireless Engr. 31*, 15 (1954).
22. Hughes, V. A. Absolute Calibration of a Standard Temperature Noise Source for Use with S-Band Radiometers. *Proc. Instn. Elect. Engrs. 103B*, 669 (1956).
23. Sutcliffe, H. Noise Measurements in the 3cm Waveband Using a Hot Source. *Proc. Instn. Elect. Engrs. 103B*, 673 (1956).
24. Grifone, L. Dimensionsanento della Cavita Coassiali per i Tubi ad Elettrodi Piani. *Alta Frequenza 23*, 357 (1954).
25. Diemer, G., Rodenhuis, K., Van Wijngaarden, J. G. The EC57, A Disk-Seal Microwave Triode with L-Cathode. *Philips Tech. Rev. 18*, 317 (1956-57).
26. Bowen, A. E., Mumford, W. W. A New Microwave Triode. Its Performance as a Modulator and as an Amplifier. *Bell Syst. Tech. J. 29*, 531 (1950).
27. Priest, D. H. Annular Circuits for High Power Multiple Tube R.F. Generators at V.H.F. and U.H.F. *Proc. Inst. Radio Engrs. 38*, 515 (1950).
28. Sayer, W. H., Mehrbach, E. U.H.F. Transmitter Uses Beer-Barrel Cavity. *Electronics 24*, 125 (Dec. 1951).
29. A Survey of V.H.F. Valve Developments. *Electronic Engng. 22*, 310 (1950).

Ferrite Components in Microwave Systems

By B. L. Humphreys*, B.Sc.

This article considers some of the many ways in which ferrite components are used in microwave communication systems, indicating present possibilities and limitations.

THE development of microwave ferrite components has given the systems engineer a range of passive circuit elements having properties which were previously unobtainable except by using active elements and mechanical components, or which could not be obtained at all. These circuit elements lead to techniques of great value both in experimental work and in engineered equipment.

The outstanding feature of microwave ferrite components is that, although they are passive elements they can have non-reciprocal characteristics. It must be appreciated, however, that not all microwave ferrite components have non-reciprocal properties and in fact a reciprocal characteristic may be desirable in some cases.

The most commonly used microwave ferrite elements such as the isolator or the circulator have a constant applied magnetic field, but by using a variable magnetic field elements for switching, modulating, a.g.c., a.f.c. and other purposes can be designed[1].

Although much of the experimental work on microwave ferrite components has been done in the 10 000Mc/s region, the results are applicable in principle at all frequencies. Components have been made at 50 000Mc/s and at 200Mc/s, and the frequency limits within which components can usefully be made are probably much wider than this.

Ferrite components have not only been made in hollow waveguide systems but isolators based on strip-lines and coaxial lines have also been constructed.

Even though the full scope of passive ferrite devices has not yet been explored, active elements such as amplifiers and mixers are also being developed. The reported results indicate that, in some respects, these new devices are superior to existing valves, through their lower noise figure, or their higher power handling capabilities. This development is, however, at a too early stage for a full assessment to be made and a better appreciation of their possibilities will only be obtained after more widespread use of these elements.

Components With Constant Applied Field

The Gyrator

The first non-reciprocal passive element was termed the gyrator and was introduced in a theoretical paper by Telegen[2] as a new circuit element. It has the property of transmitting a signal unchanged in one direction of propagation, but reversing its phase for the other direction (Fig. 1).

In practice this property can be achieved at microwave frequencies only in association with a reciprocal phase shift. This constant term, however, does not affect the essential performance of the component and it is on this element that the circulator is based. It may be said, in fact, that the design of all non-reciprocal passive elements may be based on the gyrator.

* *Mullard Research Laboratories*

The Isolator

This circuit element is probably the most commonly used of all microwave ferrite components. It is a two port, four terminal network, Fig. 2, with non-reciprocal transfer impedances. Its basic property is that the attenuation between ports is dependent upon the direction of propagation. Ideally the isolator has zero attenuation for one direction of propagation and infinite for the other, while maintaining the correct input and output impedances. In practice these ideals are by no means obtained, and the choice of isolator must be determined by the application requirements.

The isolator may be of two types, those which absorb power within the ferrite itself, such as the resonance absorption type[3] and those which divert power into an additional load, such as the field displacement isolator[4] or those based on the circulator[5].



Fig. 1. The gyrator



Fig. 2. The isolator

Their principal use derives from their property to absorb the reflected power without attenuating the incident power. Thus a power source working into an isolator will have a substantially constant load independent of changes in the system. Isolators have been designed to operate at all frequencies between 200Mc/s and 70 000Mc/s and a typical isolator at X-band will have an insertion loss of less than 1dB and an isolation of greater than 20dB, for a 5 to 10 per cent bandwidth, although very much better performances have been quoted[6]. Such an isolator reduces the incident power by only 20 per cent and yet changes a reflection coefficient of unity to 0·1, i.e. a zero v.s.w.r. becomes 0·82, assuming the isolator itself does not introduce reflection.

In the laboratory this non-reciprocal property is of great value in the protection of stable power sources, as the frequency and amplitude of the signal from most microwave sources is dependent to more or less extent on the load into which they are operating. The same degree of stability can of course be achieved by using a reciprocal attenuator of one half the isolation value of the isolator, but the available output power is then reduced by this amount and with this, the sensitivity of the system. The use of an isolator to increase the power available from a signal source may result in a great saving of size, weight and cost. When the power requirements are such that

attenuator pads can be used, the degree of isolation can be increased until the insertion loss of the isolators is equal to that of the pad. If for example a 6dB pad is used, so that the total isolation is 12dB, isolators of the performance quoted above could be used to give an isolation of 120dB without reducing the forward going power level.

The reduction of the reflected power will reduce the frequency pulling effect of aerial systems on magnetrons or klystron oscillators, especially in the case of scanned aerials, where changes in the reflection coefficient will result in a frequency modulation of the transmitter. Frequency control either by electrode potential or by cavity tuning is simplified by isolators, as the oscillator then operates into a substantially constant and nearly resistive load and unwanted frequency pulling effects of the system are practically eliminated.

In a communications system where microwave amplifiers may be cascaded, each stage may be fed from and into substantially matched terminations by the use of isolators between stages. This is of particular application to microwave triode amplifiers where there is considerable coupling between output and input circuits.

The isolator also enables two power sources to be coupled together in a system, without the one affecting the performance of the other. This has been used to great effect in a swept frequency signal generator, where the output signal was obtained by mixing two microwave signals.

Isolators are also valuable in systems when it is necessary to keep reflections to a minimum, such as in communication systems, where time delays in long waveguide runs may lead to channel intermodulation. In this application the isolator itself must be well matched as it is clearly of no value to absorb one reflection, only to replace it by another and possibly larger one.

The considerations so far have paid no attention to power levels but apart from electrical breakdown within the guide, changes in the performance of the isolator can occur with temperature. Isolators for high power use are usually different in design from those for low powers, the difference arising from the need to keep the temperature of the ferrite as constant as possible. In this context low powers refer to levels of up to a few watts. The problem of heating is reduced either by obtaining the best possible contact between the ferrite and the heat sink, as in the high power resonance isolator, or by air cooling in the Faraday rotation circulator where the ferrite is supported centrally along the axis of the waveguide.

At X-band isolators have been made which will handle peak powers of the order of 250kW and absorb mean powers of the order of 100W.

The degree of isolation required clearly depends on the application, and one figure of merit of an isolator is the ratio of the isolation to the forward insertion loss both expressed in decibels. While 20 to 30 are typical values for this ratio, isolators in which the ratio is over 200 have been constructed. This increase in the ratio is often accompanied by a decrease in the bandwidth and an increase in the sensitivity to external influences. The bandwidth of an isolator has been defined as the frequency range over which the isolator has greater than one half the peak attenuation, but once again it is the application that determines its usefulness, the specification usually being that a certain minimum performance over the entire frequency range is required.

The Circulator

The circulator is not analogous to any simple electronic system and is a multi-port component in which power may be transmitted unidirectionally between consecutive ports, while maintaining a high degree of isolation between all other pairs of ports. The three and four port circulators Figs. 3 and 4, are the simplest forms, from which the multi-port circulator can be derived by cascading. It may be noted that each additional four port circulator adds two more ports per element whereas the three port circulator only adds one, and that a three port circulator can be derived from the four port element by short-circuiting the unwanted port.

The most commonly used circulator is the four port component based either on Faraday rotation or differential phase shift. The former have been constructed with low insertion loss, less than ½dB, and with high isolation through unwanted paths, greater than 40dB for bandwidths of about 1 per cent at 10 000Mc/s. The phase shift circulator, appears to be inherently of a broader band nature,



Fig. 3. Three port circulator



Fig. 4. Four port circulator showing its use for duplexing

5 per cent at X-band but quoted figures suggest the isolation is reduced to between 20 and 30dB. A broad-band version of the Faraday rotation circulator[7] has also been made with a bandwidth of about 10 per cent at X-band for a 30dB isolation.

The principal use of the circulator is in systems where it is required to receive power into a two terminal network from one part of a system and to transmit power to another part of the system, from the same two terminal network, without coupling the two parts of the system. A particular instance of this is the Maser amplifier when using the same termination for both input and output[8].

Similarly the circulator is used for duplexing[9] in either c.w. or pulsed systems. As is apparent from Fig. 4 it provides paths of low attenuation between the transmitter and the aerial, and between the aerial and the receiver, yet giving a high degree of isolation between the transmitter and the receiver. While the isolation due to the circulator may be between 30 and 40dB, the isolation is limited in practice by the aerial mismatch which may easily result in reflected powers greater than −20dB relative to the transmitter power. Further discussion on duplexing is included in the section on switching.

As indicated previously a circulator may be used as an isolator by terminating the two additional ports, 3 and 4 of Fig. 4, with matched loads. The power handling capacity of the circulator may then be limited more by the loads than by the circulator itself. Once again operation at high power raises the problem of change of performance, but a four port circulator of the Faraday rotation type has been made with a through-put of 100W mean at X-band. The phase shift type of circulator should be capable of handling higher powers as the problem of cooling the ferrite is simpler.

The present lower frequency limit on the circulator is in the region of 3 000Mc/s. This limitation arises not only from the difficulty of obtaining suitable ferrites but also from the problem of physical size.

Components With Varying Magnetic Fields

An extension of the application of constant magnetic field ferrite components lies in the use of varying applied magnetic fields, and the possibility of components for switching and for modulation is at once apparent. By varying the magnetic field of a resonance absorption isolator a variable attenuator results. By switching the direction of the applied field in a circulator a microwave switch is obtained. Many such components can be devised and have been described in the literature.

Components with varying magnetic fields frequently operate through low and zero applied fields and it may be important that magnetic microwave losses in the ferrite material shall still be small. It becomes necessary in these circumstances to use materials which do not exhibit low field loss. This is a function of frequency and for a given material disappears at a sufficiently high frequency. Suitable materials do exist for frequencies as low as 3 000Mc/s and therefore components may be designed for frequencies at least as low as this.

SWITCHES

Switches may be of several types, those which either transmit power or absorb it, those which transmit power or reflect it and those which change the path of transmission.

A switched resonance isolator would be of the first type and a switched circulator would be of the third type. The design of the second type can be based on Faraday rotation, but instead of the 45° angle of rotation used in the circulator 90° is used instead[10,11].

The applications of microwave switches are many and the use of switched magnetic fields enables the switching time to be many orders of magnitude less than is obtainable mechanically. The order of magnetic field required in an X-band Faraday rotation circulator is tens of oersteds, that required for resonance isolators is thousands of cersteds. It is clearly more practical to make use of the Faraday rotation effect for switching than the resonance absorption effect.

Such a switch has been made[15] for X band with a rejection of about 35dB and an insertion loss of less than 1dB. The bandwidth of the switch was only a few tens of megacycles per second but had switching times of less than 0·1μsec and could be switched at repetition rates of over 1Mc/s.

A switched circulator can clearly be used to transmit signals through alternative paths such as to one or other of a pair of aerials, or to obtain a pulse modulated signal.

THE PHASE SHIFTER

The original non-reciprocal passive element, the gyrator, is a particular case of a non-reciprocal phase shifter giving a differential phase shift of π^c. Ferrite phase shifters can be reciprocal or non-reciprocal and for a given magnetic field and size of material the differential phase change and the total phase change are functions of position. As with other ferrite components, the design is dependent upon the application and the optimum configuration for differential phase shift is not necessarily the optimum for maximum unidirectional or total phase shift.

At X-band variation in phase shift with magnetic field of the order of $2\pi^c$ per inch with insertion loss of less than 0·5dB, and differential phase changes of $\pi/2^c$ per inch with less than 0·2dB insertion loss, are obtainable.

The $\pi/2^c$ differential phase shift has been used in the design of circulators, while the larger variable phase change has been used in the tuning of cavities and for modulation.

MODULATION

Phase Modulation

The simplest form of modulation to achieve with ferrite devices is phase modulation, the phase shift through ferrite loaded guide being a function of the magnetic field. The most attractive phenomenon on which to base such a modulator is Faraday rotation as the magnetic fields required are small. One form of a phase modulator consists of a pair of identical Faraday rotation elements in cascade, but



Fig. 5. Amplitude modulator using coupled variable phase changers

having contrary directions of rotation[16]. In this way the resultant rotation is zero but the phase change is directly related to rotation recurring in each part. This technique results in phase modulation with substantially no amplitude modulation and which is sensibly linear with the applied magnetic field. The maximum modulation angle will be determined by the saturation rotation of the ferrite and the degree of non-linearity permitted. The saturation rotation is a function of the size of ferrite and may change rapidly with diameter.

Amplitude Modulation

The problem of amplitude modulation is by no means so easily solved as a variation of magnetic field results in a change of phase shift as well as other wanted effects. A resonance isolator with a varying magnetic field will give phase shift. The output from one arm of a circulator is proportional to the sine or cosine of the angle of rotation but as previously stated this is accompanied by a phase change. This unwanted phase change can be removed by a coupled phase changer, but it clearly depends on the application as to whether this added complexity can be tolerated.

An alternative arrangement is to use a pair of phase shift sections coupled by a hybrid-T, Fig. 5. Here the output is proportional to the sine or cosine of the change in phase and is not phase modulated. In both systems the modulation is non-linear with phase angle and with the applied magnetic field, so except for small modulation amplitudes correcting networks will be required.

Single Sideband Modulation

A component has been described by Cacheris[12] which is used for displacing the input frequency. This displacement is achieved by a rotating magnetic field and the dis-

placement frequency is twice the rotation frequency. As described, the component is narrow band, a few per cent at X-band, and gives a carrier and undesired sideband suppression of greater than 30dB. Frequency displacements of over 20kc/s have been reported.

Valve Tuning

The variation of phase change of a ferrite loaded section with applied magnetic field leads to the possibility of cavity tuning and thence to the tuning of microwave valves[9].

In principle the variable phase shifter takes the place of a mechanical tuner and at X-band a klystron with an 800Mc/s mechanical tuning range to half power points has been tuned over 600Mc/s with a ferrite phase shifter in similar waveguide structures. The output power in the latter condition was within 1dB of that obtained with the mechanical tuner.

The immediate advantage of ferrite tuning is the increased sweep rate over mechanical methods and the increased frequency sweep over reflector tuning. The system lends itself to the design of a rugged tunable signal source as it involves no moving parts. Care must, however, be taken to ensure that the magnetic field control system does not introduce unwanted variation.

Magnetic field control does not lend itself to modulation at high frequencies and unless the required frequency sweep is larger than is obtainable with the reflector potential, ferrite tuning does not offer any real advantage. However, for frequency modulation involving wide frequency sweep, ferrite tuning offers a useful possibility.

Automatic Gain Control

The possibility of a magnetically controlled microwave attenuator is at once of importance in microwave a.g.c. systems. This component could make use of low field loss which decreases with increasing applied magnetic field. A variation of up to 30dB without prohibitive residual attenuation has been reported. The use of a Faraday rotation or phase change system for controlling amplitude would give up to 30dB of attenuation with a residual loss of less than 0·5dB.

Aerial System

The use of ferrite rods for microwave aerial system has been described in a paper by Reggia, Spencer, Hatcher and Tompkins[16], which shows the advantage to be gained in size, over the conventional dish reflector system. They show that narrow beam-widths with low level side lobes are obtainable. The feeder system is more complex than for the conventional array but does lend itself to scanning by electrical means instead of mechanical, with the consequent possibility of very fast scanning rates.

Filters

The use of ferrites for phase changers and cavity tuning results in its use for tunable microwave filters. The filters may be non-reciprocal and contain resonant circuits which have resonance frequencies dependent upon the direction of propogation. In his paper on the subject N. C. E. Nelson[17] describes a passive duplexer, which not only has the behaviour of a circulator, but also protects the receiver from signals outside a certain frequency range. The order of magnitude of the change in the resonant frequency of an X-band cavity which he reports is a few hundred megacycles per second.

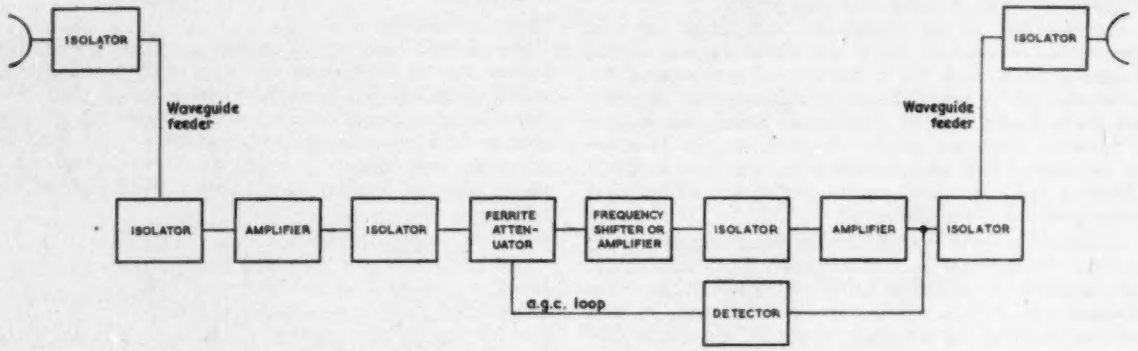

Fig. 6. Schematic of communications relay

Noise Properties of Ferrite Components

The non-reciprocal nature of some ferrite components has given rise to suggestions that the noise associated with them may be more or less than that associated with the equivalent attenuator. It may be argued on thermodynamical grounds, however, that as the component is a passive element the noise properties must be those of resistive attenuators. The non-reciprocal nature of some ferrite components does however, lead to the result that noise radiation due to the ferrite itself may be different in the two directions of propagation. This is, however, compensated by similar differences in the noise absorption.

Active Ferrite Components

The more recent developments in the field of ferrite components have resulted in the use of ferrites for amplification[8], mixing and detection[19] of microwave signals. Of these the amplifier has received the greatest attention and noise figures of 3dB at room temperature have been quoted for an X-band amplifier. This noise figure drops to 0·06dB at 4°K. The operating temperature of the amplifier extends from the lowest temperatures obtainable to several hundred degrees centigrade. The noise improvement over existing valves is clearly of importance in all fields of communication where a high sensitivity is required.

The sensitivity of the mixer and the detector is less well established, but present results are promising and indicate that further investigation should be profitable.

Conclusions

The use of ferrite components has resulted in the realization of microwave systems otherwise impossible to design, and can improve the performance of others. Ferrite components such as isolators and circulators are now well established in their use in equipment as well as in the

laboratory but the capabilities of other components have still to be fully ascertained. The limitations of these components are not well established and a full appreciation of their uses can only come through their widespread employment in microwave systems.

In principle the techniques which result from their use are not frequency dependent, but the range of available ferrites imposes limits, particularly where the material is used in an unsaturated condition.

The presently available ferrite components, isolators, circulators etc. are all passive elements but active ferrite components are being developed which give advantages over existing valves.

To illustrate the possible uses of ferrite components a microwave communication link is shown in Fig. 6.

The link includes a.g.c. using a ferrite attenuator and isolators in the aerial feeders to prevent intermodulation.

Acknowledgments

The author wishes to thank the Directors of Mullard Limited and Mr. P. E. Trier, Director of the Research Laboratories, for permission to publish this article, and Messrs. P. E. V. Allin, R. M. Godfrey, F. W. Smith and other colleagues for the benefit of numerous discussions and suggestions.

REFERENCES

1. Fox, A. G., Miller, S. E., Weiss, M. T. The Behaviour and Applications of Ferrites in the Microwave Region. *Bell Syst. Tech. J. 34*, 1 (1955).
2. Tellegen, B. D. H. The Gyrator, A New Electric Network Element. *Philips Res. Rep. 3*, 81 (1948).
3. Beljers, H. G. Non-Reciprocal Waveguide Elements using Ferrites. Nat. Lab. Report No. 3026 (1953).
4. Weisbaum, S., Seidel, H. The Field Displacement Isolator. *Bell Syst. Tech. J. 35*, 877 (1956).
5. Hogan, C. L. The Microwave Gyrator. *Bell Syst. Tech. J. 31*, 1 (1952).
6. Vartanian, P. H., Melchor, J. L., Ayres, W. P. Broadband Ferrite Microwave Isolator. *I.R.E. Convention Record 4*. Pt. 5. 79 (1956).
7. Ohm, E. A Broadband Microwave Circulator. *Trans. Inst. Radio Engrs.* MTT-4, 210 (1956).
8. Damon, R. W. Maser Shows Promise, Some Drawbacks. *Aviation Week*. P. 76 (Aug. 1957).
9. Godfrey, R. M., Humphreys, B. L., Allin, P. E. V., Mott, G. Applications of Ferrites at 3cm. Wavelength. *Proc. Instn. Elect. Engrs. 104B*. Supplement No. 6 (1957).
10. Sullivan, R. E., LeCraw, R. C. A New Type of Ferrite Microwave Switch. *J. Appl. Phys. 26*, 1282 (1955).
11. Barry, J., Clarke, W. Microwave Modulator uses Ferrite Gyrator. *Electronics 28*, 139 (May 1955).
12. Cacheris, J. Microwave Single Sideband Modulator using Ferrites. *Proc. Inst. Radio Engrs. 42*, 1242 (1954).
13. Chait, H. N. Non-reciprocal Microwave Components. *I.R.E. Convention Record*, Pt. 8. 82 (1954).
14. Jones, G. R., Cacheris, J. C., Morrison, C. A. Magnetic Tuning of Resonant Cavities and Wideband Frequency Modulation of Klystrons. *Proc. Inst. Radio Engrs. 44*, 1431 (1956).
15. Godfrey, R. M., Humphreys, B. L., Lusted, A. R. A Ferrite Duplexer for 3cm. Wavelength. Mullard Research Lab. Report No. 256.
16. Scharfman, H. Three New Ferrite Phase Shifters. *Proc. Inst. Radio Engrs. 44*, 1456 (1956).
17. Nelson, C. E. Ferrite Tunable Microwave Cavities. *Proc. Inst. Radio Engrs. 44*, 1449 (1956).
18. Reggia, F., Spencer, E. G., Hatcher, R. D., Tomkins, J. E. Ferrod Radiator System. *I.R.E. Convention Record. 4*, Pt. 1. 213 (1956).
19. Jaffe, D., Cacheris, J. C., Karayianis, N. Ferrite Microwave Detector. *Proc. Inst. Radio Engrs. 46* 594 (1958).

U.H.F. Power Meter for Operation in the 2 000Mc/s Communication Band

By J. K. Murray*

In order to assess the performance of circuits operating at frequencies above, say 1 000Mc/s it is often more convenient to measure r.f. power than to attempt to measure voltage or current in a direct manner. Such circuits, of necessity, involve the use of mechanical assemblies within which the voltage and current distribution cannot readily be ascertained. This article describes some of the problems encountered in the design of a direct-reading r.f. power meter for use in the frequency range 1 700 to 2 300Mc/s.

THE design project called for a direct-reading r.f. power meter having three sensitivity ranges, 0 to 1mW, 0 to 1W, and 0 to 20W, for use in the frequency band 1 700Mc/s to 2 300Mc/s. After due consideration it was decided to employ a semi-absolute method of power measurement in which the r.f. power would be dissipated directly in a temperature-sensitive element forming one arm of a bridge. This method, utilizing the bolometer principle, offered the choice of three possible alternatives —a lamp, a barretter, or a thermistor.

The use of a lamp did not receive more than fleeting consideration, because such a device only operates satisfactorily from about 1W upwards. This led to more serious consideration of barretters and thermistors.

Barretters have a positive temperature coefficient of resistance and, in the interests of quick response and sensitivity, employ very fine wire in their construction. These two factors tend to render the barretter very susceptible to overload burn out. In addition the barretters under consideration had to be biased to offer a resistance of not less than 200Ω; this presented a problem of impedance matching in order to terminate a 50Ω line correctly. Four such barretters could have been used for this purpose, but this introduced further problems in the form of greatly increased shunt

The Marconi u.h.f. power meter type TF 1202 together with the 1W and 20W range extension units. The thermistor head is shown removed from its case.

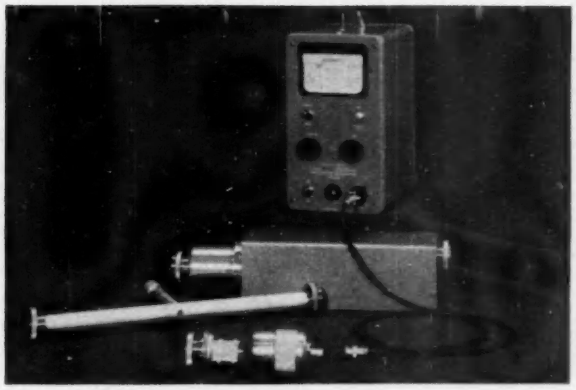

* *Marconi Instruments Ltd.*

capacitance and the possible necessity for tuning controls.

Attention was eventually turned to the possibility of using thermistors. From the outset the prospects looked favourable. The likelihood of overload burn out is greatly reduced due to such devices possessing a negative temperature coefficient of resistance. Under overload conditions the resistance of the thermistor drops to such a low value that, provided the indicating meter is suitably protected,

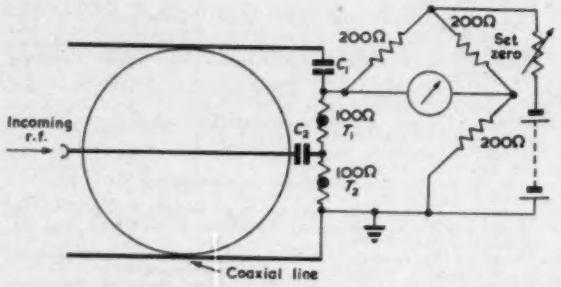

Fig. 1. The basic thermistor head, in which two thermistors are connected in series so far as the bridge is concerned, but effectively in parallel to r.f.

the resulting mis-match tends to restrict the thermistor overload to a relatively safe value. In the interests of quick response it was essential to choose a type of thermistor having very small mass. The type chosen had a 'bead' diameter of approximately 0·01in. Further, these thermistors could be biased to offer a resistance of 100Ω, so that two of them in parallel would form a satisfactory impedance match to a 50Ω line.

Fig. 1 shows the basic idea of a 50Ω coaxial thermistor head in which two thermistors are connected in series, so far as the d.c. bridge is concerned, but effectively in parallel to r.f. When using this system, d.c. bias is applied to the series-connected thermistors and adjusted, by means of a 'set-zero' control, until the bridge is balanced. When this state is achieved the two thermistors have a total series resistance of 200Ω and, from an r.f. point of view, form a terminating load of 50Ω.

Ideally, a balanced bridge would enable the thermistors to offer a constant 50Ω terminating load regardless of the r.f. power being measured. A 'slide-back' system using a calibrated meter-zero control would form a satisfactory solution. Use of this system was precluded, however, by the requirements for a direct-reading power meter.

Experiments with unbalanced bridges indicated that a resistance change from 100Ω to about 88Ω could be expected with the average thermistor for a power increase of 1mW. In the envisaged circuit, this would entail the 50Ω line being correctly terminated, when no r.f. power was being measured, and mis-matched, due to the load resistance falling to 44Ω, when maximum r.f. power was applied. This degree of mismatch was regarded as tolerable but led to further thoughts of a tapered coaxial section forming a correct match to a 47Ω load; in this case a near-perfect termination would be achieved when an r.f. power of 0·5mW was applied, and the mismatch at an r.f. power level of 1mW would be halved.

Practical considerations of mechanical layout led to the conclusion that, although the thermistors were satisfactorily small, there was going to be considerable difficulty in connecting the hair-like lead-out wires without introducing a large amount of unwanted inductance. This, together with a similar problem concerning the inductance associated with capacitor C_1, was overcome by dividing the coaxial outer longitudinally and, from a d.c. point of view, isolating the two halves from each other. These two halves, together with the coaxial inner conductor, taper to very small physical dimensions while still retaining a constant characteristic impedance—this taper may also be modified to offer a characteristic impedance of 47Ω at the load-end of the taper, as already discussed.

Thermistor Head

Fig. 2 shows the theoretical circuit of the final thermistor head, while Fig. 3 shows a cutaway view of its practical construction.

As illustrated in Fig. 3, the tapered outer part of the coaxial line is attached to the outer part of the input socket by means of screws passing through an aluminium washer. This washer is anodized on one surface only. The anodized surface faces the tapered section so that it forms an annular capacitor between the tapered section and the input socket

Fig. 2. Theoretical circuit of the final thermistor head

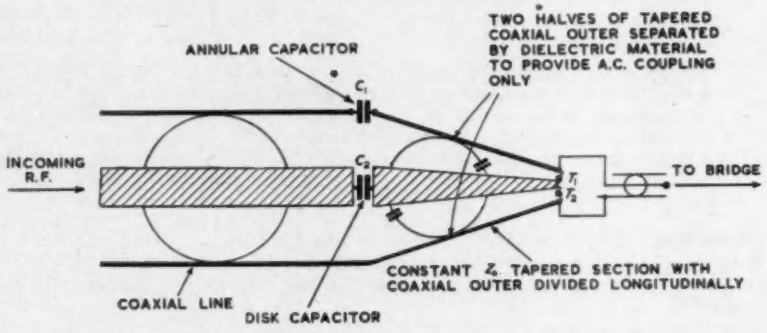

Fig. 3. The practical construction of the thermistor head

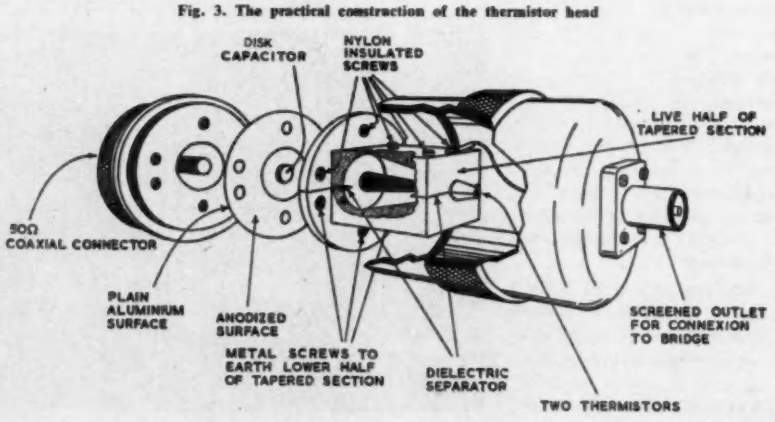

—the aluminium oxide forming the dielectric. Nylon screws are used to secure the upper half of the tapered section to the input socket while the lower half is attached with ordinary metallic screws. In this way, a capacitor, having very low residual inductance, is created between the upper half of the tapered section and the input socket, while the lower half is directly connected and therefore at earth potential.

The space between the inner and outer sections of the coaxial assembly is occupied by a solid dielectric of p.t.f.e. which, quite apart from its electrical properties, ensures that concentricity is maintained during mechanical assembly. The thermistor mount is contained within a machined metal cover so that the whole head assembly is effectively screened both electrically, and against sudden changes in ambient temperature.

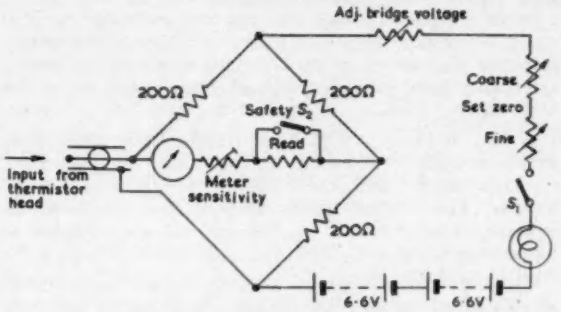

Fig. 4. Theoretical circuit of the bridge unit

Connexion from the bridge to the thermistor head is made via a conventional screened socket, the live part of this socket being internally connected to the upper part of the coaxial tapered section.

Bridge Unit

Fig. 4 shows the theoretical circuit of the complete bridge unit. This part of the instrument follows conventional lines and needs very little comment.

The two dry batteries supplying the bridge are housed within the meter case. In the interests of reliability these batteries are of the mercury variety, each delivering approximately 6·6V and possessing a total capacity of 3·4Ah.

A low-voltage bulb, in series with the battery supply, serves the dual purpose of acting as a pilot light and of providing a measure of current stabilization.

'Coarse' and 'fine' set-zero controls are provided for balancing the bridge while an additional preset control, 'adj. bridge volts', enables the instrument to be adjusted so that balance is achieved with the 'coarse' control at approximately mid-position throughout the life of the batteries.

During initial calibration the sensitivity of the meter is adjusted, by means of an internally-situated preset control, to give full-scale deflexion for an r.f. input of 1mW. When setting up this control, and for all subsequent r.f. measurements, switch S_2 is closed to the 'read' position. This switch is a biased toggle switch, and is normally in the open position so that a series resistor lowers the meter sensitivity and provides protection against accidental overload; this feature is particularly useful when the bridge is first being brought to a state of balance.

1-Watt Range Extension Unit

An add-on coaxial attenuator had to be designed for the measurement of r.f. power in the range 1mW to 1W. This presented certain problems before a really satisfactory unit for insertion between the source of r.f. power and the thermistor head was produced (Fig. 5).

The unit consists of a rigid coaxial line, some 15in in length, at the mid-point of which a coaxial stub-line is situated. The free end of the stub-line is short-circuited by means of a piston; the position of this piston is adjustable by means of a micrometer screw, thus providing a means of altering the effective length of the stub-line. The centre conductor of the main coaxial section is loaded with dust-iron material to introduce the required attenuation.

To provide reflection-free absorption of the r.f. energy, special precautions are taken over the construction of the centre conductor. The carefully-graded dust-iron material is arranged to offer the maximum absorption in the proximity of the stub-line, while the outer ends are gradually tapered to provide a smooth transition between the loaded and unloaded parts of the coaxial assembly.

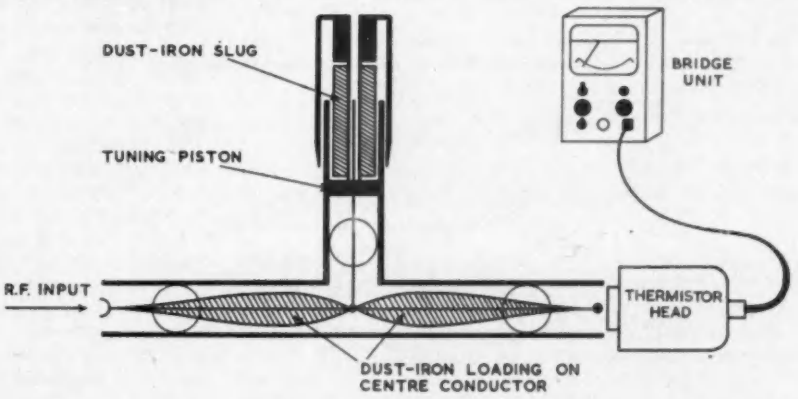

Fig. 5. Theoretical representation of the 1W range extension unit

The attenuation resulting from a loaded centre conductor of this type, varies with frequency. This is overcome by varying the position of the piston, and thus the admittance at the centre of the attenuating section. In this manner exact adjustment of the attenuation is achieved at any frequency within the band 1 700 to 2 300Mc/s. With each

instrument the micrometer screw, controlling the position of the piston, is individually calibrated in frequency. The possibility of calibration inaccuracy, due to unintentional r.f. leakage past the piston, is minimized by a large dust-iron slug situated between the piston and the calibrated adjusting spindle.

20-Watt Range Extension Unit

The principle utilized in the design of the 1W range extension unit could not be satisfactorily applied in the case of the 20W unit—mainly due to considerations of physical size. The problem was therefore tackled in a different manner.

A unit was designed within which a high-dissipation resistor provides a 50Ω coaxial termination. A minute fraction (1/20 000) of the total power dissipated in this load is used to energize the thermistor head.

When designing the terminating load, use was made of the fact that, in a coaxial transmission line having a linearly resistive centre conductor with a total resistance equal to Z_o, a near-perfect termination may be obtained by tapering



Fig. 6. Illustrating the principle of a 50Ω coaxial termination

the outer conductor in quasi-exponential fashion so as to join the inner conductor at the end remote from the source. When using this system, however, it is important that the dimensions of the coaxial line at the input end of the load resistor should be equivalent to Z_o. This requirement tended to conflict with the idea of using a large diameter resistor in order to dissipate the required 20W. The solution to this problem takes the form of a constant-impedance tapered section to increase the physical dimensions of the coaxial line to correspond with the dictates of resistor diameter.

Fig. 6 shows, in much simplified form, the construction of a terminating load using this principle. The heavy-duty, high stability, resistor employed has a tubular ceramic former with a conducting outer coating of cracked carbon. Provided the outer conductor is tapered in the correct manner, such a device presents a remarkably pure input impedance over a very wide frequency range—the necessity for tuning controls being completely eliminated.

The basic construction of a terminating load having been settled, the next problem involved methods of 'tapping off' a small proportion of the energy in order to operate the power meter. It was also necessary, at this stage, to consider ways and means of adjusting the output level, so that an exact 1mW would be available for the thermistor head when 20W was being dissipated in the main load.

A 'tapping clip' on the load resistor, quite apart from its inaccessibility for adjustment purposes, was out of the question on the grounds of having to maintain a good v.s.w.r. The method finally adopted was simple in the extreme; it consisted of a probe inserted, to a greater or lesser degree, up the hollow centre of the 20W load.

Although this method of coupling seemed highly desirable, it failed to meet one requirement—that of matching the 50Ω thermistor head. In the final design, therefore, the probe itself is made of resistive material, and a three-foot length of lossy coaxial cable is interposed between the probe and thermistor head. This, of course, necessitates slightly increased coupling between the probe and the r.f. load resistor, in order to offset the attenuation due to the cable. However, the vast improvement in v.s.w.r., attendant upon using the lossy cable, completely outweighs the very slight disadvantages of using increased coupling.

As a matter of experience, rather than design, the lossy cable employed in the instrument has a characteristic impedance of 75Ω. To match this cable to the 50Ω thermistor head, a quarter-wave, 75/50Ω, coaxial transformer forms part of the outlet socket. The non-availability of suitable 50Ω lossy cable was entirely responsible for this arrangement and, because of this, these particulars are not included in the final diagram (Fig. 7).

Fig. 7. Theoretical representation of the 20-Watt range extension unit

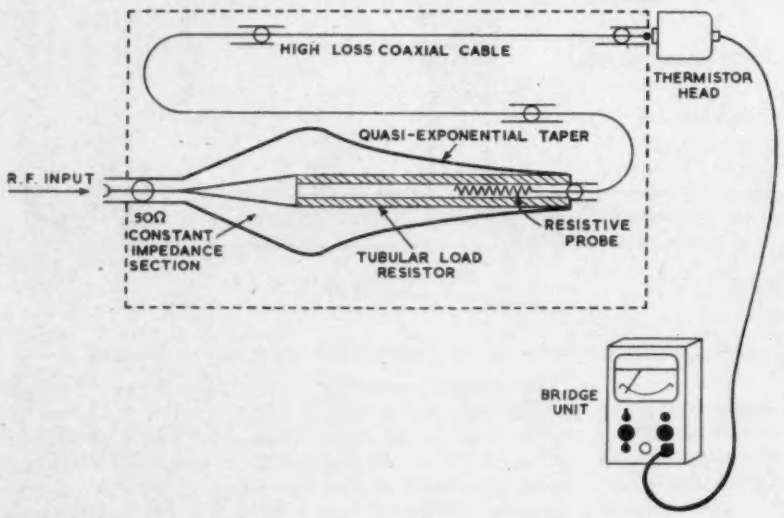

Performance

The complete equipment meets the original specification requirements for an instrument to indicate mean r.f. power in the frequency band 1 700 to 2 300Mc/s with an accuracy of ±5 per cent of full scale deflexion on a direct-reading meter. The instrument is completely independent of external power supplies—apart from the power being measured—and, using the accessories described, the basic range of 0 to 1mW can be extended to measure powers of 0 to 1W and 0 to 20W. Lastly, under all conditions of measurement, the input impedance is 500Ω with a v.s.w.r. of better than 1·2:1.

Acknowledgment

The author wishes to record his thanks to the Management of Marconi Instruments Ltd. for permission to publish the details of the instrument described.

The White-Noise Method of Measuring Crosstalk and Noise Interference in Multi-Channel Telephone Link Systems

By J. F. Golding *

This article deals with a method, originally developed by the Post Office[1], of obtaining a realistic measure of noise and intermodulation products in multi-channel telephone-link systems. The use of a noise signal permits the simulation of full-traffic load conditions for the test. The Marconi white noise test set, an example of a commercially available equipment for this type of measurement, is also described.

Most of the noise and interference produced in multi-channel systems using frequency-division multiplexing is caused in two ways. The first and obvious cause is the noise energy generated in components of the link system itself. The second is intermodulation between channels due to various types of distortion in the system.

A wideband telephone system normally carries between 60 and 600 channels, each channel being formed by a single sideband of a carrier spaced 4kc/s from that of the adjacent channel. The sideband occupies a bandwidth of 3kc/s with 1kc/s separation from the next channel. The channel is, however, normally regarded as occupying the full 4kc/s. Originally, this type of transmission was passed through land lines; and non-linear distortion was the predominant cause of intermodulation. The crosstalk so produced normally becomes audible to the subscriber as an interference resembling random noise.

Providing the intermodulation is produced almost entirely by non-linear distortion, a fairly satisfactory measure of the relative noise and intermodulation products can be obtained by:—

(1) Applying a single-frequency tone and measuring both the harmonic distortion and the signal-to-noise ratio in a 4kc/s bandwidth.

(2) Applying two tones simultaneously and measuring the cross modulation between them.

From the practice of using these two methods, a more or less standard way of evaluating this aspect of the performance of these transmission systems has arisen; viz., the ratio between unwanted noise and test-tone level in a 4kc/s channel.

These methods do not, however, provide a realistic simulation of conditions during full-traffic periods of the systems. They are, indeed, particularly unsatisfactory when applied to radio links, which employ frequency or phase modulation almost exclusively. With these types of transmission low-level crosstalk is produced, not only by non-linear distortion, but also by what is known as delay distortion. This is selective phase distortion, whereby some of the frequency components of the transmitted signal are delayed relative to others. Thus the multiple sidebands of the frequency- or phase-modulated signal reach the receiver in the wrong relative phase. Delay distortion can be caused by reflection in transmission lines and waveguides. The intermodulation so produced adds to that caused by harmonic distortion and to the noise signals generated in the system and thus raises the interference level in the final output signal.

The white noise method of measuring the interference suppression automatically takes all these factors into account and gives, as a measured result, a noise-power ratio figure which can either be used directly as a measure of the relative freedom from interference or converted to the more familiar ratio already mentioned by the application of a specified factor.

* *Marconi Instruments Ltd.*

To carry out the test a band of random noise, derived from a special generator, is injected at the input of the transmission system in place of the multi-channel traffic signal. The bandwidth of this noise signal is equal to that of the base-band frequency range of the traffic signal—i.e., the total frequency range of the number of channels carried; and the mean level of noise energy is adjusted to be approximately equal to the signal level exceeded during one per cent of the busy hour.

The noise energy is passed through a number of band-stop filters which produce 'holes' or quiet channels in the output frequency characteristic of the noise generator.

The output from the receiving end of the link system is fed to a noise receiver, having a narrow acceptance band whose centre frequency can be adjusted to coincide with the centre frequency of any one of the band-stop filters in the noise generator. With the receiver set to the centre frequency of a particular filter, the output from the link system is measured with the filter in and out of circuit, and the ratio between the two output levels measured is expressed in decibels.

The figure obtained as a result of this test is known as the noise-power ratio of the system. To convert it to the ratio of test-tone level to unwanted noise in a 4kc/s channel, the factor obtained from the following expression should be applied:—

$$R = \left(P - 10 \log \frac{A}{4} \right) \text{dB}$$

Where R is the conversion factor

P is the multi-channel signal power exceeded for 1 per cent of the busiest hour, measured at a zero-level point in the system expressed in dBm

A is the bandwidth of the multi-channel signal in kc/s.

This factor is expressed in decibels and should, therefore, be added to the noise-power ratio obtained by the measurement.

The Test Set

The following description of the arrangement of the Marconi white noise test set type OA1249 will serve to illustrate in more detail a practical application of the method of test. The basic arrangement of the equipment is shown in Fig. 1 as a block schematic diagram. From this diagram it can be seen that the test set comprises two main units—the noise generator and the noise receiver.

The Noise Generator

The noise signal originates from a noise diode. This type of noise source produces a band of random noise considerably wider than the base-band frequency range of the types of link equipment for which the test set is intended. It operates in a conventional circuit, in which the anode is held at a positive

potential with respect to the cathode in order to ensure that all the electrons leaving the cathode reach the anode. The level of noise voltage developed across the diode load is directly proportion al to the d.c. diode current, which is, in turn, proportional to cathode temperature. This is controlled by a variable resistor in series with the d.c. filament supply.

The noise signal from the diode is applied to the input of a wideband amplifier. This is the first of a pair of amplifiers and may be called the low-level amplifier for the sake of convenience. It comprises four *RC* coupled stages in cascade feeding a cathode-follower output valve. Correction of the response to the higher frequencies within the band is effected by the use of an *LC* circuit in series with the anode loads of the amplifier valves. The cathode-follower output valve delivers the noise signal from a low source-impedance to match the filter circuits that follow the amplifier.

The noise signal from the cathode-follower is fed, via a capacitive coupling, to a high-pass filter having a cut-off frequency of 60kc/s. It is then passed through a low-pass filter having a cut-off frequency of 2·54Mc/s. The combined effect of these two filters is the production of a noise bandwidth extending from 60kc/s to 2·54Mc/s.

By the use of plug and socket connexions, the output signal from the second of these filters can either be fed directly to the input of the second wideband amplifier or one of three additional low-pass filters can be introduced. The frequencies of these additional filters are (1) 1·052Mc/s giving a noise bandwidth corresponding to a 240 channel base-band, (2) 522kc/s, corresponding to a 120 channel base-band, and (3) 300kc/s, corresponding to a 60 channel base-band.

The second—high-level—amplifier comprises three *RC* coupled voltage amplifying stages feeding a transformer-coupled output stage. A single loop of negative feedback from the output stage to the second amplifying stage carries an *RC* network which provides part of the necessary frequency-response correction. There is also a preset variable inductor, in series with the anode load of the output valve, and this provides the additional correction required.

The output from the high-level amplifier is passed through a network of switches and band-stop filters, so arranged that the noise signal can be passed through one or more filter or fed directly to an output attenuator. There is a separate switch for each filter.

The centre frequencies of the stop-bands of these filters are 70kc/s, 290kc/s, 534kc/s, 1 002kc/s, and 2 438kc/s respectively. Each stop-band is 4kc/s wide and introduces a loss of 80dB over this range. The switches are of rather a specialized nature, with earthed contacts acting as screens. This refinement is necessary in order to avoid capacitive coupling across the switch to a degree which may seriously reduce the 80dB insertion loss introduced by the filter.

The noise signal from the filter network is fed to the coaxial outlet via a 75Ω attenuator whose insertion loss is variable in 0·5dB steps over the range 0 to 61·5dB. The input to this attenuator is monitored by a diode voltmeter—comprising a moving-coil meter and two germanium diodes—which is calibrated in arbitrary noise units.

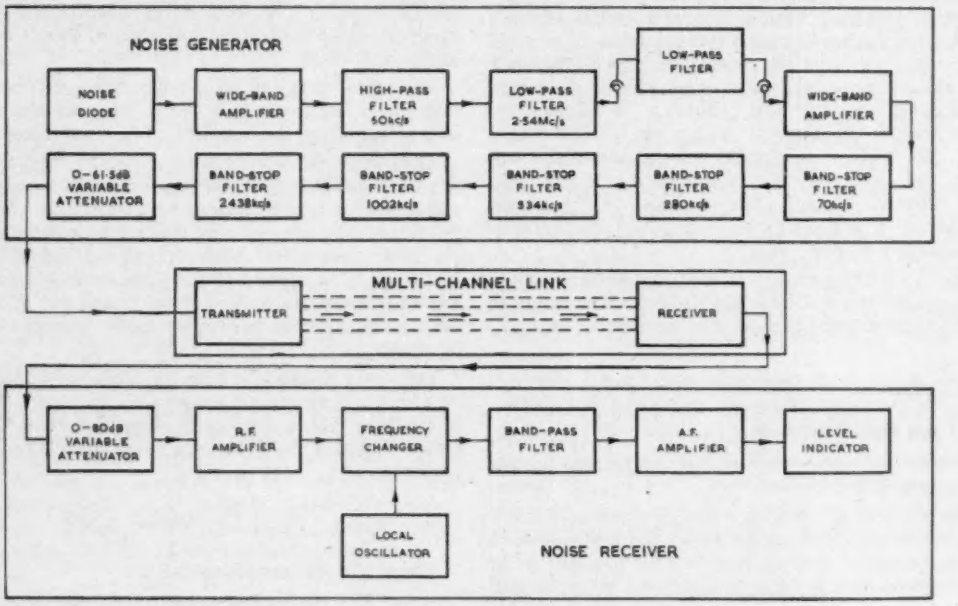

Fig. 1. Block schematic diagram of Marconi white-noise test set

When the test set is in use, the noise output is adjusted by means of the diode current control, to deflect the meter to a predetermined reference indication. With zero attenuation, the mean noise output is then 15dBm for the 600 channel bandwidth, 12dBm for the 240 channel bandwidth and 10·5dBm for the 120 channel bandwidth. The output attenuator may be adjusted to produce a final mean noise level which is equivalent to the input level at full-traffic load on the link system.

The general form of the noise output characteristic is shown in Fig. 2. With all band-stop filters switched out of circuit, the characteristics is as shown in Fig. 2(a). The introduction of the filters modifies the characteristic to that shown in Fig. 2(b), for one filter in circuit, or Fig. 2(c) for all the filters in circuit.

The Noise Receiver

The narrow bandwidth and low internal noise, which are mandatory to the successful operation of the receiver, have necessitated the use of a somewhat unorthodox design.

The signal from the equipment under test enters the receiver via a 75Ω attenuator which is variable in steps of 0·5dB over a range 0 to 80dB. This attenuator plays an important part in the slideback method of measuring noise-power ratio.

From the attenuator, the noise signal goes to an over-coupled band-pass filter having a very steep-sided response with a certain amount of double-humping. This filter forms the grid circuit of the pentode input stage of the receiver. The tuned anode load of this valve has a very narrow bandwidth and, since it resonates at the centre frequency of the filter, the combined effect is one of producing an extremely well defined input-stage pass-band with an attenuation of off-tune signals exceeding 80dB. There are five input-filter/anode-load pairs selected by means of a frequency-selector switch, their centre frequencies corresponding to those of the five band-stop filters in the noise generator.

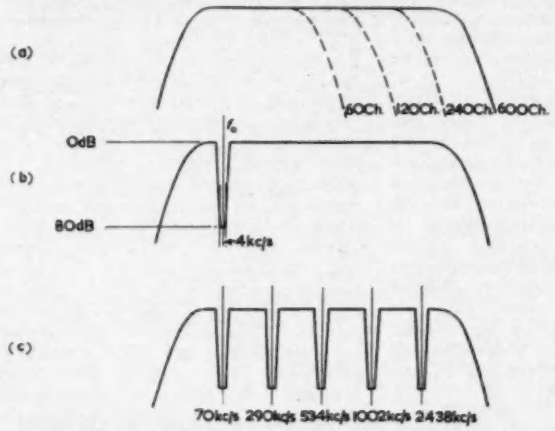

Fig. 2. The form of the noise-output characteristic of the noise generator
(a) With no bandstop filters in circuit
(b) With one bandstop filter in circuit
(c) With all the bandstop filters in circuit

The input stage is followed by a frequency changer comprising a hexode mixer and a separate oscillator. This oscillator's tuning inductor is selected by means of a wafer on the frequency-selected switch. The frequency of the oscillator coincides with the centre frequency of the input-stage pass-band; and the output of the mixer is therefore composed of both the upper and lower sidebands which add together over a frequency band covering from zero to about 1·2kc/s. However, the noise power from the mixer is equivalent to that contained in the total bandwidth of the input stage, which is, of course, twice that of the mixer output.

This output then passes through a low-frequency band-pass filter having a pass-band of 200 to 800c/s. It is this filter that finally determines the acceptance band of the receiver; and, because the signal passing through it is the sum of the upper and lower sidebands of the local-oscillator 'carrier', its 800c/s upper cut-off frequency produces an overall receiver bandwidth of 1·6kc/s. This is well within the '80dB' bandwidth of the bandstop filters in the noise generator, so that, for any given setting of the frequency-selector switch, the receiver's response can be regarded as 'fitting into' the stop-band of the appropriate filter in the noise generator. The lower cut-off frequency (200c/s) of the receiver's low-frequency filter produces a 400c/s gap in the middle of the overall response characteristic, so that the amount of noise energy actually reaching the l.f. stages which follow is equivalent to that contained in a noise bandwidth of 1·2kc/s.

This noise signal is amplified by means of a high-gain l.f. amplifier and applied to a diode voltmeter. The l.f. amplifier provides almost the whole of the receiver gain—some 80dB. The gain of the input stage is deliberately kept low because a high level of input to the mixer may produce spurious noise and cause errors in the final measurement.

Measurement of Noise-power Ratio

The method of using the white noise test set is simplified by the fixed alignment of the receiver frequency with the stop-band of each quiet-channel filter in the noise generator.

The output of the noise generator is applied to the input of the system under test, the noise generator's output band and level having been previously set up as described earlier in this article, and the noise output of the system is fed to the receiver.

The quiet-channel frequency at which the test is to be made is then decided, and the receiver's frequency-selector switch is set accordingly. The appropriate band-stop filter is switched into circuit at the noise generator and, with the receiver's input attenuator set to zero insertion loss, the



Fig. 3. Two white-noise test sets in use with two-way link system. Noise generator A is associated with noise receiver A, and noise generator B with noise receiver B

receiver gain is adjusted for a convenient reading on the panel meter. The bandstop filter is then switched out of circuit, and the receiver's input attenuator is adjusted to return the meter pointer to the same reading.

The noise-power ratio is then indicated directly in decibels by the setting of the input attenuator.

The Practical Installation

When this type of test set is used in connexion with a transmission system which is in operational use, the noise generator and its associated receiver are inevitably separated by some considerable distance. The test procedure, in these circumstances, must necessarily be carried out by two operators having some means of communication between them.

Normally, a telephone-link system is two way, and the arrangement shown in Fig. 3 may be used. This diagram is self explanatory regarding electrical arrangement. Noise generator *A* is associated with receiver *A*, and noise generator *B* with receiver *B*. Where the test equipment forms part of the permanent installation, generator *A* and receiver *B* would probably be mounted in a rack together at one terminal station, with generator *B* and receiver *A* assembled similarly at the other.

The test equipment is, however, aiso used on radio link equipment at factories and stores, with the receiving terminal separated from the transmitter by only a short physical distance. A complete white noise test set comprising the noise generator and its associated noise receiver may then form a single rack-mounted assembly.

Acknowledgment

The author wishes to thank the Management of Marconi Instruments Ltd for permission to publish details of Marconi equipment and for the use of photographic facilities in producing this article.

REFERENCE

1. Equipment for measurement of non-linear distortion and noise on 120, 240, or 600 channel systems. P.O. Engineering Department Radio Report No. 2339.

BOOK REVIEWS

Transistor Electronics

By David Dewitt and Arthur L. Rossoff. 381 pp. 80 figs. Demy 8vo. McGraw-Hill Publishing Co. Ltd. 1957. Price 60s.

TO cover the ground between the structure of the atom and the design of transistor amplifier and switching circuits in less than 400 clearly-printed pages requires a certain amount of condensation. It is no reflection on the authors that this is achieved by a lack of rigour and occasional superficiality. This book is intended as an introduction to transistors for the electronic engineer; for those who require a deeper treatment of particular points there is an adequate bibliography.

The main topics are: the Bohr Atom; quantum mechanics and the semiconductor; the pn junction; the transistor; the small-signal equivalent circuit; d.c. conditions and stabilization; the audio power amplifier; general amplifier circuits, feedback (but with little discussion of feedback problems peculiar to transistor amplifiers), and the use of matrices; high frequency amplification; large-signal transient response and switching; mixers and demodulators; radio receivers; other transistor types, including an analysis of the drift transistor; and transistor noise. A feature of the book is that the mathematics, of which there is necessarily a large amount, is from first to last illuminated by constant reference to practice and to fundamental physical processes. As a further aid to comprehension some problems on the content of each chapter are given at the end of the book. The appendices give the physical properties of germanium and silicon, the values of some physical constants, and matrix and determinant interrelations. A list of symbols would have been useful, and might have helped to avoid some minor lapses.

The diagrams are sometimes rather small but always clear, and are placed appropriately in the text. Printing errors are few. The book is American, but peculiarly so only in the circuit symbols used and occasionally the grammar and terminology (e.g. one-shot multivibrator); there is no loss of clarity.

The number of books on transistors is growing rapidly; it seems unfortunate, but is perhaps symptomatic, that the authors chose a title which has been used before. However, this book is undoubtedly among the best of its kind; by its nature it will not date rapidly; and both the student and the practicing engineer who wishes to refresh his memory or seeks an introduction to some unfamiliar aspect of transistors will find it of great value.

F. HIBBERD.

L'Automatique des Informations

By F. H. Raymond. 188 pp. 51 figs. Demy 8vo. Masson & Cie, Paris. 1957. Price Fr.1 600

"L'Automatique des Informations" deals chiefly with the digital computer. It is, however, not with electrical and mechanical details, nor with mathematics, that the author concerns himself. His emphasis is on fundamental notions—the representation of numerals in various coded forms each having their different merits, logical combination theory, the basic capabilities that a computer must have, and the manner in which it can be programmed.

These topics are minutely explored, classified, illuminated. At times the approach strikes one as tedious, but in general one is grateful to the author for having called a halt, as it were, in a rapidly-growing field and devoted so much patience to a loving exposition of its foundations. An introductory tribute speaks of the pages as "dénudant le corps et l'âme d'une calculatrice." It is an apt comment and, for those who are employed in programming or in computer design, this sifting of the essentials may well throw a refreshing light on concepts grown over-familiar.

The book includes a chapter on analogue techniques. It also gives a thoughtful survey of the field of automata in general and of the history of their development - governors, servo mechanisms, and data-handling and computing devices.

T. L. CRAVEN.

Technology of Instrumentation

By E. B. Pearson. 202 pp. 95 figs. Demy 8vo. English Universities Press Ltd. 1957. Price 25s.

SUCH a wide subject as the title imputes cannot be covered in two hundred pages. In the General Editor's Foreword it is stated that the book sets out to answer the problem—how to design an instrument which will measure . . . ., but the author refers to automatic control, computing and dynamic measurements of time-variant quantities . . . ., a much more limited scope. The book really deals primarily with the theory of servo-mechanisms for position control, which it does very thoroughly: it may prove to be a reference work as well as a text-book. Theory is predominant, with little reference to instruments in general use; for example some of the principles of selsyns and magslips are given, but neither name is quoted, Readers looking for design information on electrical measuring instruments, for example, will find nothing on the electrical side, but an excellent theoretical treatment of torque, damping, natural frequency, etc. Feedback, both mechanical and electrical is very fully treated mathematically and there is an introduuction to ways by which some simple mathematical operations can be performed by inanimate devices, such as differentiation and integration, and including an outline of analogue computers. The terminology is mainly correct, but the author's physics training is obvious. In some instances it is difficult to decide if 'capacity' is meant for physical capacity or is a mistake for capacitance. Within its actual scope the book is very good.

E. H. W. BANNER

Mechanical Resolution of Linguistic Problems

By A. D. Booth, L. Brandwood and J. P. Cleave. 306 pp. 19 figs. Demy 8vo. Academic Press, Inc., New York. Butterworths Scientific Publications, London. 1958. Price 50s.

IT is only twelve years since the use of a machine to translate one language to another was first suggested. Today one has the impression that ambiguity of word-meaning is the only problem that still presents serious difficulties. It seems fairly certain that all problems of syntax can be made amenable to handling by computer and that, at least if the subject matter be restricted to a given field, the finished translation can be of such a standard as to require little or no editing after it emerges from the machine. The syntactical rules devised for the machine are often artificial—utility, we are told, is their only criterion. It must be remembered, though, that even in the spontaneous development of a language it is utility that is the unconscious guide.

Mechanical Resolution of Linguistic Problems is an account of some of the results which have been obtained at Birkbeck College Computational Laboratory on the application of digital computers to translation and some other linguistic problems.

The early pages give a historical review, and then proceed to outline the general principles of data-processing machinery, including the APEXC computer used at the college. One feels that the operation of this computer should have been explained more clearly in view of the extent to which an ability to understand its programmes is necessary in reading some later parts of the book. In particular, the table of computer orders seems as if taken in its entirety from some other source, and could with advantage have been made more explicit. The reader must deduce for himself that the third column, mysteriously headed "C_s", refers (or so your reviewer believes) to the setting of the counter. For that matter, it is only the first and the last of the five columns that appear to be necessary to the reader.

Two interesting chapters deal with the use of computers in literary research. To take an example, it appears that an author's works, of dates unknown, can sometimes be tentatively arranged in chronological order by noting a changing

trend in the use of certain words or certain sentence structures. The discovery of such trends demands an enormous amount of counting and sorting, and for this a computer is invaluable.

There follows a clear exposition of the approach to the basic problems of machine translation—the arrangement of the dictionary and the dictionary-search procedure, recognition of stems and endings and the correct interpretation of the latter, word-order re-arrangement, idioms, and the resolution of ambiguities. Then come some accounts of investigations into machine translations of specific languages.

These accounts, which form the greater part of the book, exhibit an unfortunate variation of approach and size of the chapters. The different approaches are understandable—one reason is that the scope of the investigations has varied—but, as to size, the reader must be warned that no less than 162 of the 306 pages in this book are given to one sole chapter which presents some of the main problems to be faced in the machine translation of German. There is, in consequence, a lack of balance. One feels that one has been reading the laboratory reports available to date. And yet that, perhaps, is a very good thing—there has been so little published on this subject, and things are moving fast.

T. L. CRAVEN.

Elements of Tape Recorder Circuits

By H. Burstein and H. C. Pollak. 223 pp. 60 figs. Demy 8vo...Gernsback Library Inc. 1957. Price $2·90 paper cover, $5 hard cover.

THIS book is written for both the audiophile and technician. Basic design principles, with a minimum of arithmetic, are included so that the reader may modify his own equipment to suit his particular needs.

The various chapters are concerned with the electronic functions of the tape recorder, why these functions are called for and the means of performing them. The fundamental problems of frequency response, distortion and noise are dealt with in terms of design and of extracting optimum performance from a given recorder. Requirements for high quality performance are given and basic circuitry is described and evaluated.

Electronic Engineer's Reference Book

Edited by L. E. C. Hughes. 1 303 pp. 800 figs. Demy 8vo. Heywood & Co. Ltd. 1958. Price 84s.

AFTER the preliminary pages which include two articles on the history of electronics, the body of the text has been divided into nine main parts: Fundamentals, Radiations, Electrics, Valves, Materials, Vibrations, Computers, Automatics, and Miscellaneous.

This reference book endeavours to put before engineers in industry and in development laboratories some of the latest knowledge and techniques.

Nuclear Energy in Industry

By J. G. Crowther. 168 pp. 98 figs. Demy 8vo. George Newnes Ltd. 1957. Price 17s. 6d.

THIS book is the outcome of the author's attendance at the International Conference on the Peaceful Uses of Atomic Energy held in Geneva in 1956. It tells the story of development culminating in the building of nuclear power stations in this country and overseas, and describes the role of the radioisotope in industry and its effect on techniques and processes. The book makes interesting reading for the layman and is recommended for those interested in the future of industry.

Control Engineering Manual

Edited by B. K. Ledgerwood. 188 pp. 80 figs. Royal 4to. McGraw Hill Publishing Co. Ltd., New York and London. 1957. Price 56s. 6d.

THIS manual consists of articles that have appeared in Control Engineering. It deals with specification of control systems, synthesis of control systems, evaluating control systems, generating control functions, design techniques, analogue computers, non-linearity in control systems, etc.

Electronic Designer's Handbook

By R. W. Landee, D. C. Davis and A. P. Albrecht. 800 pp. 80 figs. Royal 8vo. McGraw-Hill Publishing Co. Ltd, New York and London. 1957. Price £6 8s.

THIS handbook gives fundamentals and data to aid in the design of various types of electronic equipment. A large number of the circuits used by engineers is covered, with theoretical and technical discussions and explanations, design examples to show application of theory, and graphical and tabular data needed in day-to-day design work.

There are twenty-three sections ranging from vacuum tube fundamentals and voltage and power amplifiers to such topics as computer and servomechanism techniques and waveform and network analysis.

Installing Electronic Data Processing Systems

By R. G. Canning. 190 pp. 40 figs. John Wiley & Sons, Inc., New York. Chapman & Hall Ltd, London. 1957. Price 48s.

THIS book deals with the high-cost aspects of installing electronic data processing systems, training of personnel, programming, physical installation of the system, and the early phases of operation. It is written in non-technical language and assumes that the reader is relatively unacquainted with electronic computers.

Frequency-Modulated Radio

By K. R. Sturley. 120 pp. 40 figs. Demy 8vo. 2nd edition. George Newnes Ltd. 1958. Price 15s.

THE purpose of this book is to explain the general principles, theory, design, construction and servicing of v.h.f./f.m. receivers. Each stage of a v.h.f./f.m. receiver is analysed in detail, and a chapter is also devoted to the special features of combined a.m./f.m. receivers.

In this new edition, information has been included on the counter-type detector and other revisions have been made.

CHAPMAN & HALL

Just Published

TWO JOHN WILEY BOOKS

Logical Design of Digital Computers

by

M. PHISTER, Jr.

Director of Engineering
Thompson-Ramo-Wooldridge Products

424 pages Illustrated 84s. net

Network Synthesis

(Volume I)

by

DAVID F. TUTTLE, Jr.

Professor of Electrical Engineering
Stanford University

1190 pages Illustrated 188s. net

37 ESSEX STREET, LONDON, W.C.2

For the Advancement of Electrical Science

ELECTRICAL ENERGY is a monthly technical journal for electrical engineers having a scientific turn of mind. Its articles are designed to bridge the gulf between research and the practical application of the knowledge so gained to industry. Bringing up-to-date information about new theories, methods and materials, it is of inestimable value to electrical designers.

Annual subscription £1 . 16 . 0d.

Single copies 3s. 0d.

Order from your newsagent or direct from—

MORGAN BROTHERS (Publishers) LTD.,

28 Essex St., Strand, London, W.C.2

ELECTRONIC EQUIPMENT

A description, compiled from information supplied by the manufacturers, of new components, accessories and test instruments.

MICROWAVE TEST BENCH

(Illustrated below)

Microwave Instruments Ltd, West Chirton Industrial Estate, North Shields, Northumberland

THE Micro bench type 3930 is essentially a complete X band test bench for the teaching and demonstration of microwave technique, with complementary uses in industry, for microwave measurement and research. Basically it comprises a high quality stabilized power unit (type 3950), on to whose sloping front panel is mounted the waveguide assembly (type 3900). All those instruments necessary for microwave measurements are incorporated into the short No. 16 waveguide run and these are:—klystron mount, setting attenuator, frequency meter, directional coupler, and sampling crystal, measurement attenuator and standing-wave meter, design frequency being 9 375Mc/s (3·2cm) and the range of the 723 A/B klystron 8 500 to 9 660Mc/s.



The standing wave meter which is the only detachable item on the waveguide is capable of measuring v.s.w.r. in the order of 0·99 (1·01) and is controlled by a knob on the front of the instrument. Variation of probe penetration to a maximum of 3mm is provided and the tuned line can be adjusted to 3·2cm at the centre of its travel. Each instrument is capable of accurate measurement and the supply power unit is specifically designed to suit the requirements of the klystron used.

The resonator and reflector voltages are shown on a 3½in meter which also serves to indicate the cathode current of the klystron and as a monitor for the u.h.f. generated in the waveguide. A separate meter is needed to measure the output from the standing wave indicator and for this purpose a matching unit is available, the transistor amplifier T.A.2.B. having a sensitivity of 2μV r.m.s. for full scale deflexion.

500W R.F. POWER METER

(Illustrated in next column)

Marconi Instruments Ltd, St. Albans, Hertfordshire

WITH this instrument, Type TF 1205, direct measurement of powers up to 500W may be made at any frequency from d.c. to 500Mc/s. The equipment has commercial as well as military applications, satisfying the requirements of the ever increasing number of transmitter operators who are working on higher powers and frequencies in the v.h.f. and u.h.f. bands.

An absorption-type instrument, the TF 1205 is ruggedized, completely self-contained and fully transportable. The dissipative element is oil immersed and cooling of the finned outer casing is by free air convection. The design obviates the need for water or forced-air cooling and yet retains the advantages of compactness and a sealed construction.

The directly calibrated meter has a substantially linear scale and indicates true mean power, irrespective of waveform. Intended for direct connexion to a coaxial cable, the power meter has an input impedance of 50Ω.

The dissipative element in the TF 1205 consists of a heavy-duty high-stability resistor of tubular form, so mounted that it forms the central conductor of a slab or parallel-plate line. The input power is fed to the 'live' end of the resistor by an outward-tapering section which preserves a constant impedance between the connector and the relatively large-dimensioned resistor. From 'live' to 'earthy' end of the resistor, the broad metal plates which form the outer conductor have an inward taper so that continuous matching is maintained along the whole length of the resistor. Efficient cooling is obtained by immersing the complete slab-line assembly in a tank of transformer oil. Cooling fins provide a total surface area of over twenty square feet. By this means the overall temperature rise of the oil is restricted to approximately 30°C.

The measuring circuit comprises a vacuum thermocouple, fed from a tap on the load resistor, and a moving-coil meter mounted in a separate indicator unit. The latter can be attached to the top of the main assembly or used remote from it up to the full six feet allowed by the connecting cable.

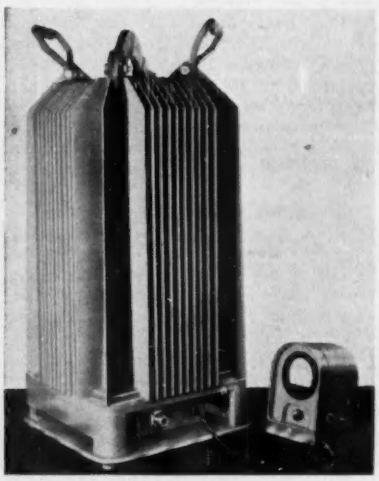

WAVEMETER

(Illustrated below)

Flann Microwave Instruments Ltd, 133 Munster Road, Teddington, Middlesex

THIS instrument (type 16/7) consists of a length of waveguide that supports, on one narrow wall, a high Q resonant cavity operating in the TE_{01} mode. Coupling between the waveguide and the cavity is through two symmetrical holes at the end of the cavity, in the common waveguide and cavity wall. Spurious mode resonances are inhibited by interruption of current paths in the appropriate points.



Tuning of the cavity is effected by means of a micrometer head that is coupled to a spherical plunger. A disk of lossy material behind the plunger is fitted to damp out resonances that may otherwise occur. The cavity is hermetically sealed to guard against changes of humidity.

Although the wavemeter can only be used from 8·4kMc/s to 10kMc/s without ambiguous readings, it is possible to use the instrument up to 12·4kMc/s if the frequency is roughly known within 500Mc/s.

The instrument is finished in silver and rhodium plate with external surfaces in dark green.

The waveguide is 0·9in × 0·4in, the unloaded Q 20 000 and the loaded Q 10 000. The calibration accuracy 1Mc/s and the descrimination 200kc/s.

DIP-BRAZED ALUMINIUM WAVEGUIDE

(Illustrated above right)

General Electric Co. Ltd, Magnet House, Kingsway, London, W.C.2

A TECHNIQUE for the ready manufacture of almost any shape of waveguide components, providing much lighter and more flexible designs, has been developed by the G.E.C. The process involves the use of specially coated aluminium sheet which is punched and assembled by an interlocking tag and



slot construction, thus dispensing with the necessity of assembly and brazing jigs. This feature enables the whole unit to be brought up to temperature quickly and uniformly by means of salt-bath brazing, eliminating the distortion experienced with torch brazing methods. In addition, the salt dip-braze produces cleaner and more uniform joints, and on X-band waveguide, tolerances can be maintained to within ·002in.

Using this technique, it has been possible to replace a complex system of aluminium die-cast waveguide components for an airborne radar transmitter-receiver. The net reduction in weight was from 8lb to less than 1lb.

A.M.-F.M. MODULATION METER

(Illustrated below)

Airmec Ltd, High Wycombe, Buckinghamshire

THE modulation meter type 210 may be used to measure the percentage modulation of amplitude modulated signals and the peak deviation of frequency modulated signals in the carrier frequency range 2·25Mc/s to 300Mc/s. Operation with reduced sensitivity is possible up to a frequency of 600Mc/s. Modulation depths up to 100 per cent and frequency deviations up to ±100kc/s, may be measured in the modulation frequency range 30c/s to 15kc/s.

Outputs at the intermediate frequency of 750kc/s and at low frequency are available from terminals on the front panel. These outputs enable the modulated envelope of the input signal and the demodulated signals to be observed on an oscilloscope.

The limiting action of the instrument is so effective that it can be used to measure spurious frequency modulation occurring on amplitude modulated signals. Furthermore, changes of mean carrier level when amplitude modulation is applied can be measured to an accuracy of better than ±1 per cent.

One of the most attractive features of the instrument is its simplicity of operation. The tuning control is adjusted until a meter reading is obtained, and the input attenuator adjusted for full scale deflexion. It is then only necessary to switch to the a.m. or one of the f.m. positions to obtain a direct reading of modulation.

MICROWAVE SIGNAL GENERATORS

(Illustrated below)

W. H. Sanders (Electronics) Ltd, Gunnels Wood Road, Stevenage, Hertfordshire

A RANGE of signal generators are available to provide oscillation over the band 2kMc/s to 12kMc/s. A typical one (illustrated) is the XT.314 used to measure the performance of receivers and for general laboratory measurements in the frequency range 7 to 12kMc/s. A piston attenuator provides a calibrated output adjustable between +10dBm and −100dBm at a 500Ω type N socket on the front panel. An internal power set control



is provided to establish a reference power level of 1mW. Facilities are provided for internal square and pulse modulation at a frequency of 3kc/s together with a synchonizing signal output. There is also provision for external pulse modulation from a source delivering a 5V positive pulse with a duration greater than 0·1μsec, and for frequency modulation.

NEW KLYSTRONS

English Electric Valve Co. Ltd, Chelmsford, Essex

THE K345 is a newly-developed E.E.V. medium power reflex klystron oscillator giving an output of 1·2W and is an equivalent of the American type VA220. The K345 has been designed particularly for microwave links. Good linearity of the frequency versus reflector voltage characteristic ensures low f.m. distortion. Frequency stability is improved by the addition of an external tuning cavity.

There are seven frequency variants which together cover the band from 5 925 to 8 025Mc/s.

The high power K339 for c.w. operation in the u.h.f. range 1 400 to 1 600Mc/s gives an output of 10kW at 30 per cent efficiency with a bandwidth of 5Mc/s. This valve is a four cavity design with water cooled collector and drift sections. Up to 55dB gain is obtainable.

The K350 is a two resonator klystron oscillator which has been specifically designed to have low noise modulation and good frequency stability making it especially suitable for the latest airborne f.m. radar applications. Output power is approximately 1W over the frequency band 8 500 to 10 000Mc/s. This valve operates at a beam voltage varying from 650 to 950V over the frequency band and has an electronic tuning range of about 12Mc/s between half power points.

The K343 is a low voltage reflex klystron giving 20mW minimum output for an input of 350V, 20mA. Mechanical tuning covers 12 000 to 14 500Mc/s. The output connexion is American type UG419/U into No. 18 waveguide. The moulded base and flying leads permit high altitude operation without pressurization. The K346 is similar except that its tuning range is 14 500 to 17 000Mc/s.

R.F. REFLECTOMETER

(Illustrated below)

General Electric Co. Ltd, Magnet House, Kingsway, London, W.C.2

THE use of this instrument substantially reduces the time needed to test wideband waveguide and coaxial line components. Hitherto a laborious process taking a matter of days, work of this nature can now be accomplished in a few hours. The reflectometer displays the magnitude of the reflection coefficient of a microwave device on a cathode-ray oscilloscope, and can also be used to show transmission coefficient.

The three essential components of the reflectometer are a microwave generator with power supplies, electronic frequency scanning supply and a regulating feedback circuit; an r.f. circuit comprising level-setting attenuator, wavemeter, and two directional coupliers each with a crystal detector and matched load on the coupled arm, and an oscilloscope, with power supplies, amplifiers and display circuits.

The complete equipment is at present available in waveguide 16 for X-band (7 500 to 11 000Mc/s), and in coaxial line for S-band (2 000 to 3 200, or 2 400 to 4 000Mc/s).

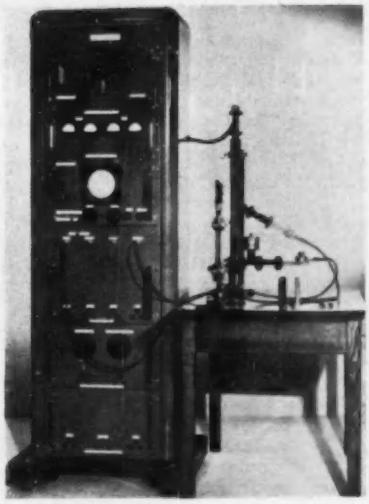

Short News Items

H.R.H. The Duke of Edinburgh has consented to be patron of the Electronic Computer Exhibition and Business Symposium to be held at Olympia, London, from 28 November to 4 December 1958.

'Hazel', a new zero-energy reactor, is now operating at the Atomic Energy Research Establishment at Harwell. 'Hazel' (homogeneous assembly-zero energy) uses enriched uranium fuel in the form of a salt of uranium curanyl fluoride which is dissolved in the heavy water used as a moderator. The core of the reactor is a stainless steel cylinder (7ft high by 2ft diameter) surrounded by a graphite reflector. The fuel solution is pumped into the cylinder from two nearby storage vessels. The system is controlled by adjusting the level of the fuel solution in the reactor vessel and by moving a vertical neutron-absorbing cadmium plate into the gap between the steel cylinder and the graphite reflector. Two cadmium plates similar to the control device are used as 'shut-off' rods: two additional 'shut-off' rods can be dropped vertically into the fuel solution in the reactor vessel. The reactor will be operated at a power of less than a watt and cooling is not necessary. 'Hazel' will be used to obtain basic nuclear information. An earlier system at Harwell, ZETR (zero energy thermal reactor) was used to study solutions of nuclear fuel in ordinary water.

Standard Telephones and Cables Ltd have received an order from the National Physical Research Laboratory of the Council for Scientific and Industrial Research of South Africa for an electronic digital computer. The machine is called 'Stantec Zebra' and will be used to carry out calculations for pure and applied research problems by the N.P.R.L.'s Applied Mathematics Section. Work in a variety of fields will be undertaken including nuclear physics, crystallography dynamics, telecommunication and statistical problems. It will also be made available to industrial organizations in the Union of South Africa. Similar machines have been sold to universities and research centres in England, Holland and Switzerland.

The BBC has announced that with the approval of the Postmaster General, low power television stations are to be installed at Swingate, near Dover, and in Folkestone. The difficulties that had arisen in finding wavelength channels on which these stations can operate without causing interference elsewhere have now been overcome, and both stations will be put into service as quickly as possible.

Mr. Graham Phillips has been seconded to the Kenya Government Broadcasting Service as Chief Broadcasting Engineer.

A radio telecommunications system, the largest of its type in the world, was inaugurated recently in Nigeria by the Nigerian Minister of Communications and Aviation. Marconi's Wireless Telegraph Co Ltd have been responsible for the construction of the whole system, which is capable of providing an ultimate capacity of over 50 000 channel miles. Marconi v.h.f. multi-channel equipment has been used at all the 14 terminal and 25 repeater stations. With the completion of this scheme internal communications in Nigeria have made a significant advance. It is now possible to telephone from Lagos to many provincial towns whose local services have not previously been connected into a national network. The important centres now linked by first class trunk services include Lagos, Ibadan, Benin, Onitsha, Enugu and Kaduna.

The Mechanical Engineering Research Laboratory, East Kilbride, Glasgow, is to hold Open Days on Wednesday, 4 June, and Thursday, 5 June. Representatives of any organization with engineering interests will be welcome. Applications for invitations, stating which day is preferred, should be sent to the Director. The whole of M.E.R.L. will be open for inspection, including two new laboratories for research on mechanisms and engineering metrology, and for research on heat transfer.

ARTICLES HELD-OVER

Due to the limitation of space, the following articles submitted for this issue have had to be omitted.

"Aerial Feeders" by L. Lewin and J. Paine (Standard Telephones and Cables, Ltd)

"New Equipment for Testing the Linearity of Modulators and Demodulators in Multi-Channel F.M. Transmitters and Receivers" by G. C. Davey (Marconi Instruments, Ltd)

"Two Automatic Impedance Plotters" by R. S. Cole and W. N. Honeyman (E.M.I. Electronics, Ltd)

"Use of Scale Model Techniques in the Design of V.H.F. and U.H.F. Aerials" by F. J. H. Charman, J. Thraves and E. F. Walker (E.M.I. Electronics, Ltd)

They will, however, be published in the near future.

"Letters to the Editor" have also had to be held-over until next month.

A two/three day Introductory Course on Radioisotopes is to be held at the North Herts Technical College from 14-16 May. The fee will be £3 3s., inclusive of luncheons and light refreshments. Further details may be obtained from the Principal of the College, Broadway, Letchworth.

A Summer School in Programme Design for Automatic Digital Computing Machines will be held in the University Mathematical Laboratory at Cambridge during the period 15-26 September. It will be along similar lines to those held in previous years, but the material has been thoroughly revised and students will have access to EDSAC 2, a new and fast machine now installed in the Laboratory. A detailed syllabus and form of application for admission may be obtained from Mr. G. F. Hickson, Secretary of the Board of Extra-Mural Studies, Stuart House, Cambridge, to whom the completed application form should be returned not later than 16 June.

The Royal Institution have chosen four films made jointly by Mullard Ltd and the Educational Foundation for Visual Aids for showing in the International Science Hall at the Brussels Exhibition. These are The Principles of the Transistor, The Linear Accelerator, Discharge Through Gases, and Mirror in the Sky. The latter film won a premier award at the recent International Industrial Film Festival at Harrogate.

The Electronic Machine Co Ltd have announced the merger with the Ellis Optical Co. The merger means that in addition to their having now entered the optical and scientific instruments field, the Electronic Machine Co Ltd will be able to increase the scope of their present business. Expansion has meant the creation of two new executive posts. Mr. W. A. Burnside has joined the company as General Sales Manager and Mr. J. Wardle has been appointed Contract Manager.

Elliott Brothers (London) Ltd have announced the conclusion of an agreement with the Holtzer-Cabot Motor Division of the National Pneumatic Co Inc of Boston, Massachusetts, U.S.A., for the manufacture of many of the Holtzer-Cabot instrument motors in the United Kingdom. The types of motors to be manufactured, to meet the special requirements of the European and British markets, include precision electric servomotors for strip recording instruments, timing devices and electronic control systems of all kinds, and also general-purpose ranges of industrial induction and synchronous fractional-horsepower motors for industrial purposes.

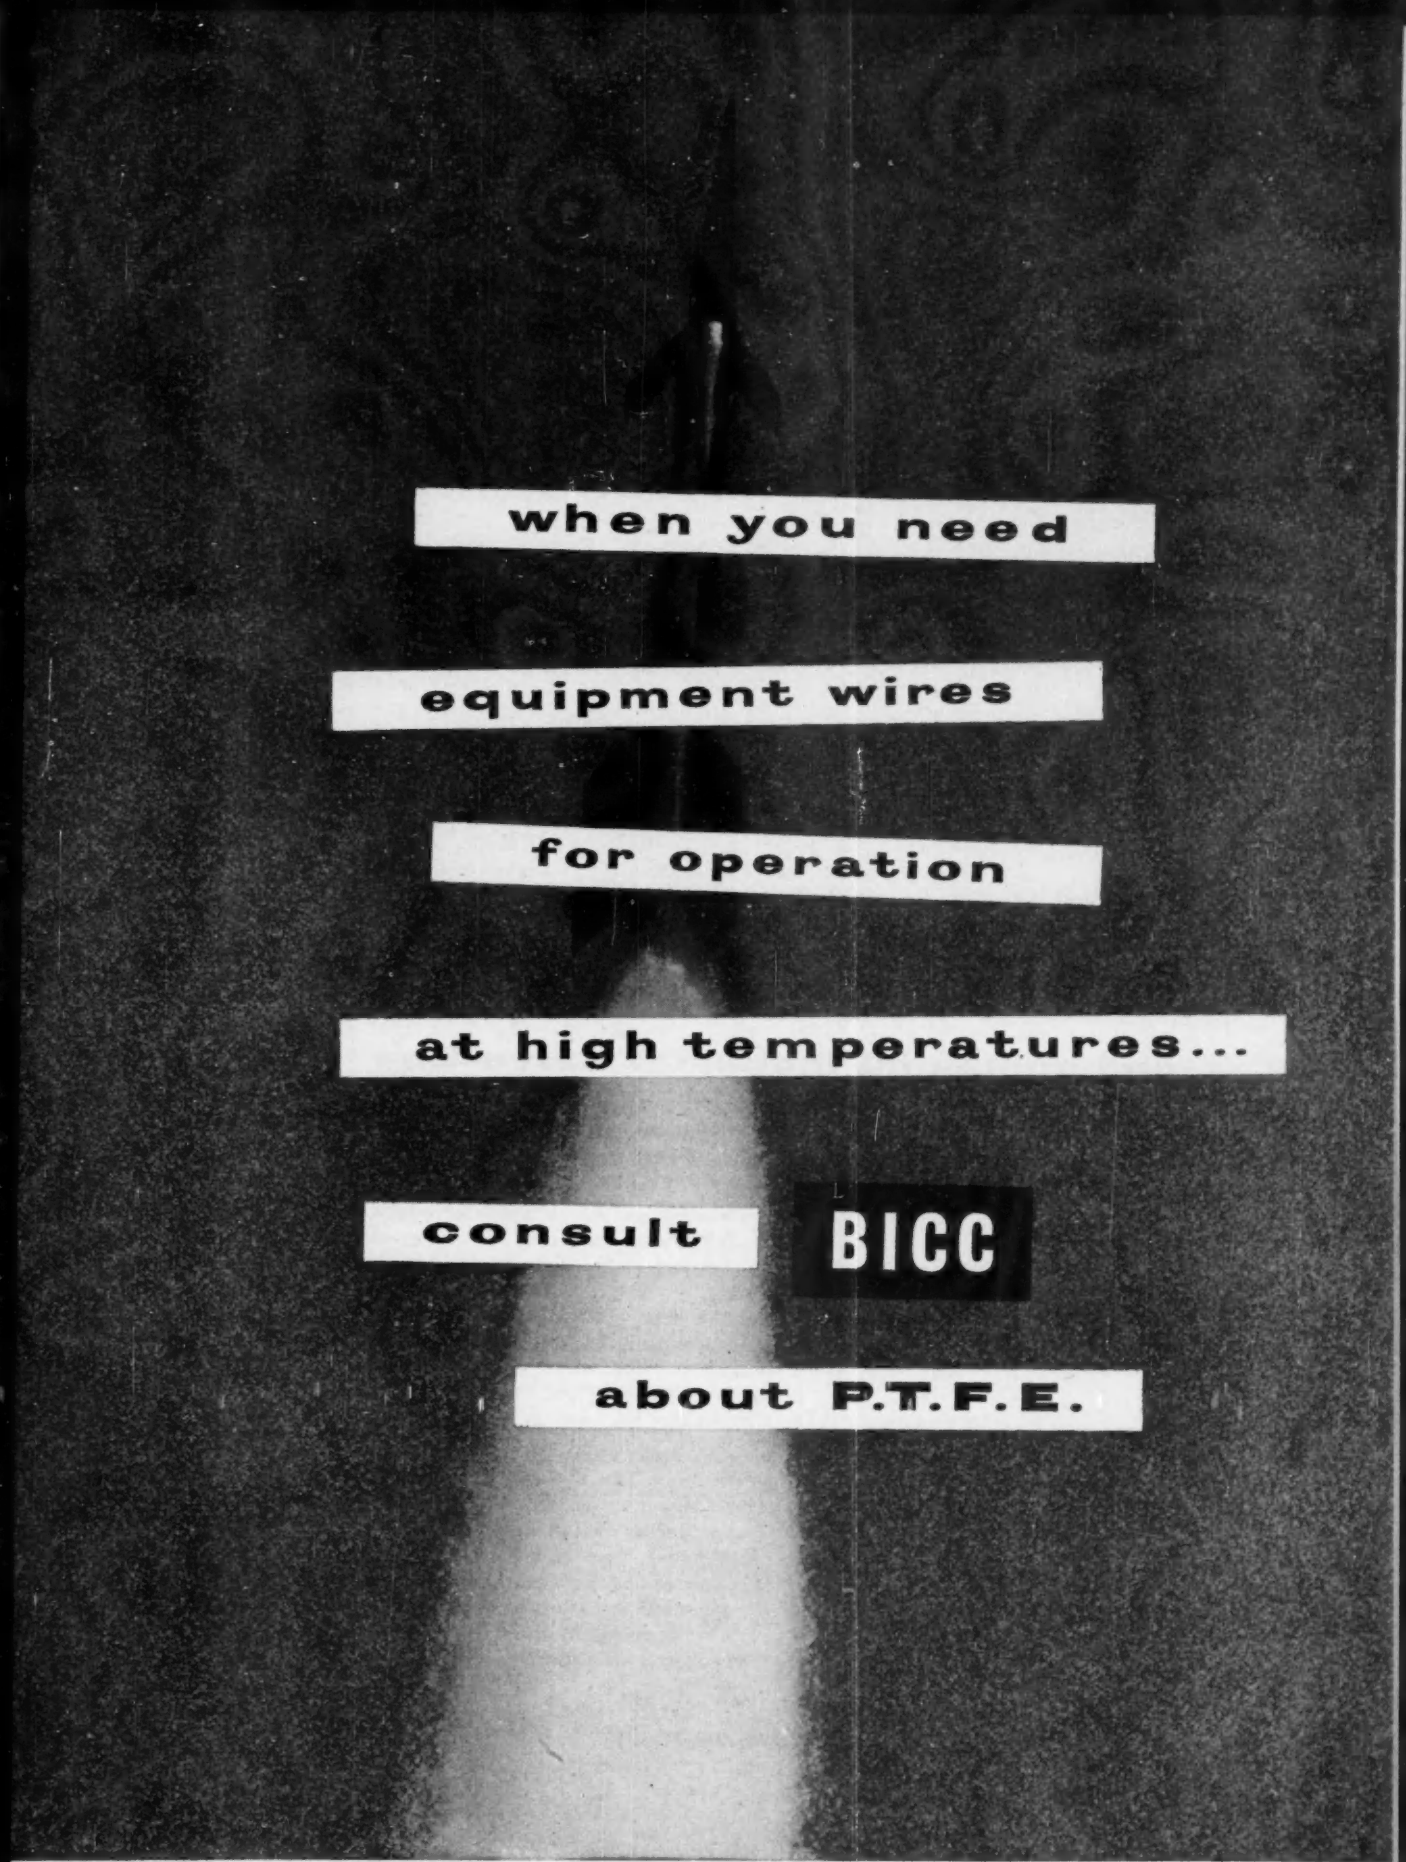

BRITISH INSULATED CALLENDER'S CABLES LIMITED, 21 BLOOMSBURY STREET, LONDON, W.C.1

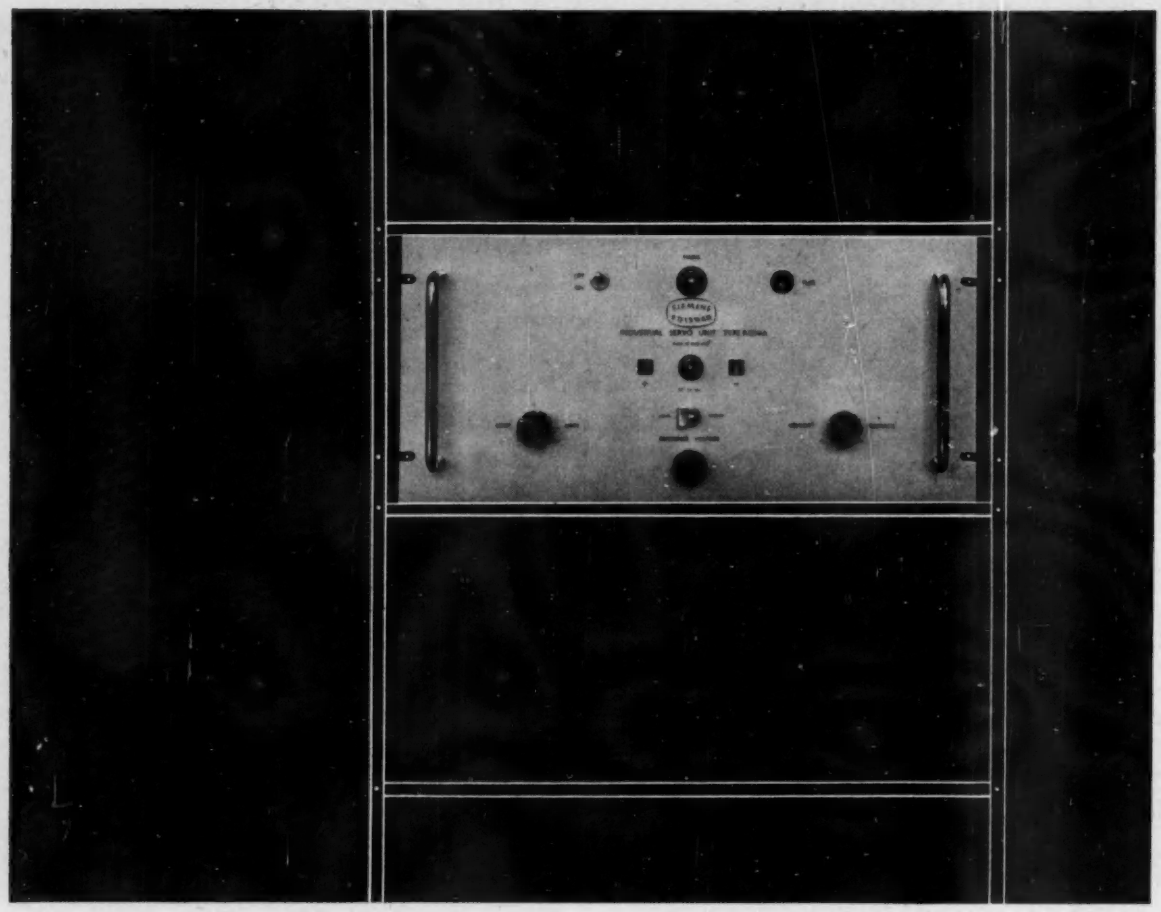

A self-contained industrial Servo Unit

for * High accuracy controlled speed drives
* Follower systems for aerials and machine tools
* Remote handling of dangerous materials

The Siemens Ediswan Industrial Servo Unit, Type R.1219A provides a complete servo system for the remote control of speed or position. It is designed to fit into standard 19-in. racking or to stand on the bench.

The unit incorporates a multi-purpose DC servo amplifier with all power supplies, and provides both positive and negative reference voltages and facilities for velocity feed back. It can be used in conjunction with split phase DC servo motors such as the Evershed & Vignoles type FA 2 and the Newton Brothers type XC 330.

Amplifier Performance

At maximum gain, 100 mV input will completely reverse the field current output.

Change in speed for a change from 'No Load' to 'Full Load' does not exceed 3 r.p.m. over the entire speed range.

If you are designing equipment or plant involving servo control, here is a well-tried unit ready to your hand that could short circuit an expensive development period and give you the results you want now. Why not send for further particulars?

SIEMENS EDISWAN

SIEMENS EDISON SWAN LIMITED

AN AEI COMPANY · 155 Charing Cross Road, London, WC2 and branches · Tel: GERrard 8660 · Telegrams: Sieswan, Westcent, London

CRC 17/2

THE FIRST COMPREHENSIVE RANGE OF TRANSISTORISED

OPEN CHASSIS REGULATED POWER SUPPLIES

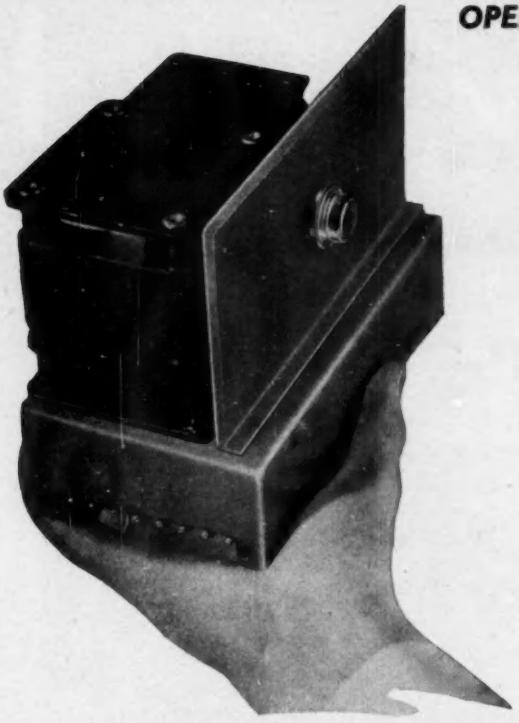

COMPARED WITH CONVENTIONAL VACUUM TUBE SYSTEMS . . . . . .

- *LESS THAN HALF COST*
- *MUCH HIGHER EFFICIENCY*
- *GREATER FREEDOM FROM DRIFT*
- *LOWER TEMPERATURE RISE*
- *MUCH SMALLER SIZE*
- *NO HEATERS*

MODEL	D.C. OUTPUT VOLTS	MAX. D.C. OUTPUT CURRENT (mA) *for permissible mains variation of*			
		±10%	+5% −10%	±7½%	±5%
T/24	24	625	775	800	1000
T/23	23	645	805	825	1000
T/22	22	670	830	850	1000
T/21	21	690	860	875	1000
T/20	20	715	885	905	1000
T/19	19	740	915	935	1000
T/18	18	775	940	960	1000
T/17	17	800	970	1000	1000
T/16	16	835	1000	1000	1000
T/15	15	865	1000	1000	1000
T/14	14	900	1000	1000	1000
T/13	13	950	1000	1000	1000
T/12	12	1000	1000	1000	1000
:	:	:	:	:	:
T/1·4	1·4	1000	1000	1000	1000

GENERAL DATA

applicable to all units

SIZE:	7¼" × 4" × 5½" high
WEIGHT:	7½ lbs.
MAINS:	200/250 V.A.C.
RIPPLE:	<1 m.V.
IMPEDANCE:	<0.05 ohm.
OUTPUT VARIATION: less than 1 part in 1000 for ±10% mains variation.	
PRICE:	£45 ex-works

Please advise mains variation when ordering.

Any intermediate voltage can be supplied with no delay in delivery. Thus, a 6·3 V. unit would be ordered as T/6·3.

made and guaranteed by:

ROBAND

ELECTRONICS LIMITED

33 Mountgrove Road, Highbury, N.5

Telephone : CANonbury 4581

BOESCH

FULLY AUTOMATIC

TOROIDAL COIL WINDER

THE FASTEST WAY IN THE WORLD TO WIND UNIFORM TOROIDS

NOTE THESE OUTSTANDING FEATURES

BOESCH fully-automatic machine can't help winding consistently uniform toroids, cores are positioned and rotated automatically . . eliminating operator variation. Production speeds are the world's fastest; fixed at 600 r.p.m., variable from 0 through 1,200 r.p.m. Model TW200 winds all types of magnet and filar wire including silk, cotton, Teflon and sleeve covered wire, from 21 to 46 SWG. Toroid size can range from 0.218 in. I.D. up to 5 in. O.D.

- 360° AND CONTINUOUS WINDING
- SEGMENTAL WINDING
- LONGITUDINAL WINDING ON RECTANGULAR CORES
- PRESET LENGTH-OF-WIRE COUNTER
- PREDETERMINED TURNS COUNTER
- FIXED OR VARIABLE WINDING SPEED
- FOOTSWITCH CONTROL
- INTERCHANGEABLE SHUTTLE HEADS
- SHUTTLES AND SLIDERS FOR WIRE SIZES ⌖ 21 THROUGH ⌖ 46 SWG
- UNIFORM, CONSISTENTLY IDENTICAL TOROIDS
- SINGLE LEVER CONTROL FOR CLAMPING AND SPREADING SHUTTLE
- ONE HAND CONTROL FOR INSERTING CORE AND REMOVING FINISHED COIL

Automation Ltd.

DEVONSHIRE HOUSE · VICARAGE CRESCENT · LONDON · S.W.11 · BATTERSEA 5549.

LONDON

seen through a British lens from 50,000 feet, through a dense smoke haze

THE INSTRUMENT CENTRE

Scientific Instrument Manufacturers Association of Great Britain
SIMA House, 20 Queen Anne Street, London, W.1., England
Imperial 6000 (instrument enquiries) · Langham 4251 (Secretariat).

SCIENCE AND INDUSTRY

Here, through one single address, you can reach over 150 makers of the world's finest instruments, covering the entire field of electrical, electronic and nuclear instruments, optics, navigational and survey equipment, laboratory and research apparatus, engineering measurement and general industrial instrumentation.

This space donated by **Airmec Limited**

STC LEADERS in

S.T.C. pioneered the first "micro-ray" telephone and teleprinter transmission across the English Channel in 1931 and installed the first major television link in Europe in 1952.

Thousands of route miles of S.T.C. microwave telephone and television links are in service all over the world.

Experience gained in the planning, the manufacture, and the installation of S.H.F. links throughout the world makes *S.T.C. the leaders in microwave radio systems.*

The technical skill and expert advice of S.T.C. engineers are at your disposal.

4000 Mc/s S.H.F. LINK

S.T.C. 4000 Mc/s frequency-modulated S.H.F. radio link can carry either a both-way television circuit or up to 600 telephone circuits with a performance which meets C.C.I.T.T. requirements for international circuits. Facilities for through-group and through-supergroup working can be provided between two S.H.F. radio systems or between a radio link and a standard coaxial cable system. Repeaters are unattended and a comprehensive alarm and supervisory system is provided.

7000 Mc/s S.H.F. LINK

S.T.C. 7000 Mc/s F.M. S.H.F. radio link is designed for use on feeder routes and is capable of carrying several telephone supergroups or television. Facilities can be provided for inter-working with other radio links or with coaxial cable systems.

PORTABLE S.H.F. LINKS

This equipment is light in weight and is quickly and easily assembled on site.

1931 'MICRO-RAY' DEMONSTRATION **1950** DOVER-CALAIS TELEVISION **1953** CORONATION TELEVISION

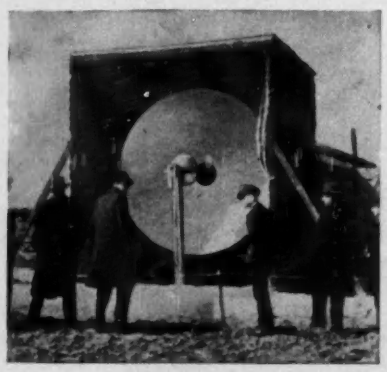

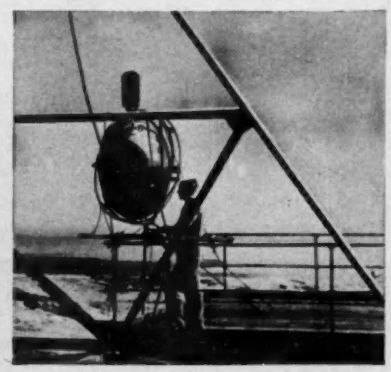

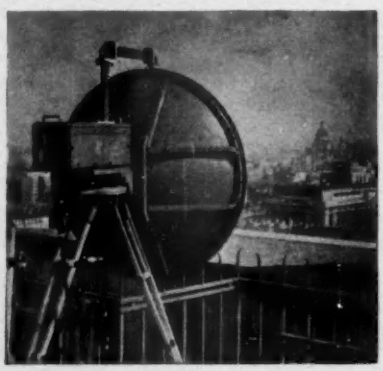

Standard Telephones and Cables Limited

microwave radio systems for telephone and television

S.T.C. super-high-frequency links have been supplied to the following countries:

Austria	Brazil
Great Britain	Japan
South Africa	Spain

Orders have been received from:

Australia	Malaya
New Zealand	Switzerland

The reliable, high-quality performance of S.T.C. S.H.F. systems depends on modern S.T.C. valves such as the klystron, coaxial line, and travelling wave amplifier tubes.

Standard Telephones & Cables Limited pioneered the Travelling Wave Amplifier and engineered the first commercial S.H.F. television link using a travelling wave tube.

S.T.C. travelling wave tubes, klystrons and high stability coaxial line tubes ensure the reliable, high-quality performance of S.T.C. S.H.F. systems.

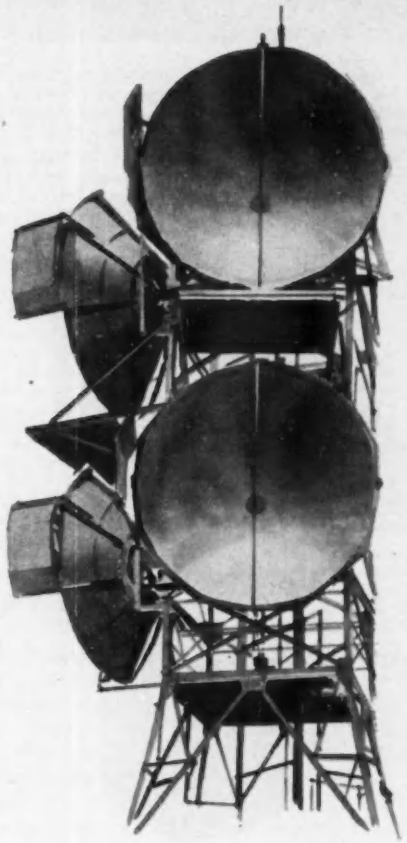

An aerial system of a typical 'Standard' permanent S.H.F. link.

1960 FIRST PERMANENT S.H.F. LINK

S.T.C. continue to make history with cross-channel international communications.

In 1960 the first permanent S.H.F. radio link will be installed between Folkestone and Lille. It will provide multi-circuit telephone and television channels.



Coaxial Line Amplifier Tube.



Travelling Wave Amplifier Tube.

CONNAUGHT HOUSE · ALDWYCH · LONDON W.C.2

We have the measure of.... recording

LOADS
PRESSURES
DISPLACEMENTS

For the simultaneous permanent recording onto film, for subsequent analysis, of up to six physical variables, e.g.:—

LOAD, FORCE, STRAIN, DISPLACEMENT, PRESSURE, ACCELERATION, TORQUE, VIBRATION, etc.



6 CHANNEL C.R.T. FILM RECORDER

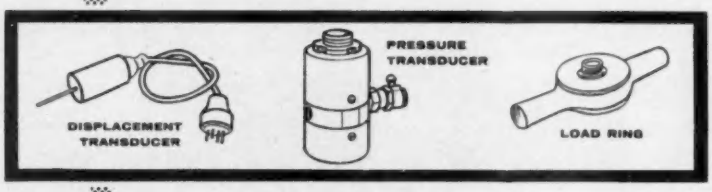



SINGLE-CHANNEL PENDEFORD SET

For measuring and indicating (up to 6 channels)

DRAW BAR PULL, GUY WIRE TENSION, SHAFT ECCENTRICITY, THICKNESS, TENSILE CREEP, STRAIN IN MACHINE MEMBERS, TENSILE LOADS, FLUID OR GAS PRESSURE, TORQUE, etc.



HIGH PRECISION AUTOMATIC MANOMETER

For the measurement of pressures from a few inches water gauge up to 100 pounds per square inch, to an accuracy of one part in ten thousand of the full-scale range.

BPA *Electronics*

for measurement and control

BOULTON PAUL AIRCRAFT LTD. WOLVERHAMPTON

J 3732

COLVERN PRECISION *Wire Wound* POTENTIOMETERS

COLVERN HIGH ACCURACY PRECISION POTENTIOMETERS are designed for those who require extremely reliable and accurate variable resistances for use in high quality Communications, Radar and Computing equipment and electronic and laboratory apparatus.

Specialists in the manufacture of Wirewound Potentiometers for over 30 years COLVERN are Britain's foremost producers of these components.

The Potentiometers illustrated are the result of years of research and practical experience. Such outstanding features as the "COLVERN CAM-CORRECTION" Device, and accurate setting of electrical angles are unique—and, whilst we do not claim these are the last word in potentiometers, we do insist they are the finest that have so far been achieved.

The Law Accuracy of a Potentiometer depends on a number of factors, including the uniformity of both the resistivity and cross-sectional area of the resistance wire, the uniformity of the element or former on which the wire is wound and the accuracy of mechanical construction. Even the highest quality materials have inherent variations which despite the most accurate workmanship make the production of a precision potentiometer a matter of costly selection.

THE CAM-CORRECTION DEVICE developed by Colvern is a unique method of mechanical correction of these inherent errors, which has made possible Law Accuracies in quantity produced potentiometers previously obtained only by costly selection.

In the COLVERN CAM-CORRECTED POTENTIOMETER a certain amount of angular motion is transmitted to the rotor contact, in addition to, and independent of, the main spindle, this motion being communicated to it by means of a lever which follows a track concentric with the resistance element. The profile of the track is controlled by screws arranged at regular intervals round the circumference and is adjusted so that inherent errors at any point in the winding are compensated for by the automatic retarding or advancing of the rotor contact.

Additionally, the COLVERN CAM-CORRECTION DEVICE can compensate for loading effects on the rotor contact providing the load/potentiometer ratio is greater than 30:1. Load effects of ratios less than this and many non-linear functions are produced by shaping the resistance element, thus obviating the necessity for external taps and shunts except in extreme cases. Where external shunts are necessary the CAM-CORRECTION accurately maintains the law between taps.

ONLY A SMALL SELECTION OF COLVERN PRODUCTS ARE SHOWN IN THIS LEAFLET. IF YOUR REQUIREMENTS ARE NOT MET BY THE TYPES ILLUSTRATED WE ARE ALWAYS INTERESTED IN YOUR POTENTIOMETER PROBLEMS AND SUGGEST YOU SUBMIT THEM TO US FOR ANALYSIS AND RECOMMENDATIONS.

TYPE CLR 20/00

The Series CLR.20/00 is a small precision Potentiometer designed for use in servo systems or other applications where mechanical drive is employed.

The precision ground shaft is mounted in ballraces to ensure good concentricity, freedom from radial play and low torque. The base, machined from light alloy, has a servo mounting spigot, the Potentiometer being secured to the panel by small clamps. This allows accurate setting of the datum by turning the unit before finally tightening the clamps.

The Potentiometer can be supplied with:—

(*a*) Flat Card Resistance Windings giving linear or non-linear functions with effective angles of resistance up to 300° (standard resolution).
(*b*) Linear Toroidal Windings with resistance angles up to 360° (standard resolution).
(*c*) High Resolution Windings on enamelled wire mandrels with angles up to 345°.

Tapping points can be provided at various angular positions.

SPECIFICATION

	STANDARD RESOLUTION	HIGH RESOLUTION
RATING	3 watts	1 watt
RESISTANCE RANGE ...	100 Ω-50K Ω	100 Ω-20K Ω
RESISTANCE TOLERANCE:		
Standard	± 5%	± 5%
Best Practical	± 1%	± 1%
ABSOLUTE LAW ACCURACY	± 0·5%	± 0·5%
MAX. WORKING VOLTS SPINDLE/TRACK ...	1,000 V. D.C.	1,000 V. D.C.
EFFECTIVE RESISTANCE ANGLE	See text above	See text above
MECHANICAL ROTATION	360° continuous rotation	360° continuous rotation
MAX. STARTING TORQUE	1 oz/in.	1 oz/in.
MIN. ANGLE BETWEEN TAPS	Dependent on number and position	Dependent on number and position
MAX. GANGED SECTIONS	6	6

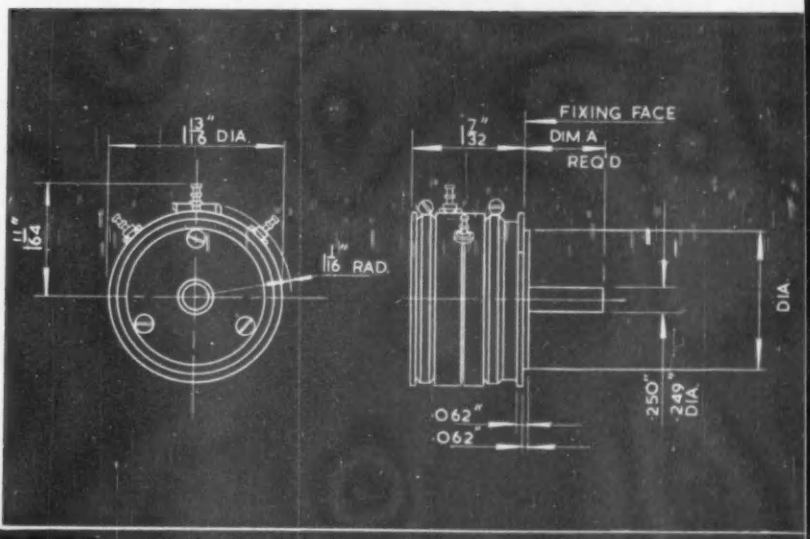

COLVERN LTD., SPRING GDNS., ROMFORD, ESSEX, ENGLAND
Telephone ROMFORD 61222 PBX
Telegrams & Cables COLVERN PHONE ROMFORD

COLVERN PRECISION

TYPE CLR 65/00



A Potentiometer without Cam Correction, but still retaining a high degree of electrical accuracy, coupled with the precise mechanical requirements essential for gear train drive.

★ Precision turned light alloy ball-race mounting and fixing face, with mineral-filled moulded housing carrying the resistance element.

★ Internal trimmers allow the electrical angle to be set accurately to + 1° — 0°.

★ Linear accuracy is held lower than ± 1·0%.

★ The calibration accuracy of this instrument does not vary with direction of rotation.

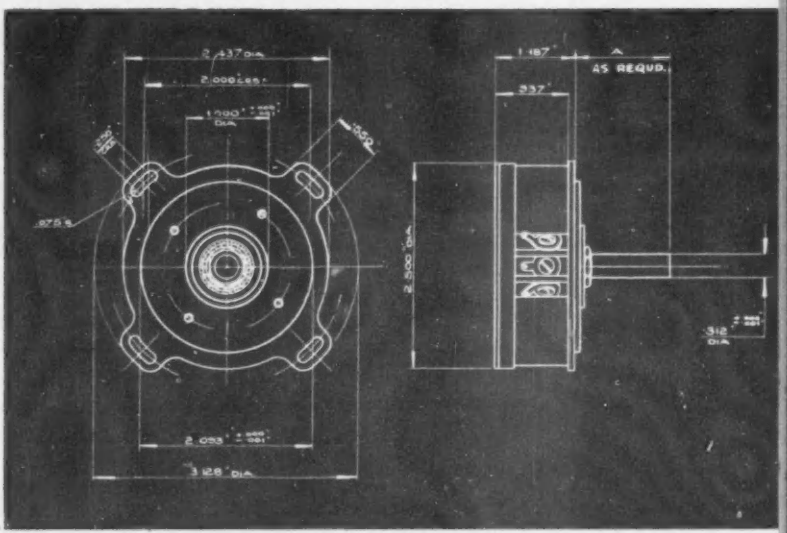

SPECIFICATION

RATING	5 watts
RESISTANCE RANGE	10 Ω–100K Ω
RESISTANCE TOLERANCE:	
Standard	± 5%
Best Practical	± 1%
ABSOLUTE LAW ACCURACY	± 1%
MAX. WORKING VOLTS SPINDLE/TRACK	750 V. D.C.
EFFECTIVE RESISTANCE ANGLE	300° + 1° — 0°
MECHANICAL ROTATION	360° cont.
MAX. STARTING TORQUE	2 oz/in.
MIN. ANGLE BETWEEN TAPS	15°
MAX. GANGED SECTIONS	6

TYPE CLR 73/00

CAM CORRECTED



The smallest version of the already well-known Cam Corrected Potentiometers.

The instrument is housed in a precision turned Duralumin case, the spindle mounted in pre-selected ball-races, thus reducing torque and ensuring concentricity of the highest order in relation to the fixing faces. Fixing is by means of a clamping ring which provides for rotating the body of the Potentiometer for electrical setting after its assembly in an equipment.

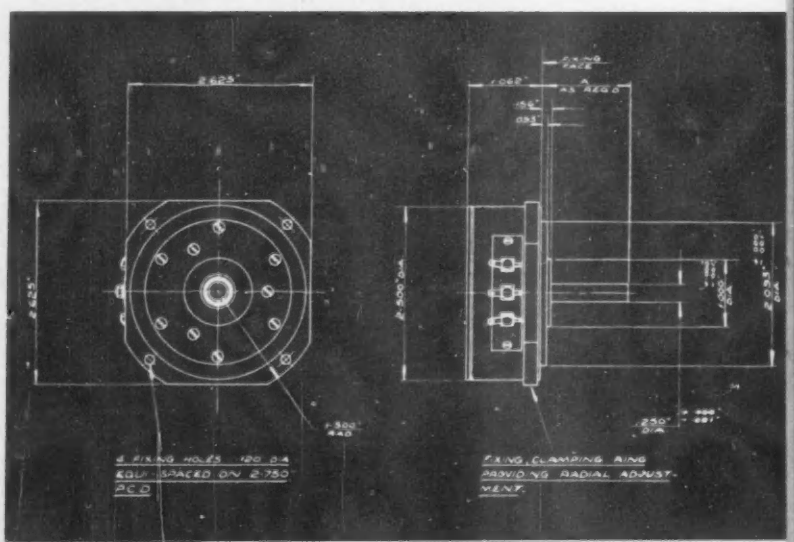

SPECIFICATION

RATING	5 watts
RESISTANCE RANGE	100 Ω–100K Ω
RESISTANCE TOLERANCE:	
Standard	± 5%
Best Practical	± 1%
ABSOLUTE LAW ACCURACY	± 0·1% 1K Ω upwards
MAX. WORKING VOLTS SPINDLE/TRACK	1,000 V. D.C.
EFFECTIVE RESISTANCE ANGLE	300° + ·25° — 0°
MECHANICAL ROTATION	360° cont.
MAX. STARTING TORQUE	2·5 oz/in.
MIN. ANGLE BETWEEN TAPS	15°
MAX. GANGED SECTIONS	3

COLVERN PRECISION *Wire Wound*

LIFE

The useful life of a Potentiometer is related to resistance give optimum results but speed of rotation, acceleration and it is difficult to predict an exact figure, in general a life

WIREWOUND POTENTIOMETERS



TYPE CLR 82/00
CAM CORRECTED

Most electronic engineers are already aware of the capabilities of this instrument, many thousands of which have been supplied during the past few years. Since its inception many improvements have been incorporated, such as internal trimmers for the accurate adjustment of the effective resistance angle, centre taps accurate both mechanically and electrically, etc., etc.

Housed in mineral-filled moulded case, the Potentiometer is not as mechanically accurate as the all-metal type, but has similar electrical characteristics. Normally fitted with $\frac{3}{8}$" diameter spindle mounted on ball-races, but a $\frac{1}{4}$" diameter spindle can be supplied if required.

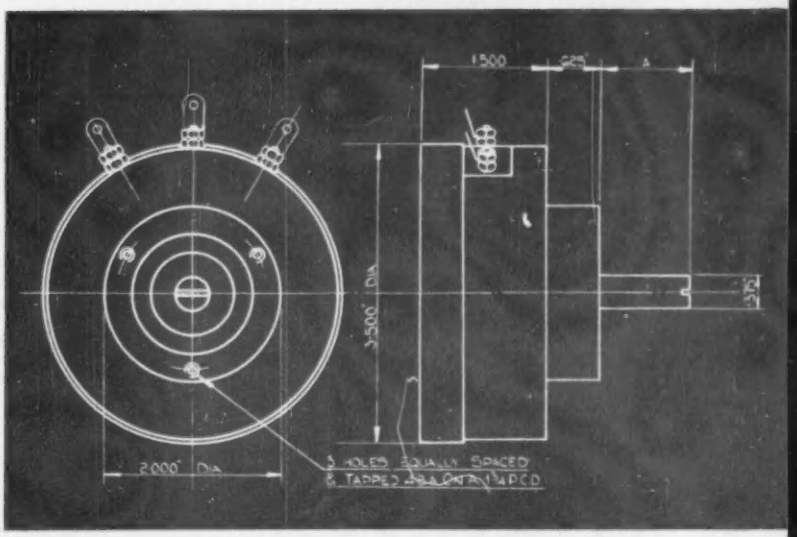

SPECIFICATION

RATING	10 watts
RESISTANCE RANGE	100 Ω–150K Ω
RESISTANCE TOLERANCE:	
Standard	± 5%
Best Practical	± 1%
ABSOLUTE LAW ACCURACY	± 0·1% 1K Ω upwards
MAX. WORKING VOLTS SPINDLE/TRACK	1,000 V. D.C.
EFFECTIVE RESISTANCE ANGLE	305° + ·25° – 0°
MECHANICAL ROTATION	360° cont.
MAX. STARTING TORQUE	5 oz/in.
MIN. ANGLE BETWEEN TAPS	10°
MAX. GANGED SECTIONS	1



TYPE CLR 83/00
CAM CORRECTED

Developed for computor circuits where a number of Potentiometers are operated through a train of gears and mechanical accuracy of alignment is essential. All metal parts are precision turned and the concentricity of the spindle and fixing faces in relation thereto is held to very close limits.

The instrument is totally enclosed and the terminations are brought out to Silvered-Ceramic Terminals. Fixing is by means of a clamping ring which provides for rotating the body of the Potentiometer for electrical setting after its assembly in an equipment.

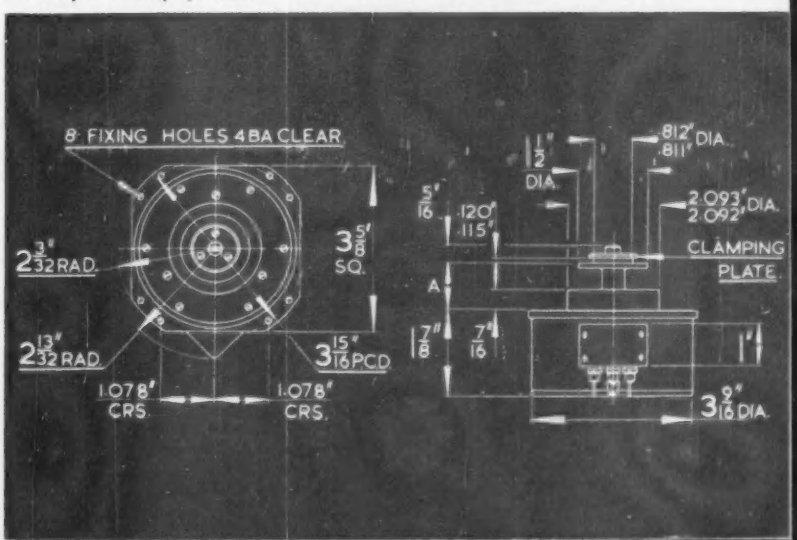

SPECIFICATION

RATING	10 watts
RESISTANCE RANGE	100 Ω–150K Ω
RESISTANCE TOLERANCE:	
Standard	± 5%
Best Practical	± 1%
ABSOLUTE LAW ACCURACY	± 0·1% 1K Ω upwards
MAX. WORKING VOLTS SPINDLE/TRACK	1,000 V. D.C.
EFFECTIVE RESISTANCE ANGLE	310° + ·25° – 0°
MECHANICAL ROTATION	360° cont.
MAX. STARTING TORQUE	5 oz/in.
MIN. ANGLE BETWEEN TAPS	10°
MAX. GANGED SECTIONS	4

alloy and size and contact material. These are selected to general conditions of use are all contributory factors. Whilst in excess of 1,000,000 shaft revolutions can be anticipated.

COLVERN PRECISION *Wirewound*

COLVERN *Wire Wound* POTENTIOMETERS

TYPE CLR 85/00
CAM CORRECTED



This Precision Potentiometer has been developed to give improved resolution and linear accuracy within a reasonable size and whilst being a little larger than our type CLR.83/00 is considerably smaller and lighter than our 6" Potentiometer type CLR.91/00.

The all metal case is precision turned from duralumin light alloy and the shaft runs in selected ball-races. The terminations of resistance element and slider contact are brought out to insulated turret lugs. Fixing is by means of a clamping ring which allows rotation of the Potentiometer body for electrical setting after assembly in an equipment.

This Potentiometer can also be produced with graded windings to match non-linear functions. We shall be pleased to advise you on your particular requirements.

SPECIFICATION

RATING	10 watts
RESISTANCE RANGE	1,000 Ω–150K Ω
RESISTANCE TOLERANCE:	
Standard	± 5%
Best Practical	± 0·2 %
ABSOLUTE LAW ACCURACY	± 0·075% 1K Ω– 5K Ω ± 0·05% over 5K Ω
MAX. WORKING VOLTS SPINDLE/TRACK	1,000 V. D.C.
EFFECTIVE RESISTANCE ANGLE	Up to 330° + ·25° –0°
MECHANICAL ROTATION	360° cont.
MAX. STARTING TORQUE	6 oz/in.
MIN. ANGLE BETWEEN TAPS	10°
MAX. GANGED SECTIONS	4

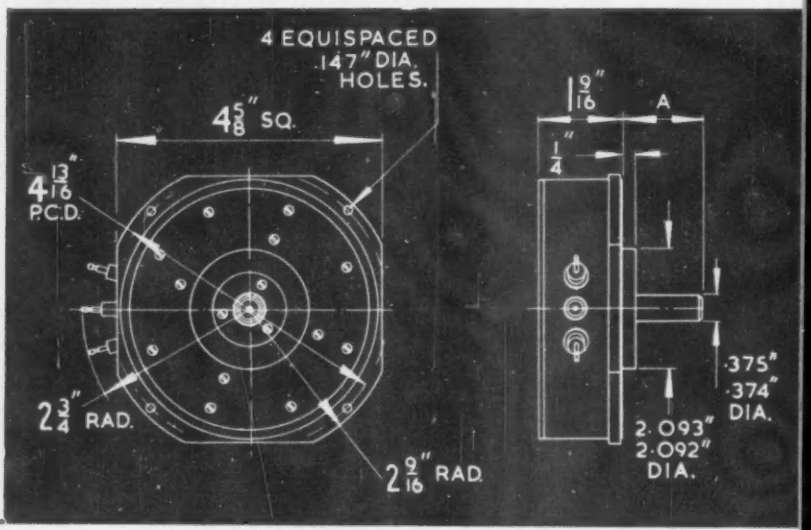

TYPE CLR 91/00
CAM CORRECTED

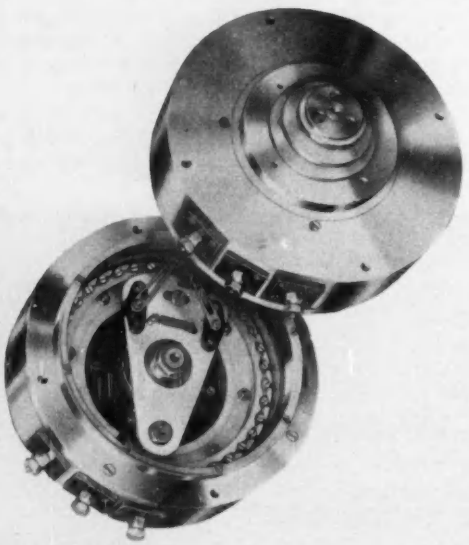

Originally developed for Radar Gunnery Equipment this Potentiometer is undoubtedly the most accurate Potentiometer in quantity production.

In addition to applications in Electronic Computing it is an ideal instrument for use as a laboratory standard. Of all-metal construction, housed in precision turned light alloy body, the instrument is totally enclosed with robust electrical terminations.

Illustration shows spindle for gear mounting. Spindles can, of course, be machined to customers' requirements.

SPECIFICATION

RATING	10 watts
RESISTANCE RANGE	1,000 Ω–150K Ω
RESISTANCE TOLERANCE:	
Standard	± 5%
Best Practical	± 1%
ABSOLUTE LAW ACCURACY	± 0·04%
MAX. WORKING VOLTS SPINDLE/TRACK	1,000 V. D.C.
EFFECTIVE RESISTANCE ANGLE	315° + ·25° – 0°
MECHANICAL ROTATION	360° cont.
MAX. STARTING TORQUE	8·5 oz/in.
MIN. ANGLE BETWEEN TAPS	10°
MAX. GANGED SECTIONS	4

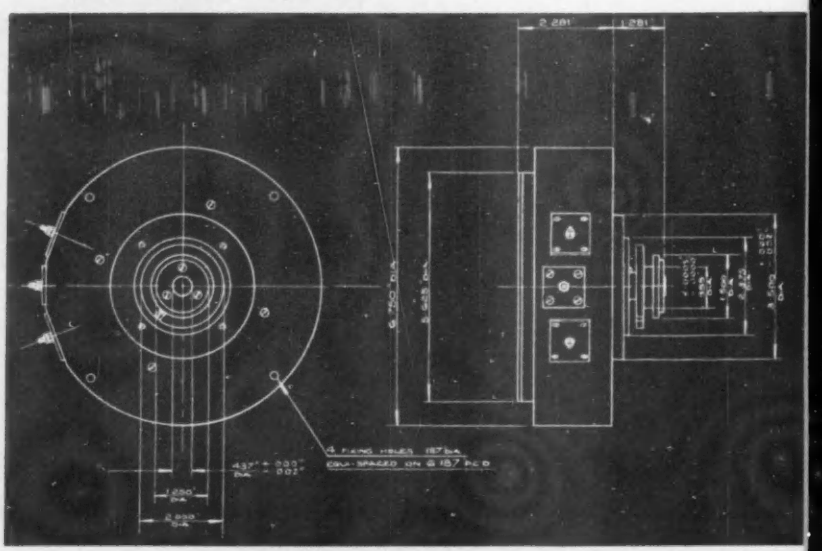

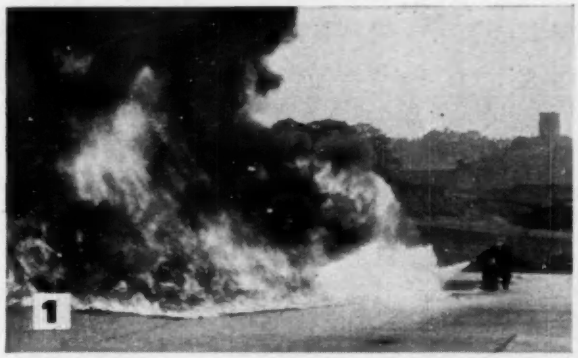

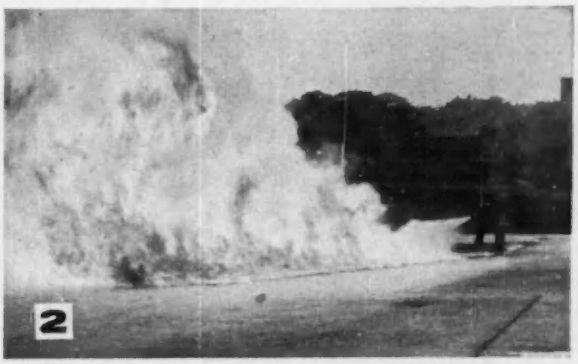

250 SQUARE FEET OF FLAME

OUT-IN ONLY 21 SECONDS

On test the new Nu-Swift 30 lb. powder extinguisher put out 250 square feet of roaring flame almost as quickly as you can read these words. This tremendous speed of attack is the most important single factor in fighting fires involving highly inflammable liquids or live electrical apparatus. Tests have proved it. Post your coupon for full details today.

SPECIALLY SUITABLE FOR USE ON FIRES INVOLVING

- electrical risks such as oil-filled transformers, switchgear and circuit breakers
- industrial processes in which inflammable solvents are used
- hot, heavy oils
- oil-fired boilers, ovens and furnaces
- oil quenching and tempering tanks
- oil storage tanks
- solvent recovery plants
- petrol and paraffin stores
- garage and transport depots

YOU CAN RELY ON NU-SWIFT

THE FACTS ABOUT THE 1630

* 30 lb. of dry powder, pressurized with 11 ozs. of carbon dioxide which expels the contents at the rate of 1 lb. per second for 28 seconds. * The powder is non-toxic, non-conductive of electricity, non-abrasive, frost proof down to −40°F., and harmless to machinery. * Easy to operate for untrained personnel, used in the sensible upright position and almost instantaneous in action. * The powder cloud has great heat-shielding properties, enabling even an amateur to tackle a serious fire effectively. * Easily installed, the Model 1630 also reduces maintenance costs. A tell-tale gauge provides instant visual confirmation that the extinguisher is under pressure.

Please let us have full details of the new Nu-Swift Model 1630 dry powder extinguisher.

Name.....

Address.....

For the attention of Mr.....

IN THE SOUTH to Nu-Swift Limited, (Dept. No. S330), 25, Piccadilly, W.1. (REGent 5724)

IN THE NORTH to Nu-Swift Limited, (Dept. No. N330), Elland, Yorkshire. (Elland 2852)

(ELE5)

A new Integrating Tachometer

with temperature compensation and linearity better than 0·12%

SPECIFICATION

Type description	**105T2H Integrating Tachometer**
Excitation (Volts)	24
Frequency (C.P.S.)	400
Input current (Amps)	.130
Input power (Watts)	1.9
Output Gradient (per 1,000 r.p.m.)	1 volt ±.2%
Phase shift with respect to input at 3,600 r.p.m.	0° ±10′
In-Phase Fundamental at zero speed (mV)	2
Quadrature Fundamental at Zero speed (mV)	6
Total harmonic (mV R.M.S.)	5
In-Phase axis error (mV)	1
Quadrature axis error (mV)	1
Linearity: up to 4,000 r.p.m. (percentage of voltage output at 3,600 r.p.m.)	±.12%
Variation of output gradient with variation in ambient temperature	−55°C to +80°C ±.3% in magnitude ± 50′ phase shift
Shift in axis error with variation in ambient temperature	−55°C to +80°C ± 10 mV in phase ± 8 mV in Quadrature
Rotor Moment of Inertia (oz.—in²)	0.094
Weight:	8 oz. for tachometer and 1 oz. for resistor
Drive	can be combined with 1.5″ and 1.8″ diameter servo motors

The latest addition to the Ketay range — of particular interest to Design Engineers currently engaged in the development of advanced computer equipment — is an extremely accurate Integrating Tachometer 105T2H.

Outstanding among its characteristics are temperature compensation and linearity better than 0.12%. Full details of this new Ketay product and of the full Ketay range are freely available on request.

Ketay LIMITED

EDDES HOUSE · EASTERN AVENUE WEST · ROMFORD · ESSEX · TELEPHONE: SEVEN KINGS 6050

K3

Ratcliffe
SPRINGS

J. S. Ratcliffe
(ROCHDALE)
LIMITED
CRAWFORD SPRING WORKS
NORMAN RD — ROCHDALE
Phone: 4692/3/4. Grams: Recoil, Rochdale

RECOIL
REGISTERED TRADE MARK

Ratcliffe Springs never lose their temper!

Cover without query

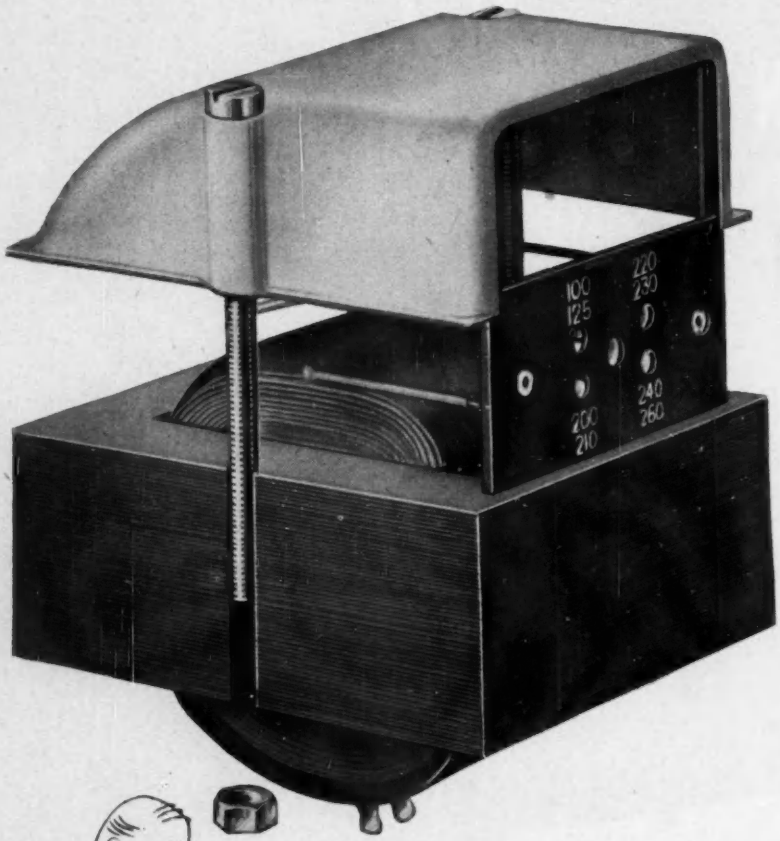

Designed by Hinchley to ensure thorough inspection. You can fit this shell without disturbing the wiring to the voltage selector, leaving no danger of unseen trouble spots. This is just another example of how a good component manufacturer works ceaselessly to ensure the greater reliability of his products. Our service is as close to you as your telephone, and we can help you by being brought into the picture at the outset of your design. Why not contact us?

Take a close look at the quality of

Hinchley
TRANSFORMERS

HINCHLEY ENGINEERING COMPANY LIMITED, PANS LANE, DEVIZES, WILTS. Phone: DEVIZES 573/5

GECALLOY

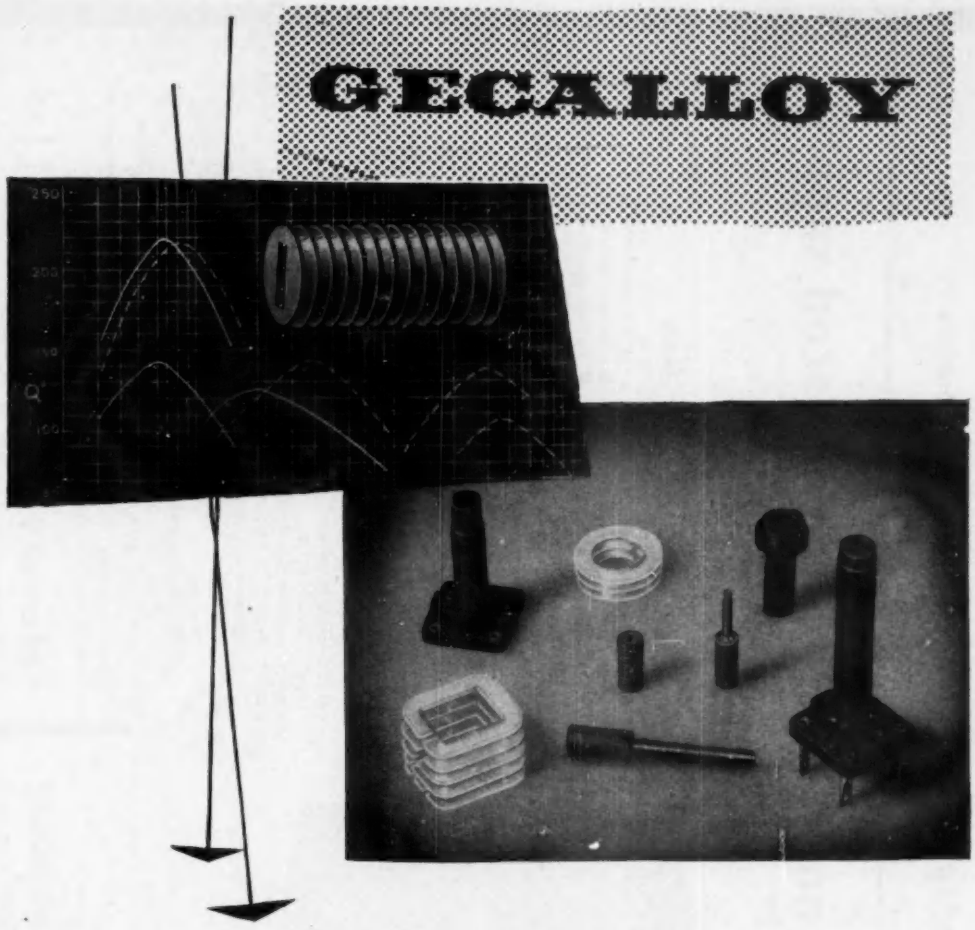

screw cores

Gecalloy screw cores for Radio and Television application provide an inexpensive and simple method of inductance adjustment.

Moulding in three types of insulated powdered iron produces cores with the highest resistivity, ideal for H.F. and V.H.F. working.

Available in three grades: M.E. for frequencies from 100 Kc/s to 50 Mc/s
M.F. for frequencies from 5 Mc/s to 200 Mc/s
M.A. for frequencies from 50 Mc/s to 300 Mc/s

A comprehensive range of bobbins also available.

Write for leaflets giving full technical details.

SALFORD ELECTRICAL INSTRUMENTS LIMITED

(COMPONENTS GROUP)

TIMES MILL · HEYWOOD · LANCASHIRE · Telephone Heywood 6868

London Sales Office: Telephone Temple Bar 4669

A SUBSIDIARY OF THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

brandenburg high voltage engineering

10, 20 and 30 kilovolt regulated supply

type S0530/5, model C

output 1 to 10 kV at 2 mA. Model A
2 to 20 kV at 1 mA. Model B
3 to 30 kV at ½ mA. Model C
input 200/250 volts, 50 cycles
polarity positive or negative grounded available
regulation against full load: better than 0.5%
against mains variations: +5%,—10%. Better than 1%

- 5" Ernest Turner movement
- current metering jack
- standard 19" × 10½" P.O. panel
- for rack mounting or bench use
- as supplied to A.E.R.E. Harwell, I.C.I., B.B.C., Mullard Research Laboratories, R.R.E. Malvern, Pye Group, Marconi Instruments and technical institutes

£125 *ex works*

50 kilovolt regulated supply

Model S0550
output 50kV at ½mA
input 200/250 volts
polarity positive or negative grounded available
regulation against full load: better than 1%
against mains variation: +5%,—5%. Better than 1%
dimensions W: 25½" H: 23" D: 11½"

£245 *ex works*

regulated D.C. power supplies by Brandenburg
contractors to the Ministry of Supply

Brochure on request For further details of the Brandenburg range of standard and specialized equipment, please write for brochure

Teleonics | communications | Ltd
196 Dawes Road London SW6 **Fulham 1534**

Can't find a standard case to meet the problem?

SAVILE TAILOR-MADES *provide the answer!*

ANY SIZE! ANY QUANTITY! 14 DAYS DELIVERY!

Strongly-built with the unique Imlok construction system and beautifully finished, these cases (racks or consoles) are made to your own specification and *supplied in any quantity.* Prices are competitive and generous discounts are available for large orders. That means for prototype work or batch productions you can still enjoy the economy of using standard designs, yet get a 'made-to-measure' job. Handles and all accessories to suit your requirements. Write now for full details and convenient order form.

tailor-made cases

ALFRED IMHOF LIMITED Dept. F.S. Ashley Works Cowley Mill Road Uxbridge Middlesex Tel: UX5-5567
Export & London Showrooms: 112-116 New Oxford Street WC1 Tel: MUSeum 7878

LGB/SI

The 1st. variable voltage Transistorised power unit at a reasonable price—£39

In the DC.65, SERVOMEX production techniques combine with semi-conductor circuits to give a faster control and a lower price. This unobjectionable result is described in data sheet DC.65 obtainable on request.

- *Output 6-14 volts, 0-1 Amp.*
- *Stabilisation factor 600.*
- *Price £39 delivered in U.K.*
- *Output resistance $<15m\Omega$.*
- *Response time $<100\mu S$.*

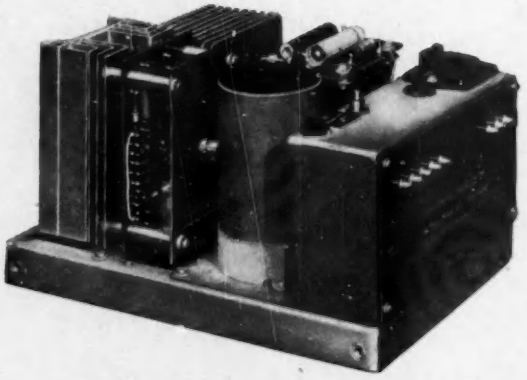

build up complex control systems with SERVOMEX

With the aid of these three basic Servomex units, servo-control systems can be assembled by the user to meet his own specialised requirements.



Armature Supply Unit A.S. 69

High impedance source for feeding the armature of D.C. Servo motors using the "constant current" technique. Nominal output 0.48 or 0.35 amps. Suitable for 105–250 volts A.C., 45–65 c/s.



H.T. Unit D.C. 68

A general purpose anode and heater supply unit giving 250–350 volts D.C. at 0–150mA and 85 volts D.C. for a voltage reference, both highly stabilised. Three unstabilised 6.3 volts A.C. outputs. For 105 to 250 volts A.C., 45/65 c/s.



Servo Amplifier S.A. 61.

High gain D.C. amplifier for driving standard 80 mA field windings. Can be powered by D.C. 68 or any other conventional H.T. unit.
Balanced circuit throughout to reduce drift. Gain 2 amperes per volt.

Servomex Controls Limited, Crowborough Hill, Jarvis Brook, Sussex. Crowborough 1247

G425

HERE and NOW TEXAS

HAVE THE RANGE...

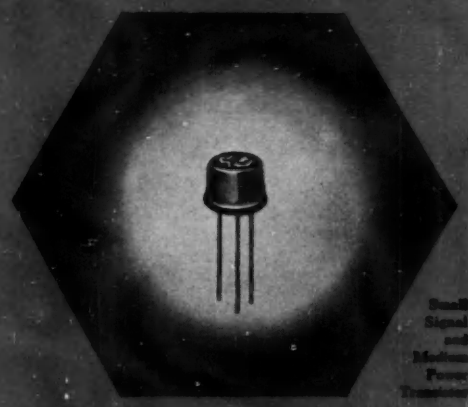

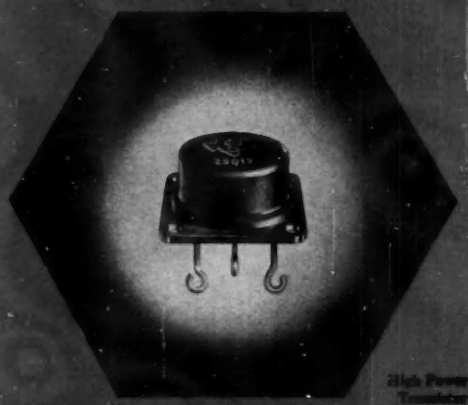

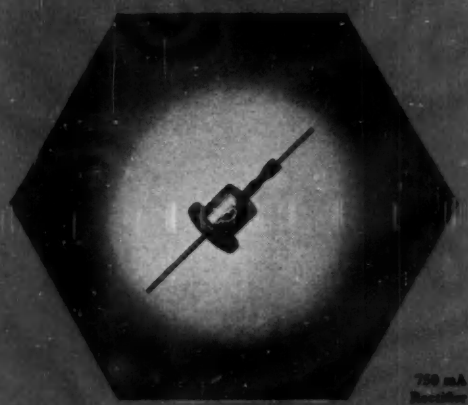

All illustrations are actual size

Silicon Transistors

Small Signal

This range of general purpose transistors is used for high gain, low level applications. Special features are:— negligible leakage current, a minimum alpha cut-off frequency up to 20 Mc/s, and a tetrode series providing 16 db gain at 30 Mc/s.

Medium Power

These 4-watt diffused base silicon transistors are ideally suitable for output stages in servo amplifiers. A pair in push-pull operation provide sufficient power to drive many types of servo motors. Two types are available, one with a maximum collector voltage of 60, the other of 100; the former is particularly useful for operating from 28-volt battery supplies.

High Power

Texas high-power transistors permit remarkable miniaturisation of power equipment. A collector dissipation of 37½ watts with complete reliability, in such a small device can only be achieved by using silicon. Furthermore, these transistors have a typical alpha cut-off frequency of 5 Mc/s.

Silicon Diodes

Medium Power

The new Texas diffused silicon technique has brought a fundamental change in semiconductor rectifiers. Peak inverse voltages up to 600 are featured in each of two ranges now readily available:— a metal-case rectifier provides a mean rectified current of 750 mA, and a glass-seal type provides 400 mA together with a forward to reverse current ratio of $2 \times 10^6 : 1$.

Computer Diodes

These miniature glass sealed diodes have a maximum recovery time of 0.3 micro sec with a forward current rating of 100 mA; there are three types with P.I.V. ratings of 50, 100 and 150 volts. The capacitance is 2.7 pico-farads at – 10 volts, 1 megacycle.

Complete data sheets are available on request.

TEXAS INSTRUMENTS LIMITED

DALLAS ROAD · BEDFORD · TEL: BEDFORD 68051 · CABLES TEXINLIM BEDFORD

7.7

WAYNE KERR INTRODUCE

Two new instruments

WIDE RANGE AUDIO OSCILLATOR S.121

WIDE BAND ATTENUATOR Q.251

- **Rapid Frequency Selection**
- **High Stability**
- **Low Distortion**

The S.121 is a high grade instrument providing a stable signal of very low harmonic content within the frequency range 10c/s—120kc/s.

The dial display is designed for simple and rapid operation and permits either the selection of major intervals by means of switches, or the continuous fine control of frequency on an open horizontal scale.

Two alternative outputs are provided. A step attenuator covers +10dB—70dB in 1dB steps on a reference level of 1 milliwatt into 600 ohms. The second output provides a continuously variable voltage from 0—30V in five decade ranges. The stability of the output level is ±0·2dB over the whole frequency range. Despite its high performance the instrument is compact, light and portable.

- **D.C. to 60 Mc/s**
- **0—60dB in 0·5dB steps**
- **75Ω Characteristic Impedance**
- **Accuracy D.C. to 20Mc/s 0·1dB, 60mc/s 0·3dB**

A light, compact, variable attenuator for use in the frequency range 0—60Mc/s. The instrument, which has a high performance, is rigidly constructed and is suitable for bench use or as a unit for incorporation in laboratory and test equipment. **PRICE £30**

SPECIFICATION OF AUDIO OSCILLATOR S121

MAINS INPUT
110/120V or 200/250V, 50/60c/s.

FREQUENCY
Range: 10c/s to 120kc/s.
Accuracy: ±1%±0·5c/s.

OUTPUT
1. 600Ω unterminated
2. 600Ω terminated
3. 0 to 30V variable impedance source.

OUTPUT LEVEL
Stability: 600Ω output±0.2dB

WAVEFORM DISTORTION
300c/s to 20kc/s <0.2%.
10c/s <2·5%, 100kc/s <0.4%

HUM LEVEL
<—60dB below fundamental

WEIGHT 17 lbs.

PRICE: £130

WAYNE KERR

WAYNE KERR LABORATORIES LIMITED, ROEBUCK ROAD, CHESSINGTON, SURREY. TELEPHONE: LOWER HOOK 1134

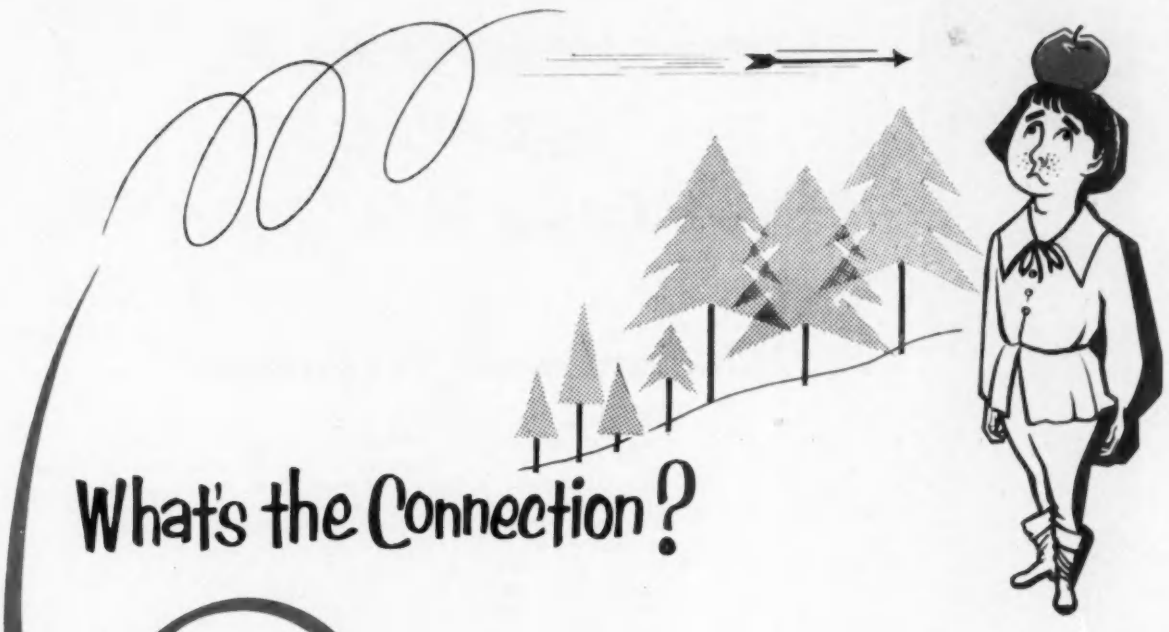

What's the Connection?

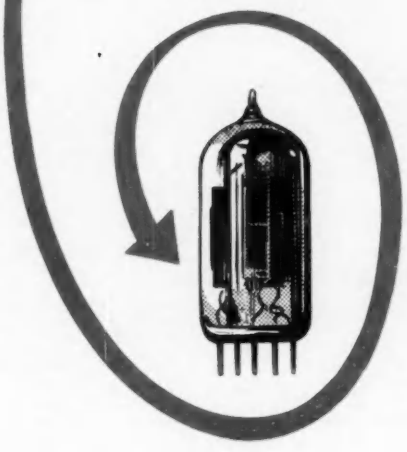

ACCURACY—That is the connection. William Tell had to be right, or face the consequences. He had his bow, judgement, experience and supreme confidence in his own ability. To-day the Delanco Organisation uses its own experience, skill and confidence, backed by the most up-to-date machinery and skilled operatives, for the manufacture of precision stampings in MICA. Possibly one of the supreme tests of this skill is in the manufacture of bridges for miniature valves, where dimensional accuracy to tolerances of 0.01 mm. are required. All tools for these parts are manufactured in our own modern tool-rooms and made by operators with years of experience in this type of precision work.

Not only in mica does this apply, but in all forms of electrical insulating materials, either as raw materials or as precision-machined components.

Whether your business is in Switchgear, Transformers, Motors and Generators, Communication and Electronics, there is a Delanco material to suit your needs. We have an efficient technical department ready at all times to deal with your problems. *Send for the latest Delanco catalogue of all electrical insulating materials.*

Anglo-American Vulcanized Fibre Co. Ltd

CAYTON WORKS BATH STREET LONDON E.C.1. CLE 3271 Grams:'PROMPSERV' AVE, LONDON

DELANCO WORKS—LEONARD STREET—LONDON E.C.2

VULCANIZED FIBRE · LAMINATED BAKELITE
PRESSBOARD · PRESSPAHN · CLOTHS, TAPES AND SLEEVINGS

Delanco Electrical Insulation

LEATHEROID · MICA · COMPOSITE INSULATIONS
EBONITE · PRESSED, TURNED AND MACHINED COMPONENTS

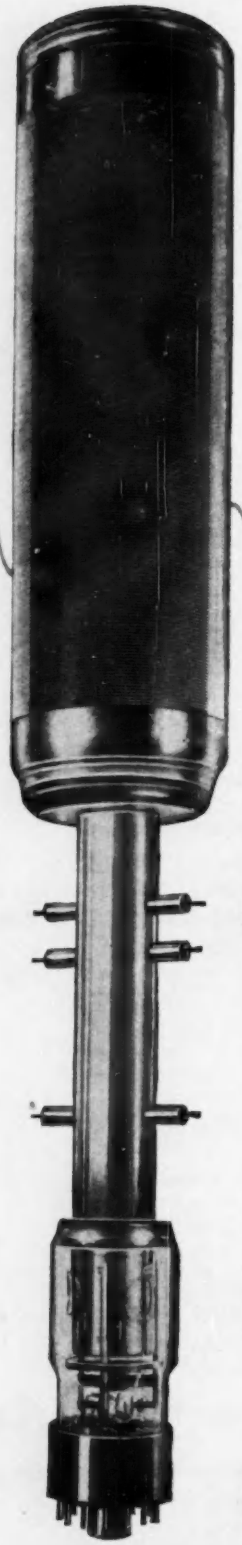

THE NEW 20TH CENTURY TRAVELLING WAVE C.R.T.

For Millimicrosecond Measurement

A new high sensibility Cathode Ray Tube has been developed specifically for the photographic recording of millimicrosecond transients. It uses a travelling wave deflecting system comprising a symmetrical pair of transmission lines and a specially designed and astigmatism corrected magnetic lens. Co-axial connectors at the ends of each T.W. deflector are available for external termination or for feed of the undistorted signal to other equipment. Post deflection acceleration is used.

CHARACTERISTICS

Trace width	.0015 inch	Available deflection T.W.	0.4 inch (266 trace widths)
Writing speed	1×10^{11} trace widths/second	Available deflection X	0.6 inch (400 trace widths)
Upper frequency limit of T.W. system	3000 mc/s	T.W. deflection impedance	120 Ω
Deflection sensibilities T.W	0.03 v/trace width	P.D.A. Helix resistance	200 MΩ
Deflection sensibilities X	0.2 v/trace width		

OPERATING CONDITIONS

Heater	V_H 6.3 v. I_H 0.6A	A_1	2.6 kV
V_g	−250 v for cut-off	A_2	0
Cathode	−1.4 kV	A_3 (P.D.A.)	20 kV

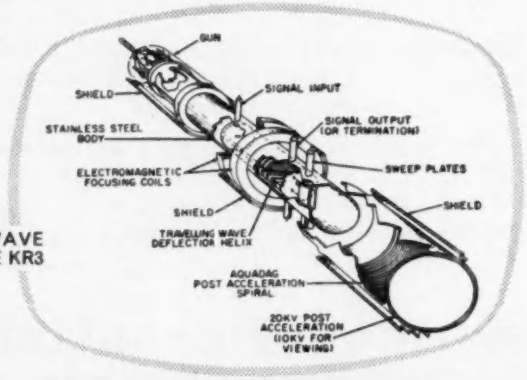

20th CENTURY TRAVELLING WAVE C.R. TUBE TYPE KR3

MANUFACTURERS OF CATHODE RAY TUBES, COUNTER TUBES AND PHOTOMULTIPLIERS

TYPE KR3 Mu-metal screens by Telcon Metals, Crawley

20TH CENTURY ELECTRONICS LTD
Centronics Works · King Henry's Drive
New Addington · Surrey · Lodge Hill 2121

20th CENTURY ELECTRONICS LIMITED

CHWR/10

Advance in miniature

Plessey are not just marching in step with the present day trend of increased miniaturisation, but are keeping quite a few paces ahead with advanced techniques and products that contribute to more compact and increasingly efficient electronic and associated equipment.

The Plessey range of sub-miniature Co-axial Plugs and Sockets are excellent examples of the Company's development and manufacturing ability, being eminently suitable for use in transistorised electronic equipment, mobile transmitters, etc. They are specifically designed for matched impedance coupling of H.F. co-axial cables.

Operating Frequencies up to 29,000 megacycles per sec.
Temperature Range; −55°C to 75°C
Working Voltage; 600 volts R.M.S.
Impedance; 50, 70 and 93 ohm lines can be accommodated.

Design engineers with problems in miniature are invited to apply for samples and further details which will gladly be sent in response to requests.

AIRCRAFT & AUTOMOTIVE GROUP · WIRING & CONNECTOR DIVISION
THE PLESSEY COMPANY LIMITED · CHENEY MANOR · SWINDON · WILTS

Plessey

Overseas Sales Organisation: PLESSEY INTERNATIONAL LIMITED · ILFORD · ESSEX · TELEPHONE: ILFORD 3040

PW3

Pipe Dream ?

When you're dreaming up plans to increase production it's time to wake up to AZOFLEX. It's the *only* process to apply a controlled quantity of developer, thus ensuring optimum quality at all running speeds—and it's the only daylight reflex copying process. There are no dangerous chemicals and because no ducting is necessary to take away offensive fumes, machines are freely movable from place to place. Exposing, developing and print delivery are completely synchronised and output is virtually as fast as the operator. In plain language the AZOFLEX MODEL 42/63 can produce more than one hundred 20″ × 30″ prints an hour at a lower cost per print than you ever dreamed.

AZOFLEX MODEL 42/63 MARK II

Synchronised printing and developing machine. Capacity: cut sheets and rolls up to 42 in. wide. Printing speed: from 6 in. to 15½ ft. per minute. Dimensions: Height 50 in., width 71 in., depth 52 in. with delivery tray extended. Weight: approximately 850 lb.

ILFORD *Azoflex*

Enquiries to:
Ilford Limited,
Industrial Sales Dept. AZ13G
Ilford, Essex,
Telephone: ILFord 3000

MACHINES AND MATERIALS FOR DRAWING OFFICE PHOTOPRINTING

Doing Pulsed or "Fast" Circuit Work?

Square Wave Generator

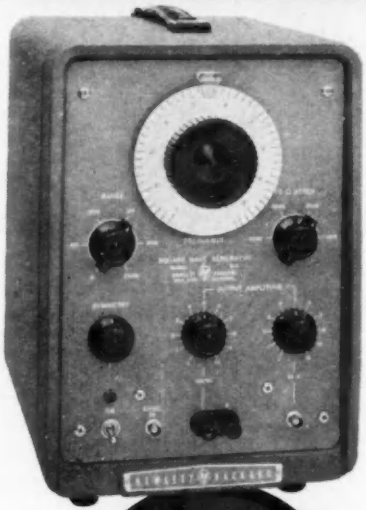

1 cps to 1 MC; 0.02 μsec rise time

-hp- 211A Square Wave Generator. Versatile, wide range instrument for testing oscilloscopes, networks, video and audio amplifier performance, modulating signal generators, measuring time constants. Offers simple control of electronic switchers; is also convenient for indicating phase shift, frequency response and transient effects.

Special features include two separate outputs — a 7 volt, 75 ohm circuit for television work and a 55 volt, 600 ohm output for high level work. Both outputs offer full amplitude variation. May be operated free-running or externally synchronized with positive going pulse or sine wave signal of 3 volts minimum amplitude. Compact, weighs only 25 lbs. Price Approx. £94

Pulse Generator

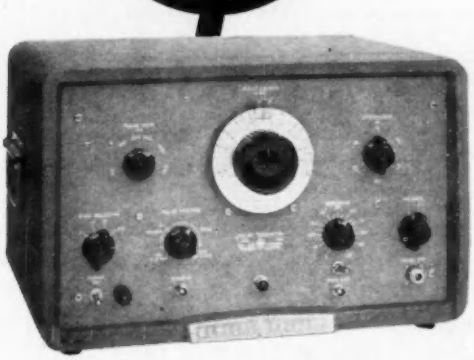

0.07 to 10 μsec pulses, 0.02 μsec rise time

-hp- 212A Pulse Generator. Time saving basic instrument for radar, television and other "fast" circuit work, including testing rf amplifiers, filters, band pass circuits; oscilloscopes and peak measuring equipment, pulse modulating uhf signal generators. Offers positive or negative pulses of 50 watts amplitude, delay and advance sync out circuits for synchronizing to other circuits, direct-reading pulse length control, high quality pulses with 0.02 rise and decay, flat top and minimum overshoot. Jitter less than 0.01 μsec. Permits delivery of accurate pulses to end of long transmission lines; if line is correctly terminated, pulse shape is independent of line length, sync conditions, input voltage or output attenuator setting. Internal impedance 50 ohms or less, either polarity. Repetition rate, internal sync 50 to 5,000 pps, external sync 0 to 5,000 pps. Available for rack mount. Cabinet model Approx. £200

Delivered in U.K. plus duty if applicable. *Data subject to change without notice.*

HEWLETT-PACKARD COMPANY

Represented by Livingston Laboratories
Retcar Street • London, N.19, England
Tel: Archway 6251

hp also offers new 120A Oscilloscope—dc to 200KC—$435

SYLVANIA SE5A1

a new cathode ray tube with a new peak in precision engineering

SYLVANIA-THORN

TYPICAL OPERATING CONDITIONS

V_{a4}	10 kv
V_{a2} for focus	170-230v
Mean plate potential & nom. V_{a1} & a_3	1.5 kv
Actual V_{a1} & a_3 (for Min. astig)	1500-1530v
I_{a2}	10 μa
I_{a4}	200 μa max.
S_x min.	30 v/cm
S_y min.	10 v/cm
* Line width	0.5 m.m.

* measured at I_t = 0.5 μa with a circular trace 50 m.m.

CAPACITANCES (nominal values)

Grid to all other electrodes	6.8 pF
Cathode to all other electrodes	5.05 pF
X_1 / X_2	1.7 pF
Y_1 / Y_2	1.15 pF
$X_1 + X_2$ / $Y_1 + Y_2$	0.1 pF
X_1 to all other electrodes less X_2	3.6 pF
X_2 „ „ „ „ „ X_1	3.6 pF
Y_1 „ „ „ „ „ Y_2	2.95 pF
Y_2 „ „ „ „ „ Y_1	2.95 pF
Grid + cathode to X deflector plates	0.1 pF
„ + „ „ Y „ „	0.1 pF

Never before has a CRT been manufactured to such high precision limits. Never before has a CRT been designed with such careful attention to the instrument maker's requirements. The SYLVANIA SE5A1 is the first in a

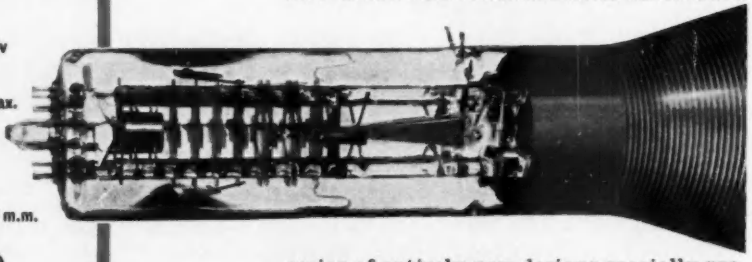

series of entirely new designs specially produced for wide bandwidth and high-speed oscillography. *It employs a spiral post deflection accelerator*, and possesses high deflection sensitivities plus an extra large useful screen area measuring 10 x 6 centimetres to give additional scope to designers. Side contacts are used in order to obtain maximum frequency response.

British designed and made throughout, the SYLVANIA SE5A1 represents an important step in CRT development. Write for full data sheets to:

SYLVANIA-THORN COLOUR TELEVISION LABORATORIES LTD. GREAT CAMBRIDGE ROAD, ENFIELD, MIDDLESEX

DIGITAL COUNTING IN INDUSTRIAL PROCESS CONTROL . . .

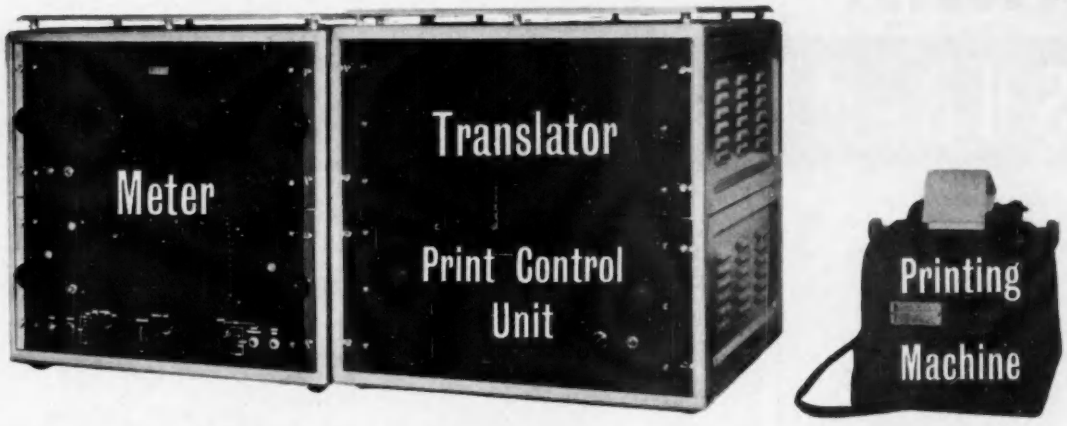

Now — a continuous printed record of frequency measurements — with the RACAL Digital Printer Type SA.65

A digital counter forms the heart of many industrial process control installations, and it is often desirable that the displayed results be indicated remotely or recorded continuously on paper.

To meet these requirements, Racal announce two additional new equipments, designed to operate in conjunction with any Racal frequency meter or universal counter/timer.

The SA.65 Digital Printer consists of a Translator, which transfers the 4, 5 or 6-digit "count" from the meter into a 10-line system; a Print Control Unit containing a serialiser and control circuitry; and a Printing Unit operated by solenoids. The whole system operates continuously and automatically up to a maximum of 60 count/prints per minute. In applications where remote indication is required, the Racal In-Line Read-Out Type SA.67 is available. This consists of from 4 to 8 neon tubes fitted in line, and operated from the output of the Translator Unit. It is contained in a panel measuring $1\frac{3}{4}$ in. by $3\frac{1}{2}$ in. by 19 in. long (for rack mounting) and may be fitted remotely or attached to the Translator Unit front panel.

The equipment is assembled largely from plug-in units, rendering servicing simple and economical. For full description and technical specification of this and other Racal Digital Counting Equipment, write to any of the addresses below.

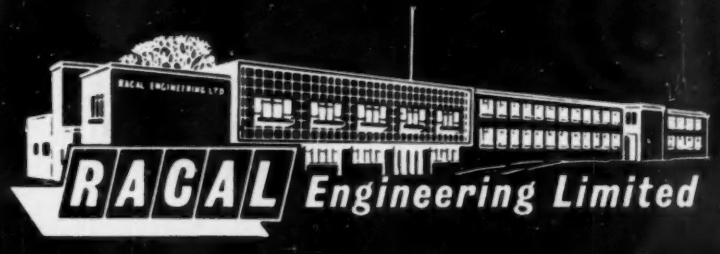

RACAL Engineering Limited

BRACKNELL, BERKS.

Telephone: Bracknell 941.
'Grams/Cables: Racal Bracknell Berks.

Northern England Agent: Farnell Instruments Ltd., Wetherby Industrial Estate, York Road, Wetherby, Yorks.

Scottish Agent: A. R. Bolton & Co., 3A, St. Vincent Street, Edinburgh. *Tel:* 32035

E.M.I.

SUB-MINIATURE RELAYS

for

Portable Electronic Equipments

Guided Weapons

Airborne Radar and Radio

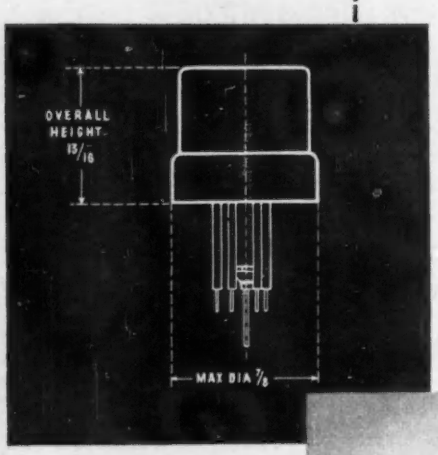

E.M.I. lightweight high-speed sub-miniature relays, measuring only $\frac{13}{16}$" x $\frac{7}{8}$", are designed for compactness and reliability. They are of the single-pole balanced armature type with long-life platinum contacts and will withstand high accelerations. Each relay is hermetically sealed and fully tropicalised.

- ✻ Weight 0·7 oz. (20 grm)
- ✻ Operating Temperature—40°C to 100°C
- ✻ Operating Power 300 mW
- ✻ Maximum contact current 120 mA
- ✻ Ministry approved to RCS 165 and H1 classification.

Type R1A and R2A relays
for 6, 12 and 24 volt operation
Price £3.10.0

Other E.M.I. Equipments include:—

OSCILLOSCOPES · VIBRATORS · MICROWAVE TEST EQUIPMENT

ACCELEROMETERS · STROBOSCOPES · TACHOMETERS

E.M.I. ELECTRONICS LTD · INSTRUMENT DIVISION

HAYES · MIDDLESEX

Tel: SOUthall 2468 (Ext. 1013 & 655)

EE143

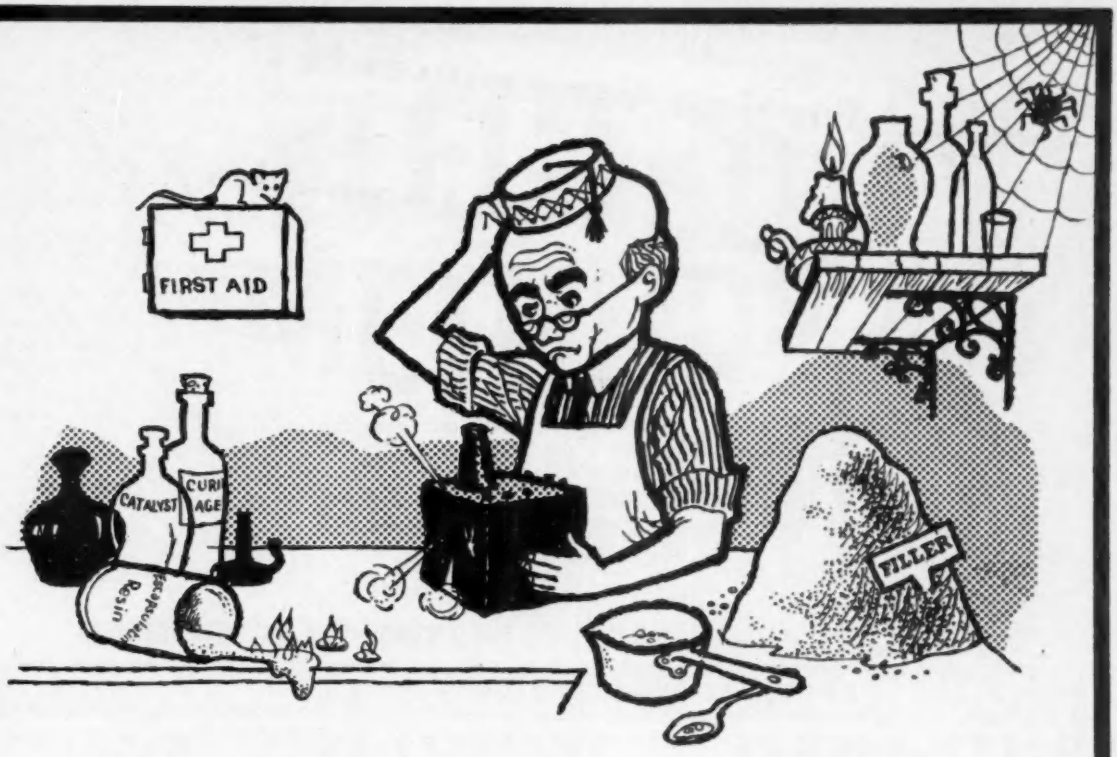

. . . better see L.E.D., Sir

If you need to protect electrical or electronic components and circuits against climatic, mechanical or electrical stress, resin casting or encapsulation can certainly answer the problem.

The LEOCAST process, as pioneered by L.E.D., is remarkably adaptable to conflicting requirements, including dielectric properties, heat dissipation, shock or torsion resistance, chemical inertia and immunity, opacity, transparency, adherence to other substances, and so on. The complex chemistry and technique of the process has been the subject of exhaustive research by L.E.D.

In the ELECTRONICS Division, L.E.D. design circuitry, components and complete equipments, and carry the job through to prototype, pre-production and production, in quantities from one-off to thousands, for Manufacturers and Research Establishments.

for resin castings and encapsulations and for electronics design, prototypes & production

LION ELECTRONIC DEVELOPMENTS LTD

One of the Gresham Lion Group of Companies

LION WORKS, HANWORTH ESTATE, FELTHAM, MIDDX.

Tel: FELTHAM 6661

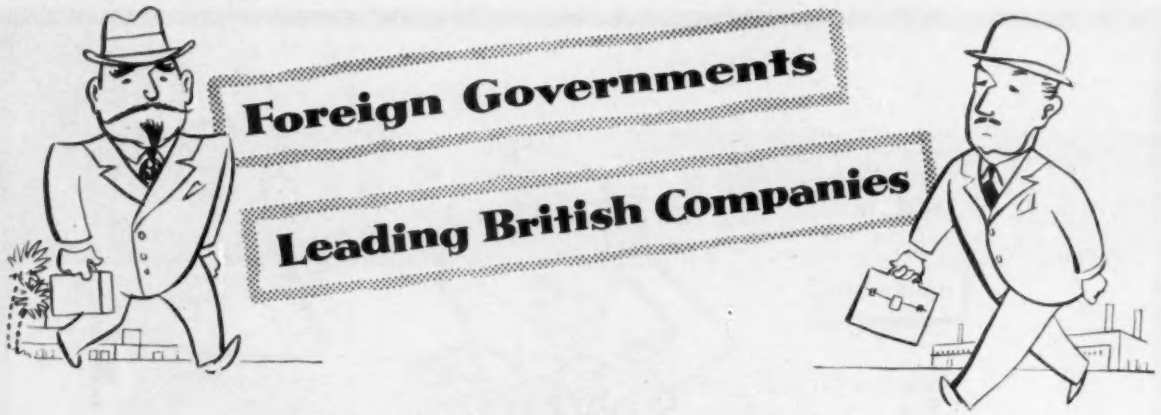

Spectrum Analysis for N.A.T.O., G.W. test gear for the M of S (sub-contracted from the main contractor), units for computors, automatic inspection devices, are all the same to Winston Electronics. W.E. have the development and production facilities to do most things electronic and welcome sub-contract enquiries.

A.I.D. and A.R.B. approved.

WINSTON ELECTRONICS LIMITED

GOVETT AVENUE · SHEPPERTON · MIDDLESEX

Telephone: Walton-on-Thames 6321

AMPHENOL

AMPHENOL (Great Britain) **LTD.**

invite enquiries for Engineering data and details of the availability of the well-known range of "AMPHENOL" Products.

AMPHENOL (Great Britain) **LTD.**

Ormond House, 26/27 Boswell Street, London, W.C.1

Telephone CHAncery 8956

ELECTRO METHODS LTD OF STEVENAGE

BRITAIN'S FOREMOST DESIGNERS

AND MANUFACTURERS OF

HIGH STABILITY MAGNETIC AMPLIFIERS

An extensive range
of our standard types of
SINGLE-STAGE or PUSH-PULL
Magnetic Amplifiers
is always available for
prompt delivery

*

SPECIAL TYPES CAN BE DESIGNED
TO SUIT YOUR NEEDS

*

Full technical data
and illustrated leaflets promptly
forwarded on request

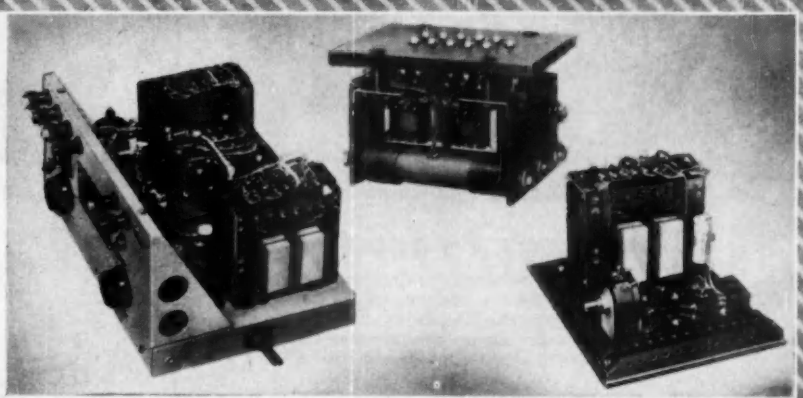

ELECTRO METHODS LTD. 17-41 CAXTON WAY, STEVENAGE, HERTS. Phone: STEVENAGE 780

FIRST OF ITS KIND

CHEMICAL AND PETROLEUM ENGINEERING EXHIBITION

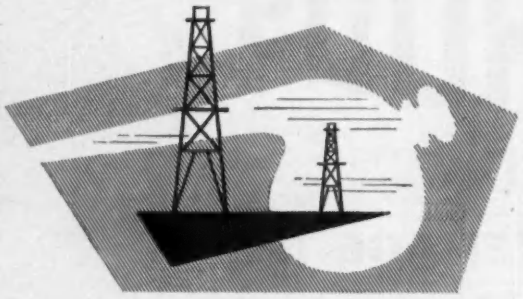

An outstanding development in British industry in the last twenty years has been the expansion of the Petroleum refining and Chemical Industries. The Chemical and Petroleum Engineering Exhibition—the first of its kind—will present dramatic evidence of the tremendous achievements that have been made.

At Stand after Stand, contractors, designers and specialists in every branch of British chemical and petroleum engineering will have something to show of vital interest.

The Exhibition will also include a conference on "The Organisation of Chemical Engineering Projects" arranged by The Institution of Chemical Engineers and The Institute of Petroleum; and films will show how the Chemical Plant and Petroleum Equipment Industries have helped in the development of their consumer industries.

A visit to this Exhibition is a MUST to all concerned in chemical and petroleum projects and to everyone whose industry is in any way influenced by such projects.

JUNE 18-28 1958
OLYMPIA
LONDON

AN EVENT TO REMEMBER

With the Patronage and support of the BRITISH CHEMICAL PLANT MANUFACTURERS ASSOCIATION and the COUNCIL OF BRITISH MANUFACTURERS OF PETROLEUM EQUIPMENT *whose stands will act as Information Bureaux.*

Organised by **F. W. BRIDGES & SONS LTD.** Grand Buildings, Trafalgar Square, London, W.C.2

SOLDERING EQUIPMENT

by

ADCOLA

(Regd. Trade Mark)

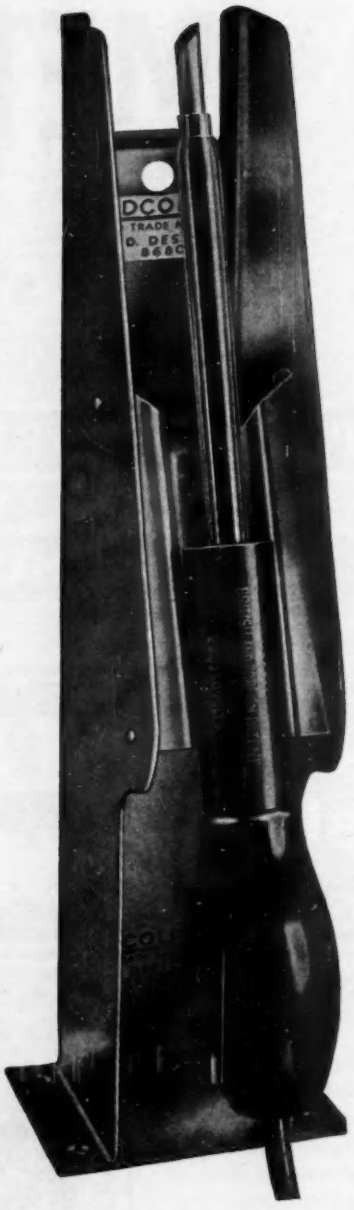

(Illustrated)
$\frac{3}{16}$" **DETACHABLE BIT MODEL**
(List No. 64)
&
PROTECTIVE SHIELD
(List No. 68)

Supplied for all Voltages. *Designed for Factory Bench Line Assembly Radio, T.V., Deaf Aid, etc.*

Write for Catalogues

Sole Proprietors and Manufacturers

ADCOLA PRODUCTS LTD.,
GAUDEN ROAD, CLAPHAM HIGH STREET, LONDON, S.W.4
Telephone: MACaulay 3101 & 4272

Sign here, please?

A.I.D., *London No. 3 District*

BRITISH TABULATING MACHINES CO. LTD., *Letchworth*

BRITISH TABULATING MACHINES LTD. (RESEARCH), *Stevenage*

C.E.R.N., *Geneva, Switzerland*

ELLIOTT BROTHERS (LONDON) LTD., *Borehamwood*

ENGLISH ELECTRIC LTD., *Luton*

ENGLISH ELECTRIC LTD., *Stevenage*

FERGUSON RADIO CORPORATION, *Enfield*

G.P.O. B.T.S., *London*

G.P.O. INSPECTION BRANCH HEAD-QUARTERS, *London*

G.P.O. STUDD STREET, *London*

MARCONI'S WIRELESS & TELEGRAPH CO. LTD., *Chelmsford*

MINISTRY OF SUPPLY

PAMPHONIC REPRODUCERS LTD., *London W.1.*

POWERS SAMAS ACCOUNTING MACHINES LTD., *Croydon*

PYE LTD., *Cambridge*

A. V. ROE & CO. LTD., *Woodford, Cheshire*

SIEMENS EDISON SWAN LTD., *West Hartlepool*

SIEMENS EDISON SWAN LTD., *Woolwich*

STANDARD TELEPHONES & CABLES LTD., *Southgate*

SYLVANIA THORN COLOUR TELE-VISION LABORATORIES LTD., *Enfield*

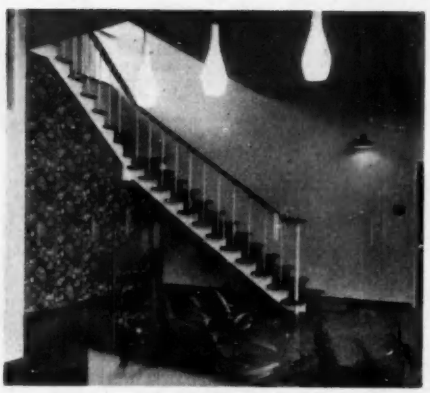

Our Visitors' Book is a graphic record of the big people who come to see at first hand what help we as sub-contractors can offer them. Within a few months of opening our new, designed-for-the-job factory, the book was decorated with a score or so of the leading names in telecommunications and electronics. Most of them have used—and many still are using—our specialized production services. In fact, continuity of association is one of the features we are proudest of. In the past twelve years no single firm has given us just one job to do and then said "Good-bye". They *all* come back for more.

BROXLEA PRODUCTS LIMITED

A.I.D. approved sub-contractors

PARK LANE, BROXBOURNE, HERTFORDSHIRE **Tel: Hoddesdon 4455**

IS THIS YOUR BLIND SPOT?

Companies taking pride in their high rate of productivity on the Factory floor are often blind to the opportunities for increased productivity in the drawing office.

The Simplon "Modular Line" units, two of which are illustrated here, are specially designed as complete individual work stations, with the drafting board as the hub of the draughtsmen's activity. Thus all unnecessary movement is eliminated and, since countless efficient room layouts are possible, all available space is utilised to the best advantage.

MAY 7-17th AT EARLS COURT
MECHANICAL HANDLING EXHIBITION
See our STAND No. 274

SIMPLON

DARGUE BROS. LTD.
NEW SIMPLON WORKS
HALIFAX, YORKSHIRE
Telephones: HALIFAX 3218/9

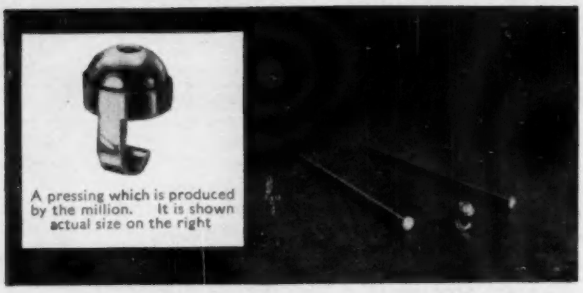

FOR TWO PINS . . .

Been let down on delivery?

A need for large quantities of accurate pressings very quickly?

Let us quote you, you will be impressed.

H. A. LIGHT (PRODUCTIONS) LTD.

Winster Grove, Shady Lane, Kingstanding, Birmingham, 22a
Telephone: GREat Barr 4211-2

are proud of their ability, prices and delivery for any quantity of small, accurate pressings in metal.

London Office:
St. George's House, 44 Hatton Garden, London, E.C.1
Telephone: CHAncery 5776

ROTARY TRANSFORMERS



H.T. 31
Input 11.5 volts
Output 250 volts at 125 m/a.

H.T. 32
Input 11.5 volts
Output 490 volts at 65 m/a.

DIMENSIONS
Diameter 3½ in. inc. brushes.
Length 5 in.
Weight 4¼ lb.

Tropicalised if required.

AS USED IN PYE MOBILE TRANSMITTERS AND RECEIVERS P.T.C. 102 AND P.T.C. 114. Also HUDSON'S MOBILE RADIO TRANSMITTERS AND RECEIVERS.

DYNAMOTOR ROTARY TRANSFORMER

D.C. input 13.5 v.
Output 285 v. at 75 mA.

D.C. input 27 v.
Output 285 v. at 75 mA.

D.C. input 12 v.
Output 250 v. at 50 mA.



AS SUPPLIED TO GOVERNMENT DEPARTMENTS & LEADING MANUFACTURERS

Tropicalised if required.

DEPENDABLE RADIO SUPPLIES LTD

12A TOTTENHAM ST., LONDON, W.1. LANgham 7391/2.
(2 minutes Goodge Street Station.
Opposite Heals in Tottenham Court Rd.)

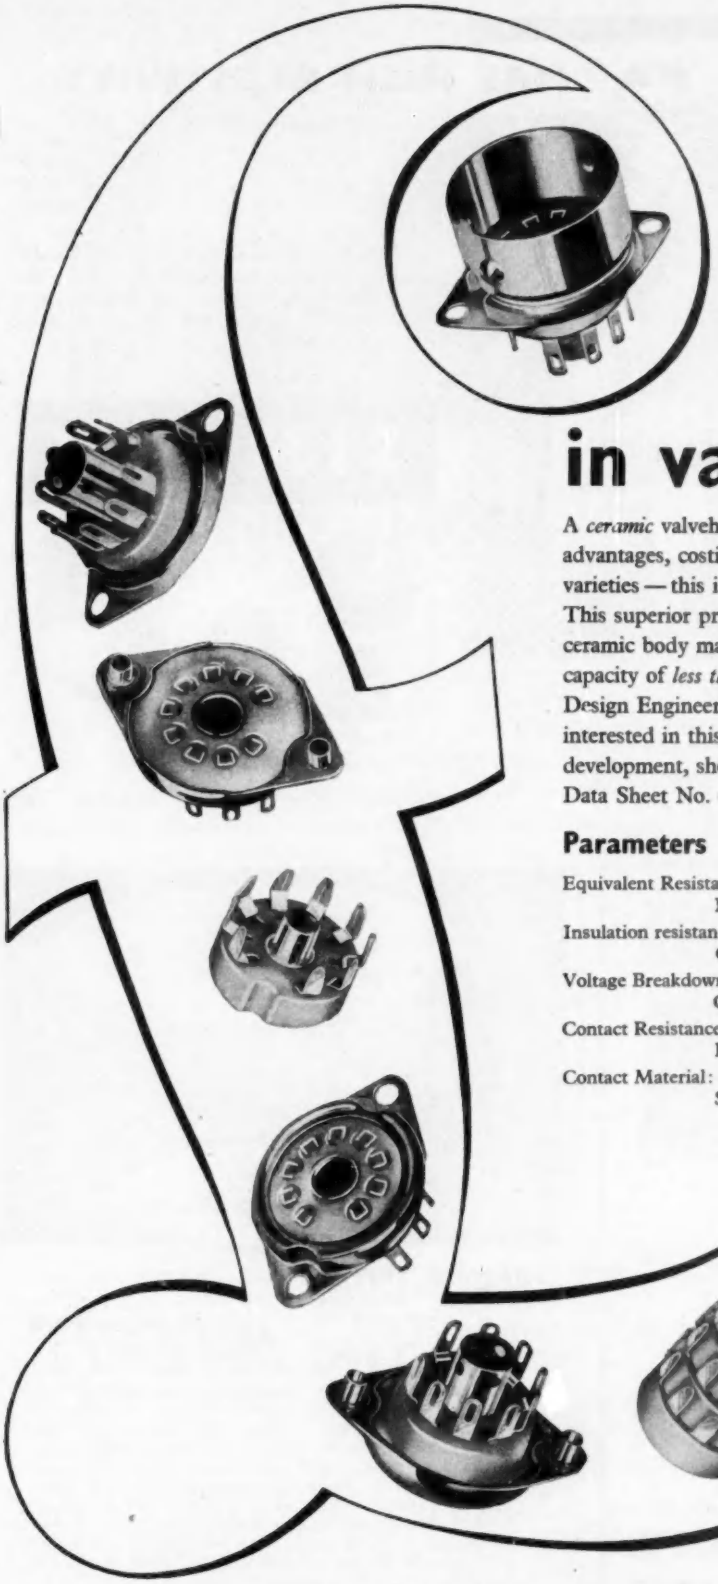

New value in valveholders

A *ceramic* valveholder with its many inherent advantages, costing no more than the ordinary moulded varieties — this is the latest news from Plessey at Towcester. This superior product employs high-grade, low-loss ceramic body material and has a pin-to-pin capacity of *less than 0.5 pf*.
Design Engineers, manufacturers and others interested in this cost-cutting, performance-improving development, should request a copy of Plessey Data Sheet No. 6062 which contains comprehensive data.

Parameters

Equivalent Resistance at 20 Mc. between 2 adjacent contacts:
Not less than 3 megohms

Insulation resistance:
Greater than 20 x 10^{12} ohms

Voltage Breakdown:
Greater than 3.5 Kv pin-to-pin and pin-to-earth

Contact Resistance:
Less than 4 milliohms

Contact Material:
Spring quality Brass — Silver Plated

Plessey

CHEMICAL & METALLURGICAL DIVISION · COMPONENTS GROUP
THE PLESSEY COMPANY LIMITED · WOOD BURCOTE WAY · TOWCESTER · NORTHANTS · TEL: TOWCESTER 312
Overseas Sales Organisation: PLESSEY INTERNATIONAL LIMITED · ILFORD · ESSEX · ENGLAND · TELEPHONE: ILFORD 3040
TC5

SINTOX HAS HIGH RESISTIVITY

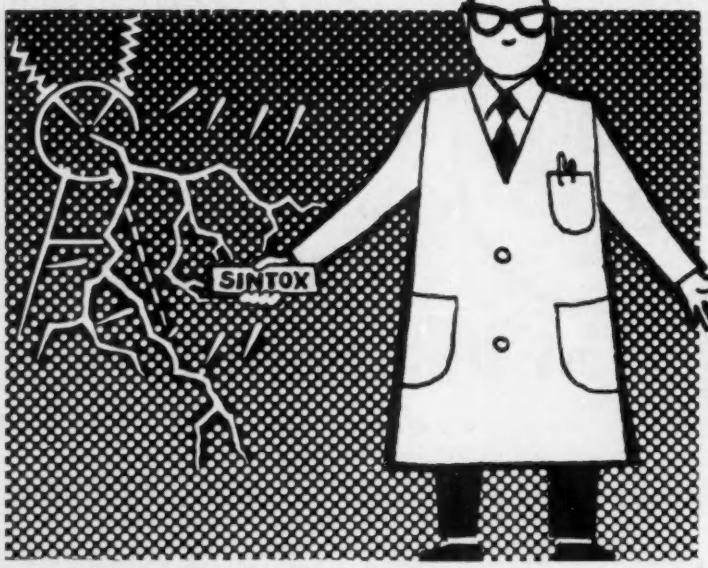

Volume Resistivity Ohm.Cm.

14°c	10^{15}
100°c	$2X10^{15}$
200°c	$4X10^{14}$
300°c	$3X10^{13}$

Due to the high resistivity of Sintox, it is unsurpassed as an electrical insulator and it is widely used for thermionic valve components, high temperature terminations, multi-hole thermocouple tubes and many other applications.

SINTOX

STAS

Sintox Technical Advisory Service

This service is freely available without obligation to those requiring technical advice on the application of Sintox Industrial Ceramics. Please write for booklet or any information required enclosing blue print if available.

SINTOX is manufactured by

LODGE PLUGS LTD., RUGBY

HIGH GAIN FREQUENCY SELECTIVE AMPLIFIERS

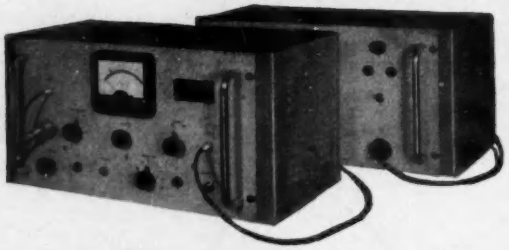

FOR THERMOCOUPLE OR OTHER APPLICATIONS

- ★ Voltage gain 10^8 maximum
- ★ Band-width approximately 7 per cent of carrier frequency
- ★ Plug-in filter units enable carrier frequency in the range 5 c/s to 2 Kc/s to be chosen

BARR & STROUD LTD
Anniesland, Glasgow, W.3

LONDON OFFICE : 15 VICTORIA STREET, S.W.1

HELI-COIL
REGD. TRADE MARK

PUSH-TYPE *INSERTS*

THE READY-MADE THREAD FOR MOULDED MATERIALS

Eliminate the need for solid brushings and tapping, use HELI-COIL PUSH-TYPE INSERT the ready-made screw thread for moulded and plastic parts, die cast alloys, powdered metals, all soft light materials and many hard metals. Pushed directly in drilled, cast, or moulded, blind or through holes, this is the ideal low-cost, volume production, fastening method. A few shillings in tooling is all you need for up to 1,200 holes and more per hour.

For faster, cheaper production

Write for details to
ARMSTRONG PATENTS CO. LTD. BEVERLEY, YORKSHIRE

BAP 9

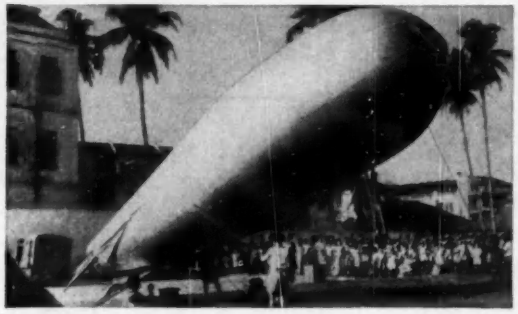

Marconi Surveying Service

LEFT. Balloon operations on the Ipoh-Telok Anson route in Malaya.

RIGHT. The mast is up and the motor generator is running during the survey of the Nigerian multi-channel system.

BELOW. The V.H.F. mobile survey team erect their mast.

Before planning any communication system, and particularly a microwave or V.H.F. multichannel system, a survey of the propagation conditions over the proposed path or area is essential. Similar, but less exhaustive surveys, are also necessary before planning V.H.F. mobile systems. Such surveys are undertaken by Marconi's, one of the very few radio manufacturers who do so. The teams engaged in the work may be called upon to operate in desert, swamp and jungle, over which line and cable routes would be impractical, on windswept moorlands or in densely populated city and surburban areas. Surveys are being, or have already been carried out all over the world, including: Uganda, Kenya, Tanganyika, Nigeria, Ghana, Tangier, Azores, Norway, Turkey, Greece, Malaya, Ceylon, Ecuador, West Indies Sweden, Iran, Angola, and also, of course, in Britain.

Over 80 countries now have Marconi-equipped telegraph and communications services. Many of these are still giving trouble-free service after more than twenty years in operation.

Lifeline of communication

MARCONI

COMPLETE COMMUNICATION SYSTEMS

Surveyed, planned, installed, maintained

MARCONI'S WIRELESS TELEGRAPH CO. LTD., CHELMSFORD, ESSEX, ENGLAND

LC10

'B-W' TINNING & METAL POTS & TANKS

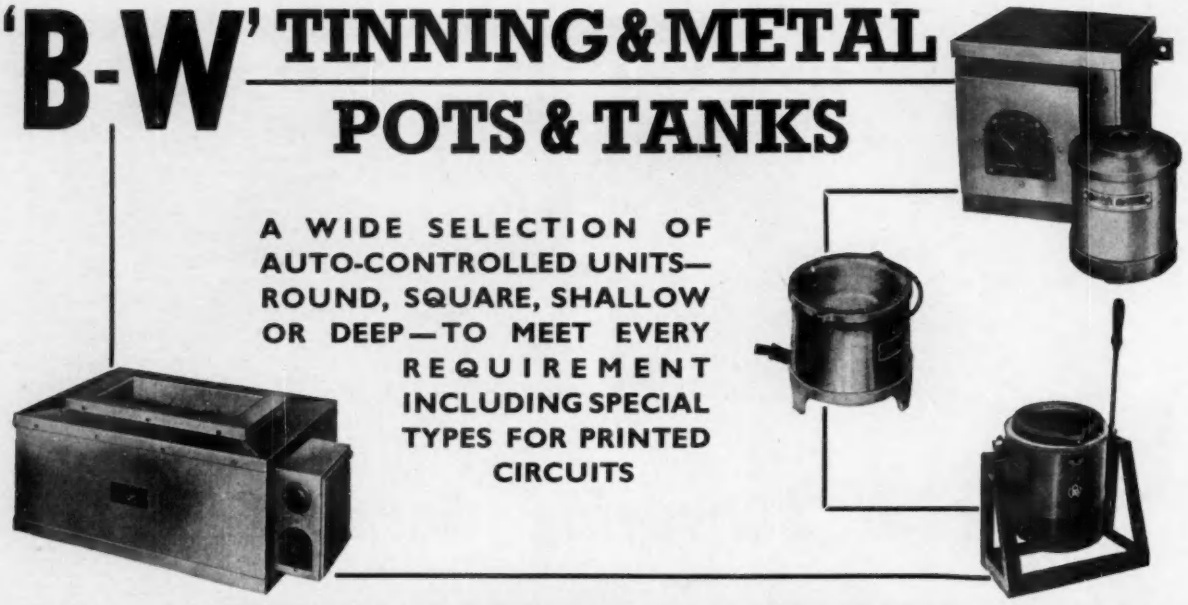

A WIDE SELECTION OF AUTO-CONTROLLED UNITS— ROUND, SQUARE, SHALLOW OR DEEP—TO MEET EVERY REQUIREMENT INCLUDING SPECIAL TYPES FOR PRINTED CIRCUITS

Write for further details quoting reference 3 RQ.

Barlow-Whitney LTD

2, DORSET SQ., LONDON, N.W.1. TEL: AMBASSADOR 5485. WORKS: LONDON & BLETCHLEY

BMJ

FREQUENCY MODULATION

By A. W. Keen, M.I.R.E., A.M.I.E.E. This is the first book of its kind to provide a compact but comprehensive description of the technicalities of the transmitting and receiving sides of f.m. broadcasting technique. And as a knowledge of this technique is essential since the introduction of v.h.f. broadcasting, the book covers the subject from the viewpoint of the practising radio engineer and designer. Simple and straightforward, with a minimum of mathematics, it forms an essential guide book to the subject. Illus. From booksellers, 30/- net.

PITMAN *technical books*
Parker St., Kingsway, London, WC2

The MICROBENCH

TYPE 3930



'X' BAND MICROWAVE TEST BENCH

For routine component testing

Write for Leaflet ED21/22

MICROWAVE INSTRUMENTS LIMITED
WEST CHIRTON INDUSTRIAL ESTATE, NORTH SHIELDS, NORTHUMBERLAND.

3606/7

INSTRUMENTS, ELECTRONICS & AUTOMATION

When you have a problem in HIGH SPEED SWITCHING, CONTROL, AMPLIFICATION, IMPULSE REPETITION or MULTI-POINT SWITCHING —

there is no question about the two components that will go farther than others towards giving you the efficiency you *must* have —

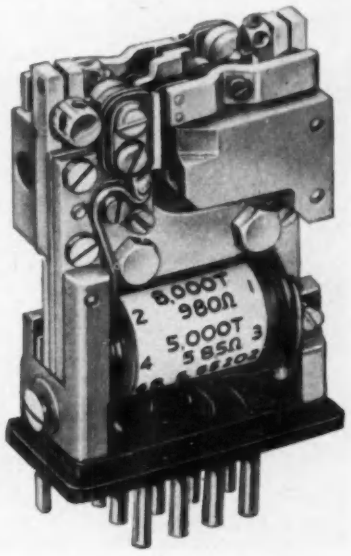

THE CARPENTER POLARIZED RELAY

It operates quickly on extremely short, weak or ill-defined impulses of varying polarity — has a close operate/release differential and retains accurate adjustment for long periods in wide variations of temperature, acceleration and vibration. Five basic types are available in a series of specialized versions, with a wide range of single and multiple windings.

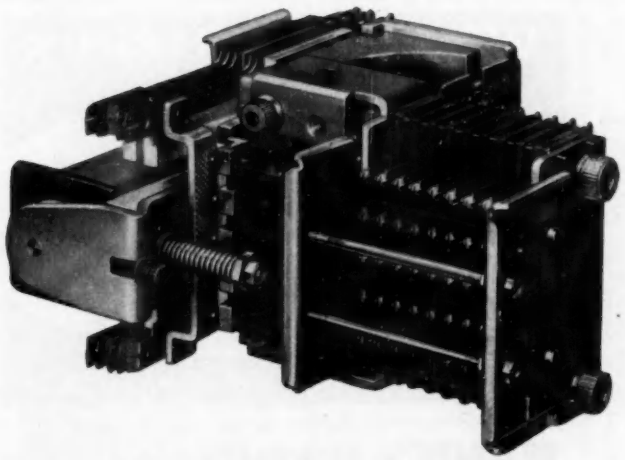

T.M.C. CROSSBAR BRIDGE

A compact, versatile multi-point switching unit. Comprising 5 banks of 8 make-contacts, one unit can select any 1 of 5 points or, in association with a simple change-over relay, any 1 of 10 points (4-way). Two or more Bridges can provide multiple outlets, and, interacting electrically, can provide complex counting and stepping facilities. For multi-point switching in *Telemetering, Process Control, Serial testing* equipment, etc. the Bridge has many advantages to offer.

TMC TRADE MARK

write for technical data to

TELEPHONE MANUFACTURING COMPANY LIMITED

Hollingsworth Works · Martell Road · West Dulwich, S.E.21 · Telephone: GIPsy Hill 2211

HPQ

VITREOSIL FUSED QUARTZ

FOR SEMI-CONDUCTOR WORK

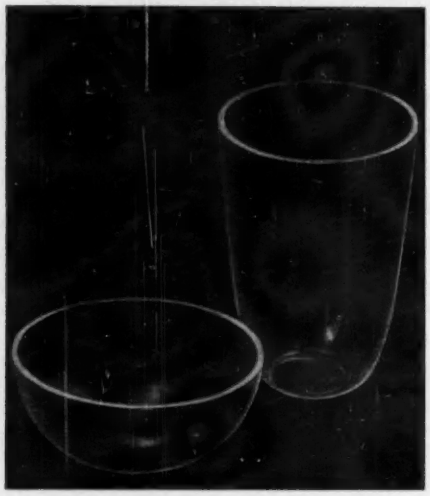

High purity fused quartz (H.P.Q.) boats, crucibles and tubes are available for preparation of hyper-pure silicon. They have an exceedingly low content of boron, aluminium and other elements detrimental to semi-conductors.

We also manufacture an extensive range of Vitreosil Industrial Ware

THE THERMAL SYNDICATE LTD.

TSL

P.O. Box No. 6
WALLSEND, NORTHUMBERLAND
Telephones: Wallsend 6-3242

LONDON:
12-14, Old Pye St., Westminster, S.W.1
Telephone: ABBey 5469

RELAYS

P.O. TYPES MANUFACTURED TO YOUR SPECIFICATION

PROMPT DELIVERY

3000 TYPES

COILS up to 80,000Ω.
CONTACTS up to 8 c/o's
Tropicalizing and impregnating to order.
600 and HIGH-SPEED TYPES also Supplied.



LARGE STOCKS OF KEYSWITCHES

THE KEYSWITCH CO.
ALL POST OFFICE EQUIPMENT
Enquiries to Sales Manager
126 KENSAL ROAD, LONDON, W.10
Telephone: LAD. 0666, 4640 *Grams: "Fonequipt", London, W.10*

WEATHERSHIELDS LTD.

for

SHEET METAL WORK
WELDINGS, PRESSINGS
FABRICATIONS

Send us your enquiries:-

BISHOP STREET · BIRMINGHAM 5

WEBB'S RADIO

the London Agents for

EDDYSTONE

From the smallest component to Communications Receivers

Models "680X"—"750"—"840A"
(30Mc/s to 500Kc/s)

Models "770U"—"770R"
(150—500Mc/s) - (19—165Mc/s)

Also the latest addition to the EDDYSTONE range

The **"870"—£34:16:0**
inc. P. Tax

Gives efficient broadcast reception on short, medium and long waves. The "870" offers full EDDYSTONE specification and reliability at a very reasonable price.

Shop Hours: 9.00 to 5.30 (7.00 p.m. Thursday) and 9.00 to 1.00 Saturdays

WEBB'S Radio

14 SOHO STREET, LONDON, W.1. TELEPHONE: GERrard 2089

Flawless

No, we shall not be silly and claim that our castings are as flawless as a piece of 16th century Venetian Glass. But we can go this far: we can say that just as the old master craftsmen got great satisfaction out of doing a job as well as it could possibly be done, so do we. That is why so many customers whose castings must have a fine skin which will readily anodise put their trust in Great Bridge Foundries

PRECISION CASTINGS IN ALUMINIUM, GUN METAL, GREY IRON, ETC. TO ALL SPECIFICATIONS

Phos. bronze and gun metal solid and cored sticks always in stock

THE GREAT BRIDGE FOUNDRY CO. LTD.

Sheepwash Lane - Great Bridge - Tipton
Staffordshire Telephone: TIPton 1540 and 1361
A Member of the Triplex Foundries Group

THE SIGN OF A GOOD CASTING

Q88

Andec LIMITED

TRANSFORMERS LARGE OR SMALL



The illustration is of a 60 KVA Transformer with 5,000 amp. Secondary, with tapped Primary to give secondary voltage variation from 12 volts to 4 volts. Primary tap changes are made with a rotary switch as shown. These Units are designed and tested to BSS 171 where applicable, or appropriate B.S. Specification.



This is a typical example of our "C" Core range. We manufacture both open and hermatically sealed types, wound to customers specifications. This range extends from 10 VA to 1.6 KVA at frequencies up to 2,000 cps.

WHATEVER YOUR NEEDS— OUR TECHNICAL AND DESIGN DEPARTMENTS ARE AT YOUR SERVICE

ANDEC LIMITED

A.I.D., A.R.B., approved
BENNET ROAD · READING · BERKSHIRE
Tel. 82401/2.

ALL TYPES SUPPLIED

CONVENTIONAL METHODS OF FIXING

PRINTED, ETCHED, ANODISED OR MACHINE ENGRAVED

IN METAL OR PLASTIC

★ *BUT IF YOU WANT A QUICK FIX!* — USE STIKFIX ADHESIVE NAMEPLATES

MANUFACTURED BY
RICHARD CHING & SON LTD.
721 NORTH CIRCULAR ROAD, CRICKLEWOOD, LONDON, N.W.2.
TELEPHONES: GLADSTONE 2437 & 0844.

"You can rely on us"

for ELECTRONIC COMPONENTS FROM STOCK

Ring EALING 5737

BELLING LEE · BRIMAR · MULLARD · HUNTS

ERIE RESISTORS 20% 10% 5%
MORGANITE RESISTORS MIDGET TYPE
HIGH STABILITY 1% 2% 5%
WIREWOUND SILICONE & VITREOUS

Large ranges of T.C.C. and HUNTS Capacitors.

POTENTIOMETERS — MORGANITE DUBILIER · EGEN · COLVERN AND MINIATURE TYPES

TRANSFORMERS — *Extensive range and special laboratory types made to specification.*

CINCH · WEARITE · ERIE · COLVERN · BULGIN · T.C.C. · McMURDO · J.B.

CHASSIS, COILS, INSTRUMENTS SPIT STATOR and GANGED CAPACITORS ETC ETC

★ *We specialise in supplying Development Laboratories, Manufacturers, Government Research Labs., etc.* ***CAN WE HELP YOU?***

ILLUSTRATED CATALOGUE AVAILABLE

RADIO SERVICING CO. 82 South Ealing Road, LONDON, W.5

PLASTICS ENGINEERS

The firm with the technical 'know-how'

on FORMING and BENDING



★

ALL MOULDINGS in ACRYLIC, P.V.C. and STYRENE sheeting

★

INTRODUCING! MIDAFOM EXPANDED POLYSTYRENE moulded to your requirements

Full details on request from

MIDAY PLASTICS LTD

PLASTICS UNIT: 34, HOXTON SQUARE, LONDON, N.1

Telephone: SHOreditch 7433/7373

RELAYS P.O. TYPE 3000



BUILT TO YOUR SPECIFICATION

QUICK DELIVERY

KEEN PRICES

CONTACTS UP TO 8 CHANGE OVER

KEY SWITCHES
PROMPT DELIVERY ALL TYPES UP TO 4CO/6CO



MINIATURE RELAYS
Siemens High Speed. Sealed

2.2 Ω + 1700 Ω	2.2 Ω 1 C O		H96A	17/6
	1700 Ω 1 C O		H96E	25/-
S.T.C. Sealed.				
700 Ω		1 make heavy duty	4186ED	19/6
700 Ω		2 Change Over	4184GD	19/6
2700 Ω		2 Change Over	4184GE	22/6
G.E.C.		Sealed.		
670 Ω		2 make 2 break	SM5H12	25/-
2500 Ω		1 Change Over	SM5N18	25/-
T.M.C. Carpenter Relays				
330 Ω + 850 Ω	1040 Ω + 2680 Ω		4B21 5M32A	75/- 45/-
300 Ω	700 Ω		5XA24	45/-

All available from stock.



ELECTRO-MAGNETIC COUNTERS

COUNTING UP TO 9999

TYPE 16A	TYPE 17A
2300 ohms	3 ohms
75/230 V. D.C.	2/6 V. D.C.
15/- each	15/- each

HIGH SPEED TYPE 108C 2300 ohms. 30/-

Phone: CRO 0839

L. WILKINSON (CROYDON) LTD.
19, LANSDOWNE ROAD, CROYDON

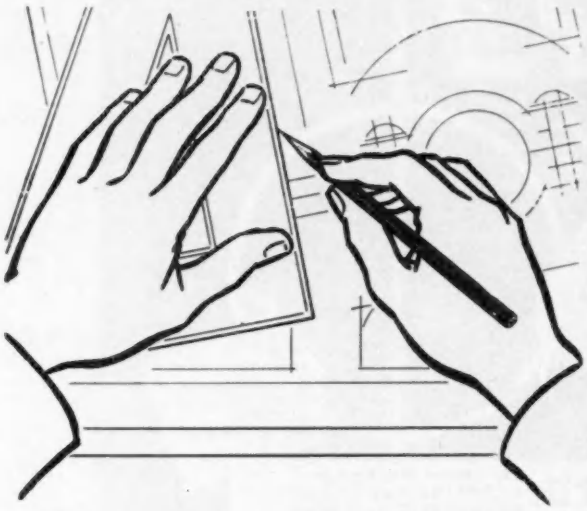

"To a chap like me –
and I'm proud of my work – my pencil's
my living.
The pencils I use have to stand up to fast
hard work, their grading's got to
be absolutely spot on – not almost
or nearly but bang on the dot every
time.
The leads must hold their points
and flow smoothly throughout a long line –
no crumbling or 'clinkers' mark you! –
and if I erase a line it must go cleanly –
there's no 'furrow' left in my paper
so you won't find ghost lines in prints
made off my drawings. As a matter of
fact you can tell from a print when it is
my drawing – the print's always first class."

"What pencils do I use?"

"Venus drawing pencils of course, the ones
with the crackle finish! – how else
do you think I keep up my high standard?"

VENUS
DRAWING
PENCILS

* VENUS *Drawing Pencils are made in 17 accurate grades from 9H to 6B.*

THE VENUS PENCIL CO., LTD., LOWER CLAPTON ROAD, LONDON E.5

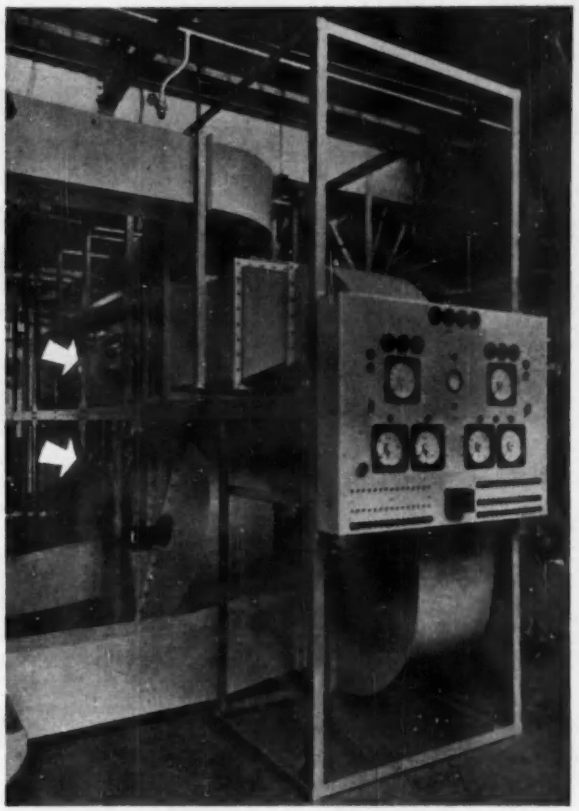

Fans for all electronic duties

The 1900-valve analogue computor made by Elliott Bros. (London) Ltd. for the Long Range Weapons Establishment, Australia, is fully air conditioned. Four 19 in. two-stage Woods Aerofoil fans (above). In contrast, aircraft electronic equipment is being fitted with Woods 2.4 in. 400 c.p.s. fan.

May we send you Woods Small Fan Catalogue V3695?

Axial fans, 4½", 6", 7½", 8½" and larger.



2.4" 400 c.p.s. fan.



Two stage axial fans 7½" and larger.

Centrifugal fans, 3", 4½", 7".

WOODS of COLCHESTER Ltd.

BRAISWICK WORKS, COLCHESTER

Telephone Colchester 5111
Fan manufacturers since 1909

AN ASSOCIATE COMPANY OF THE GENERAL ELECTRIC Co. Ltd., OF ENGLAND

NARITE
-acclaimed

THE GREATEST **ADVANCE** IN DIE-METAL TECHNIQUE

HEAT-TREATMENT
SCORE MARKS
SCUFFING
GALLING
ELIMINATED

N.C. ASHTON LTD. ST. ANDREW'S ROAD HUDDERSFIELD ENGLAND HUDDERSFIELD 6263/4

CW 2575

MINIATURE MICROPHONE LOUDSPEAKER

6300—Ω

Leaflets on Demand

TRIANON - ELECTRIC

96, COBBOLD ROAD, LONDON, N.W.10

WIL 2116



"Q-MAX" MODEL G.D.O.—1A GRID DIP OSCILLATOR

is an ideal instrument for the determination of tuned circuit resonant frequency, tuning transmitters without application of power, for the determination of coil mutual and stray inductances and both fixed and stray capacitances Covers 1.5 to 300 Mc/s. in eight ranges. PRICE **15 Gns.** Complete.

"Q-MAX" CHASSIS CUTTERS

The easiest and quickest way of cutting holes in **SHEET METAL.**

		each
⅝"	(a)	12/9
¾" or ⅞"	(a)	13/9
1", 1⅛" or 1¼" ...	(b)	16/-
1⅜" or 1½"	(b)	18/-
1¾"	(b)	20/6
2⅛"	(c)	33/6
2½"	(c)	38/6
1" square	(b)	25/6

Keys (a)—1/-; (b)—1/6; (c)—2/3.



Patent No. 619178

40 Page FULLY ILLUSTRATED CATALOGUE of Electronic and Hi-Fi Equipment free on application

BERRY'S RADIO

25, HIGH HOLBORN, LONDON, W.C.I.

Tel.: HOLborn 6231/2

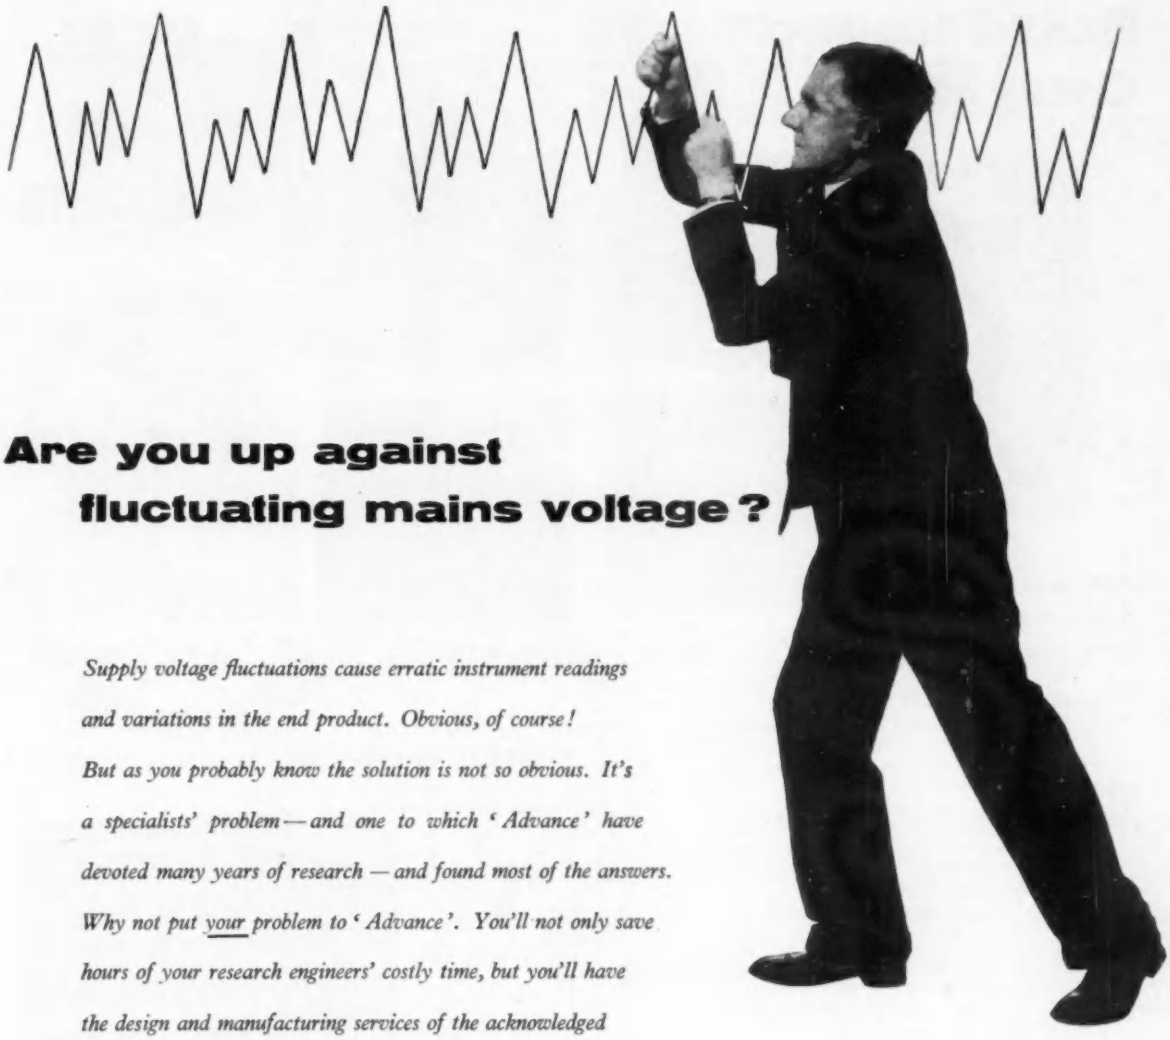

Are you up against fluctuating mains voltage?

Supply voltage fluctuations cause erratic instrument readings and variations in the end product. Obvious, of course! But as you probably know the solution is not so obvious. It's a specialists' problem — and one to which 'Advance' have devoted many years of research — and found most of the answers. Why not put your problem to 'Advance'. You'll not only save hours of your research engineers' costly time, but you'll have the design and manufacturing services of the acknowledged authority on voltage fluctuation problems.

Advance can help you

CVT

CONSTANT VOLTAGE TRANSFORMERS

Full technical details available — Leaflet M 54

ADVANCE COMPONENTS LIMITED

ROEBUCK ROAD · HAINAULT · ILFORD · ESSEX

Telephone : Hainault 4444

GD12

BEAT-FREQUENCY OSCILLATOR

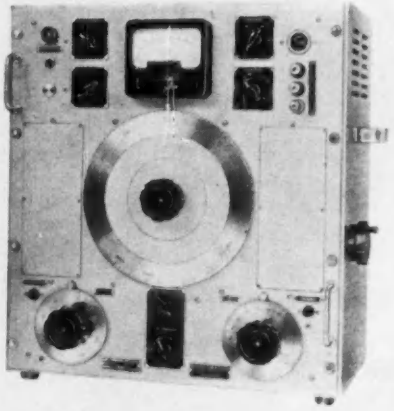

Type **HO12**

2$_1$ cps to 20 kc/s and 20 kc/s to 40 kc/s

FREQUENCY ACCURACY:
0·5% + 1 cps.

FREQUENCY STABILITY:
3 cps per hour after 5 min. warm-up.
Less than 1 cps change from 5% line voltage variation.

OUTPUT:
Max. 6 Watts output power. 10μV to 50V from built-in attenuator. Residual hum below 0.1%. Distortion at 1 watt output less than 0.2% at 1000 cps and less than 1% above 80 cps.

OUTPUT IMPEDANCES:
5, 25, 150, 600, 2500, and 10000 ohms.

Large easy-to-read 20" individually engraved frequency dial linear from 0 to 100 cps and logarithmic to 20 kc/s. Incremental 300 cps dial with 2 cps divisions.

Provisions for remote control of output and for connection to Recorder Type NS3 which uses frequency calibrated recording paper.

SPECIAL DESIGNS with built-in warbling device and/or 1 Mc/s amplitude modulated oscillator (up to 100% AM with 2% distion.

Radiometer supplies:
AF OSCILLATORS
R-L-C BRIDGES
STANDARD-SIGNAL GENERATORS
VACUUM TUBE VOLTMETERS
WAVE ANALYSERS

RADIOMETER

72 Emdrupvej, Copenhagen, NV-3, Denmark

Represented in Great Britain by
Livingston Laboratories Ltd.
Retcar Street, London, N.19.

Jackson Brothers Butterfly Vane Trimmer, type C711/719, with capacity of up to 65 P.F. with 0.015 in. air gap (each half) and up to 15 P.F. with 0.045 in. air gap (each half).



C711/719

NEW RANGE OF TRIMMERS

It's reliable . . . if it is made by

JACKSON BROS. (LONDON) LTD



C701/709

Jackson Brothers Trimmer, type C701/709. Differential Condensers with capacities of up to 150 P.F. with 0.015 in. air gap (each half) and up to 30 P.F. with 0.045 in. air gap (each half).

KINGSWAY · WADDON · SURREY Telephone Croydon 2754/5

THE **"54"** DRAWER UNIT

ALL STEEL
Stove Enamelled
BRONZE GREEN

•

OVERALL SIZE
42" HIGH
36" WIDE
12" DEEP

•

Contains 54 of these drawers, each 5" wide 3" high 11½" long.
54 dividers and 54 drawer cards with each unit. Extra divider 6d. each.



£18 DELIVERED FREE U.K.

SEND FOR SAMPLE DRAWER

N. C. BROWN LTD.
EQUIPMENT WING . HEYWOOD . LANCS.
Telephone: 69018/9 (3 *lines*)



WODEN
TRANSFORMER CO. LTD

TRANSFORMERS









CAST RESIN TRANSFORMERS
Give complete mechanical and climatic protection for core and windings. Good heat dissipation.

HERMETICALLY SEALED 'C' CORE UNITS
A complete range covering transformers from 1 Va to 2 kVA and the usual range of chokes.

POTTED COMPOUND FILLED TRANSFORMERS
A wide range of capacities for transformers and chokes, complete reliability. Suitable for exacting industrial and climatic conditions.

SHROUDED AND OPEN-TYPE TRANSFORMERS
Combines first-class engineering with a popular highly Competitive product. Vacuum impregnated and rigidly tested.

MICROPHONE TRANSFORMER
For use with moving coil microphone, minimum hum, pick-up and maximum efficiency.

In addition to the types shown we manufacture a great variety of Transformers for all electronic applications. Also Power Transformers up to 750 kVA.

WODEN TRANSFORMER CO LTD
BILSTON STAFFS Telephone: BILSTON 41959

Catalogues available on request.

SM/W2683

TAKE YOUR PICK

Our wide range of capacitors, incorporating all the very latest developments, are described fully in these new leaflets . . .

SEND NOW for COPIES

DALY has succeeded in maintaining full capacity values and working voltages in more compact designs, specially suited to ultra-modern equipment:

PHOTO-FLASH EQUIPMENT · DEAF AIDS
PRIVATE TELEPHONE INSTALLATIONS
AMPLIFIERS • D.C. POWER UNITS
TRANSISTOR EQUIPMENT
MAGNETISATION EQUIPMENT
TEST GEAR

DALY
ELECTROLYTIC CAPACITORS

Condenser Specialists for over 20 years.

DALY *(Condensers)* **LTD.,** WEST LODGE WORKS,
THE GREEN, EALING, LONDON, W.5. PHONE: EALING 3127-8-9. CABLES: DALCYON, LONDON

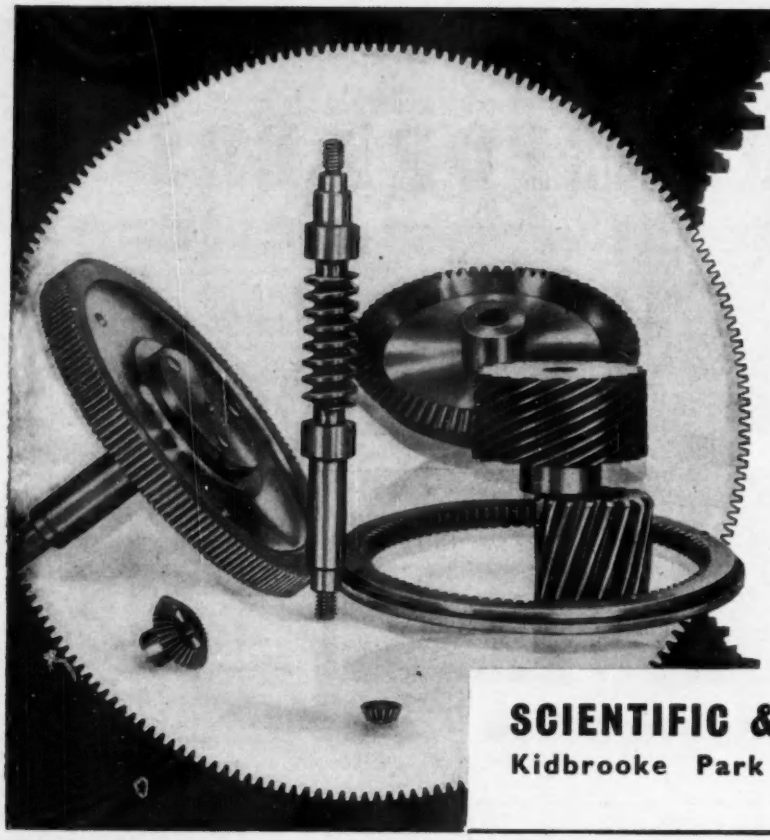

GEARS and ASSEMBLIES

TO DIRECTORATE OF NAVAL ORDNANCE CLASS 1 AS SUPPLIED TO LEADING RADAR AND ELECTRONIC FIRMS

All supplies are subjected to a rigid system of inspection, assisted by a complete range of up-to-date instrument proving equipment.

SCIENTIFIC & PROJECTIONS LTD.
Kidbrooke Park Road, Kidbrooke, S.E.3
Telephone: LEE GREEN 2112

WAVEMETER TYPE 16/7

SPECIFICATION

Mode of operation	TE01	Calibration accuracy	1 Mc/s
Waveguide	No. 16		5 Mc/s
Q unloaded	30,000	Discrimination	200 Kc/s
Q loaded	10,000	Micrometer Divisions	0.0002"
Frequency range	8.5 KMc/s to 12.5 KMc/s, 8.5–10 KMc/s, 10–12.5 KMc/s		

PRICE **£65** (in the U.K.)
DELIVERY TWO MONTHS OR LESS
other details on request

Precision Instruments are made in all Waveguides from No. 10–22

FLANN MICROWAVE INSTRUMENTS LTD.
133 Munster Road, Teddington, Middlesex, England.
Telephone No.: Kingston 7217

FBC
MINIATURE
BEARINGS

range in size from 1·5 mm. o.d. to 10 mm. o.d. Some are made with open cups which allow clearance for spindle extensions, ranging from 0·25 to 2 mm. Full particulars and sizes are available on application.

The bearings illustrated are actual size.

ALL-BRITISH FBC *F.B.C. FISCHER Regd. Trade Marks*

FISCHER BEARINGS CO. LTD. WOLVERHAMPTON

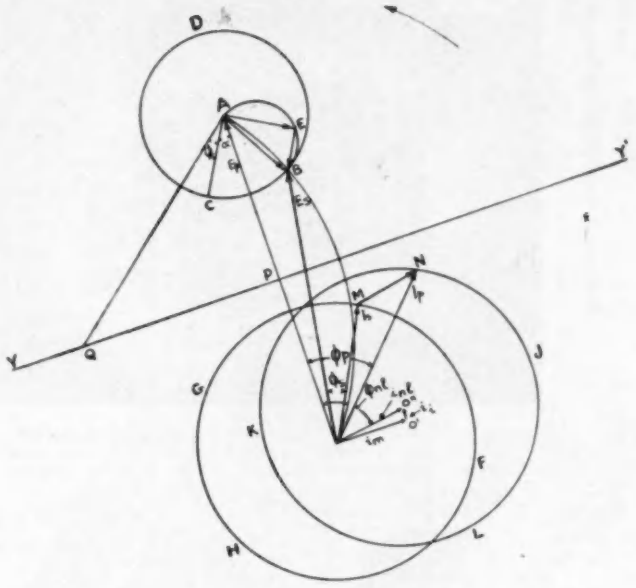

absolutely

Gardneristic

For years, Gardners have been developing a consistent design and manufacturing policy resulting in more than 600 different types of transformers and chokes being available, usually for 'return of post' despatch. Such a service, coupled with the wide range of designs, and the outstanding reliability of the product is, for want of a better couple of words, absolutely Gardneristic.

Gardners **TRANSFORMERS & CHOKES**

are fully described in a loose-leaf catalogue we shall be delighted to send you by return of post.

GARDNERS RADIO LTD., SOMERFORD, CHRISTCHURCH, HANTS. ***Tel.*** **CHRISTCHURCH 1024**

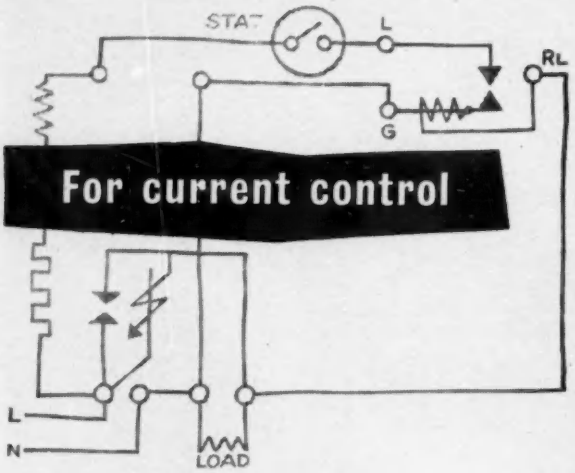

...SPECIFY SUNVIC

Sunvic components are widely used for controlling equipment such as moulding presses, furnaces, incubators, chemical plant, etc. Together with the Sunvic potentiometric recorder they also have numerous applications in scientific and industrial research particularly for measuring, controlling and recording temperature and small electrical quantities.

If you have a specific problem or would like technical information on any or all Sunvic components, please contact Sunvic Controls Ltd., P.O. Box 1, Harlow, Essex. Tel: Harlow 25271.



ADJUSTABLE BIMETAL THERMOSTATS

Sunvic TS thermostats are operated by a bimetal strip wound into the form of a helix. Can be used to control temperatures of up to 300°C. (570°F.) for a variety of applications in research and industry. Models available for air temperature control of rooms, cold storage and drying chambers, for oven control and general laboratory work, and with a sensitivity of ±1/10°C. for very accurate control.

ENERGY REGULATORS

The Sunvic energy regulator effects its control by periodically switching on and off the power, the ratio of the on-time to the total time determining the average power input, which is continuously variable. Available in several forms with a continuous rating of 1kW at 230V. A.C.; also supplied with an HVS relay for larger loads.

HOTWIRE VACUUM SWITCH (HVS) TUBES AND RELAYS

Available either as a loose tube for switching up to 10 kW at 400V. A.C. or D.C. or as a complete relay either enclosed in a plastic box or mounted on a paxolin base for incorporation in customer's own equipment. For single—or three-phase A.C. applications. Advantages are: no arcing; silent operation; low, non-inductive operating current; A.C. or D.C.; inductive or non-inductive loads

SUNVIC

An A.E.I. Company

Control and research equipment for science and industry

relays, thermostats, time delays, energy regulators, D.C. amplifiers and potentiometric recorders

SC/68

LONDEX

midget relays

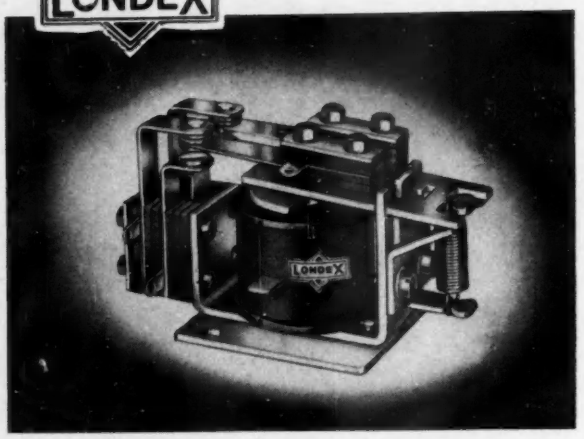

Londex midget relays, made to the highest standards, are designed for incorporation in electronic equipment and business machines or in other types of industrial control mechanisms where space and weight are limited.

COILS available for A.C. or D.C. working Continuously rated.

CONTACTS make and break or changeover. Maximum, 3 sets of changeover.

LONDEX LTD.

Anerley Works, London, S.E.20. Sydenham 3111

SAIA SYNCHRONOUS MOTORS

(Swiss made)

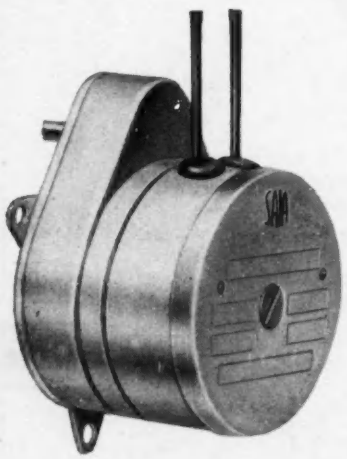

for time switches, timers, signal installations, time lag relays, recorder chart feeds and similar apparatus. This motor has many advantages: solid construction, instant starting, slow running and thus minimum wear, faultless self-lubricating rotor bearings, highest possible torque, wide choice of speeds, dust and splash-proof, no maintenance required.

FRED FERRARIS (Clerkenwell) LTD.

Instrument Makers, Design, Prototype & Production.

14, NORTHAMPTON SQUARE, LONDON, E.C.1.

Telephone: Clerkenwell 2676/7.

Are you kicking over the traces?

You cannot afford to waste man hours, to use highly trained personnel for tedious routine jobs when they could be better employed.

SINDAK DATA REDUCTION EQUIPMENT
for the analysis of recorded data in bulk or on a small scale saves time, trouble and expense.

THE K1020 OFFERS THESE FEATURES
Rapid and convenient handling of film or paper charts up to 6 inches in width. Comprehensive linear and non-linear calibration facilities. Positive and negative readings about zero. Zero adjustable over full record width. Digital output in actual physical units. Visual Display for "quick look" purposes. Permanent record by typewriter, tape or card punch.

This system can also be used as a direct Digitiser on any Analogue voltage source. **The K1015** provides a simpler system of output in a fixed digital scale of 1,000 units.

K1020 TRACE READING EQUIPMENT
Designed for the rapid analysis and reduction of Analogue data to Digital form.

sindak EQUIPMENT FOR CALCULATION AND ANALYSIS

SOUTHERN INSTRUMENTS COMPUTER DIVISION · CAMBERLEY · SURREY TELEPHONE: CAMBERLEY 2230

POLY · TETRA · FLUORO · ETHYLENE

FLUON
P.T.F.E.
TEFLON

Components

FOR

ELECTRONIC - RADIO & TELECOMMUNICATION INDUSTRIES

★ **FABRICATIONS**
★ **MOULDINGS**
★ **EXTRUSIONS**
★ **COATINGS**

For some years Henry and Thomas have been one of the leaders in designing and producing specialised components in P T F E

STANDARD PRODUCTION INCLUDES

VALVEHOLDERS • TUNING COILS
INSULATORS • WASHERS • SEALS
• SWITCHES • CRYSTAL HOLDERS
• AERIAL MOUNTINGS

and many items for specialised application

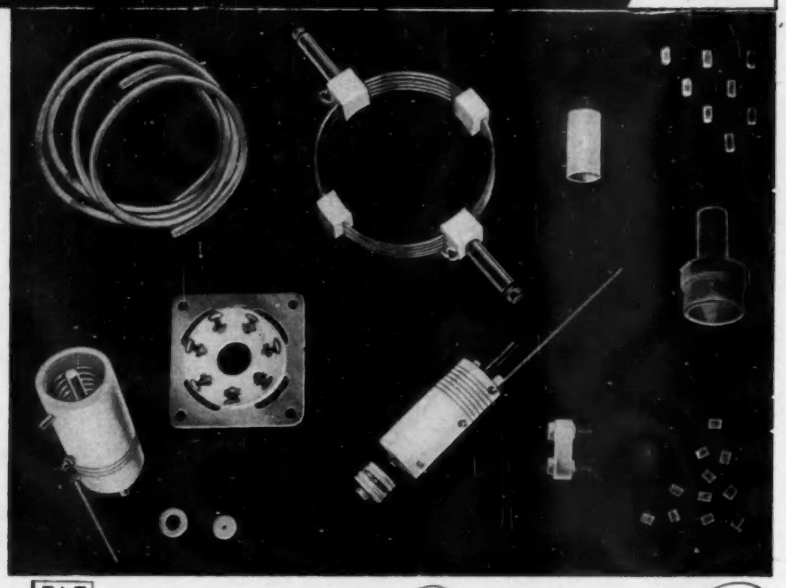

Henry and Thomas Ltd

YEO STREET · BOW COMMON · LONDON · E.3
Telephone No.: EAST 4545.

H. T. NEWTON & CO.

SPECIALISTS TO THE ELECTRICAL AND ELECTRONIC INDUSTRIES

Electrical and Electronic Equipment, Switches, Plugs, Sockets (Over a million in stock—IMMEDIATE DELIVERY), Relays, Fuses, Connectors, Distribution Boxes, Radio & Radar Components, Instruments and Test Gear.

A.I.D. and A.R.B. approved

Contractors to H.M. and Foreign Governments

GATWICK AIRPORT
HORLEY - SURREY

Telephone: HORLEY 1510 & 3613
Telegrams: NEWTONAIR HORLEY

★

You can see why appliances which MUST be absolutely reliable in operation are fitted with

Drayton HYDROFLEX metal bellows

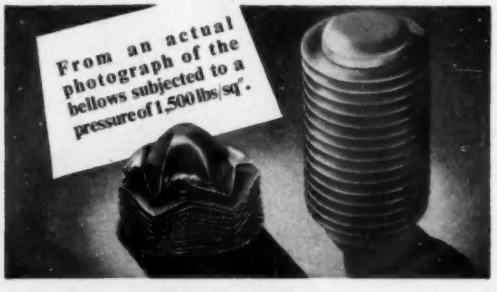

An instrument manufacturer writes:

"We think you might be interested in the enclosed bellows which were subjected to a violently fluctuating pressure of 1,500 lbs/sq" as the result of a technical hitch. The bellows did not leak which we think is a very great tribute to their manufacture".

★ HYDROFLEX metal bellows are suitable for all thermostatic and pressure sensitive applications. Write for List No. M. 800-1

B.17

The Drayton Regulator & Instrument Co. Ltd., West Drayton, Middlesex

*REGD. TRADE-MARKS

*ZENITH

NEW and IMPROVED *"VARIACS" at REDUCED PRICES!

Due to increased demand, up-to-date design practice and modern production methods, we are able to announce substantial *price reductions* on most "VARIAC" models.

All "VARIAC"-*DURATRAK Transformers have a brush track treated in accordance with British Patent No. 693406, which produces a coating of precious metal alloy on the brush track surface, eliminating the possibility of deterioration due to oxidation, and reducing contact resistance. "VARIACS" with DURATRAK have longer life, increased overload capacity and maximum economy in maintenance.

Our comprehensive catalogue, which covers over 170 models, will be gladly sent on request.

The ZENITH ELECTRIC CO. Ltd.
ZENITH WORKS, VILLIERS ROAD
WILLESDEN GREEN, LONDON, N.W.2
Telephone: WILlesden 6581-5 Telegrams: Voltaohm, Norphone, London

INDIUM

The manufacture of semiconductor devices depends not only on scientific skill and ingenuity but also on a knowledge of the availability of the best raw materials. That is why so many manufacturers are specifying TADANAC INDIUM.

TADANAC INDIUM is a product of The Consolidated Mining & Smelting Co. of Canada Ltd., one of the world's leading INDIUM producers. It is available as 99.97% or 99.999% guaranteed purity, in a variety of alloys and fabricated shapes.

TADANAC INDIUM is supplied in the United Kingdom and Europe by

HENRY GARDNER
AND COMPANY LIMITED

2 METAL EXCHANGE BUILDINGS · LEADENHALL AVENUE · LONDON · E.C.3
Telephone: MANsion House 4521

who are in a position to offer full technical service, backed by the Research Division of the producers.



for every type of resistor

Fine and Superfine Wires, in all sizes, down to .0007" diameter are now readily available. Fully annealed, with either bright or oxydised finish.

A special quality stress-relieved bright finish can also be supplied.

VACROM (Regd.)

80/20 and 15% nickel chrome resistance wires and tapes

All Vactite resistance wires fully comply with the relevant British Standards.

For details and samples write to:-

VACTITE WIRE COMPANY LIMITED

75 ST. SIMON STREET · SALFORD 3 · LANCS

FS LEW LEC VACTITE

When it's a question of

HYDRAULICS

it pays to consult

POWER JACKS

PUMPS

Hand Operated Pump

Motorized Pump for low voltage mains supplies

JACKS



Retraction Jack

Double Acting Jack (Extension and Retraction)

VALVES

2 way or 4 way valves for Hand Operated Pump



Solenoid Valves push open or push closed

HYDRAULIC CLAMPS

This simple, speedy method of work-holding slashes production time and costs

Take advantage of our experience in hydraulics. Send us your problem.

POWER JACKS LIMITED
MAYLANDS AVENUE, HEMEL HEMPSTEAD

Telephone: Boxmoor 3800 Telegrams: Newsorber, Hemel Hempstead

Publication A1/223 sent free on request

RECTIFIERS FOR DC POWER SUPPLIES

Where AC to DC conversion is required, HED Rectifiers have been in use for many years and installations up to 100 kilowatts have been manufactured. These can be supplied as straight Transformer Rectifiers or with Magnetic Amplifier Control giving smooth DC Control outputs over a very wide range. Air Blast or Oil Filled can also be supplied.

Top and Side covers removed

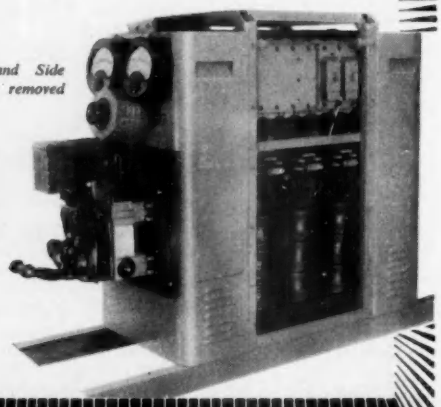

HED

HIRST ELECTRONIC LTD.
GATWICK ROAD, CRAWLEY, SUSSEX

Birch

REGISTERED TRADE MARK

VITREOUS ENAMELLED RESISTORS

FERRULE END TYPE
(JOINT SERVICE — TYPE APPROVED)
9 SIZES — 10 to 250 WATT

Fully vitrified porcelain former, winding 80/20 nickel chrome wire. High rating, liberal safety margin and tolerance.

WIRE END TYPE
7 SIZES — 1½ 30 WATT



Axial or radial leads, tinned, securely fixed to the unit and capable of supporting the weight of the resistor, which can therefore be soldered in to equipment.

The specially developed enamel of these resistors, fuses to an intensely hard, high gloss surface giving complete protection to the winding under the most adverse conditions. The enamel is completely inert at all times and free from crazing, which allows wires of the finest procurable gauges to be safely employed. Hence a wide range of resistance values is available in each size.

Write for List No. 190

Birch

REGISTERED TRADE MARK

H. A. BIRCH & CO. LTD.
WOOD STREET, WILLENHALL, STAFFORDSHIRE
Telephone WILLENHALL 494 495 · Grams WILOHM WILLENHALL
LONDON OFFICE: 1-5 NORTHOLT ROAD, HARROW, MIDDLESEX
Telephone: BYRON 5120

20th. June / 26th. June.

PARIS

SALON INTERNATIONAL DE LA PIÈCE DÉTACHÉE ÉLECTRONIQUE

INTERNATIONAL EXHIBITION OF ELECTRONIC COMPONENTS.

The largest technical display in the world in the field of electronics.

EXHIBITION PARK
PORTE DE VERSAILLES
PARIS
FRANCE

For all enquiries, apply to:
"Commissariat Général du Salon de la Pièce Détachée"
23, rue de Lübeck, PARIS-16e
Téléphone: PASsy 01-16

TELMAG

Strip wound cores

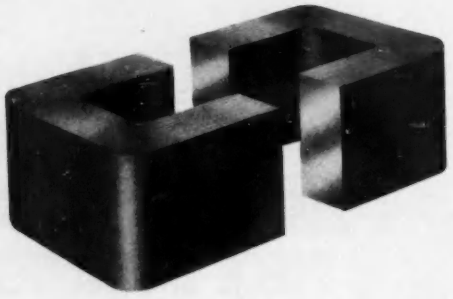

for consistently high performance

Every TELMAG core is tested and guaranteed

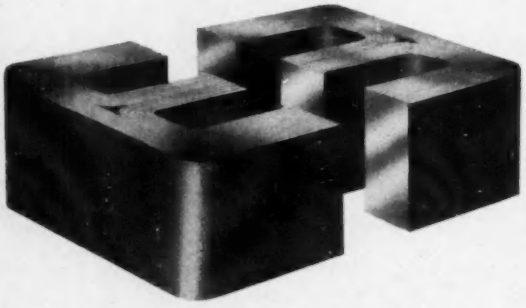

In single and 3-phase transformers

TELMAG OFFER YOU

★ High performance components.
★ A wide range of sizes and types.
★ Rapid delivery.
★ Competitive prices.
★ First-class technical service.

TELMAG are the largest manufacturers of strip wound cores to the Trade in Great Britain, and have exceptional facilities for the production and testing of wound cores in the standard ranges. Specials and prototypes offer no problem; write to us for technical literature indicating the product group in which you are interested.
Banding Tools, Strip and Seals are available ex stock.

You can rely on **TELMAG** *for quality and service*

TELCON-MAGNETIC CORES LIMITED
CHAPELHALL, AIRDRIE, LANARKSHIRE, GREAT BRITAIN. Tel. Airdrie 2283-4.
Telegrams: TELMAG, Airdrie.
A member of the TELCON Organisation

PLASTIC MOULDINGS TO FINER LIMITS

Nylon · Polythene · Polystyrene

C **OMPRESSION** & Injection Moulding
H **IGHLY** experienced Electronic & Design Engineers at your service
E **LECTRONIC** Component Encasement
L **AMINATED** Glass Structures
T **RANSFER** Moulding
O **RIGINAL** Development Design undertaken
N **YLON** Moulding

Spells versatility in plastics

Write for details to

CHELTON *(ELECTROSTATICS)* **LIMITED** *(Plastics Division)*
MARLOW-BUCKS
Telephone / Telegrams: **MARLOW 1065**

PHIL-TROL SOLENOIDS

Range covers types 41 and 42 (front 1" x 1¼") 38, 39 and 40 (front 1½" x 1¾") and power A.C. and D.C. sizes up to 60 inch-lbs.

6 v-460 v A.C. and D.C. types

QUICK DELIVERY
Solenoids are normally despatched same day as receipt of order.

PHILLIPS CONTROL (G.B.), LTD.
Dept. G7, Farnborough, HANTS. ***Tel: Farnborough 1120***

INSULATING SLEEVINGS

P.V.C.
SLEEVINGS
INSULATED WIRES
and FLEXIBLES

A.I.D. AND A.R.B. APPROVED.

PLASTICABLE LIMITED
HAWLEY LANE - FARNBOROUGH - HANTS
PHONE: FARNBOROUGH, HANTS 85

AT EVERY WIRE'S END ... *there's a*

call for COLLETT!

TERMINALS **WIRING ACCESSORIES**

*... **without delay** ... every one of our standard range of over 130 different types is always available from stock!*

*We **specialise** in the supply of terminals, tags and clips. Small quantities? With pleasure! Our 1 gross boxes of high-grade terminals are famous throughout the industry. Please write or phone for catalogue*

S. H. COLLETT Mfg Co Ltd

Electronics Dept., **347 & 349 Gosweil Road, London, EC1 Tel: TERminus 2584**

LGB

Other N.E.P. instruments include different types of recorder, galvanometers, automatic processing machines, carrier systems, etc.

Number of channels : six or twelve
Paper : 120 mm. width, 100 ft. length
Paper speed : .2", .6", 2", 6" per sec. or half, double or quadruple these speeds
Galvanometer range : D.C. to 2,000 c/s

INSTANT RECORDING

without developing
with galvanometer sensitivity

This self-developing recorder will prove a powerful tool in the investigation of your problems such as the measurement of pressures, temperatures, vibration, stresses, etc. It will simplify instrumentation and save valuable time.

N E P

New Electronic Products Ltd
360 Kennington Road London SE11 Telephone: RELiance 5161

CINETRA

Reg'd Design No. 881830

OSCILLOGRAPH RECORDING CAMERA

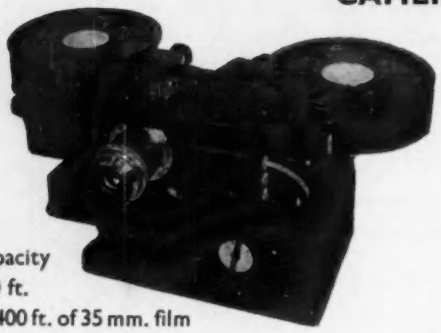

Capacity
200 ft.
or 400 ft. of 35 mm. film

PROTOTYPES—EXPERIMENTAL MODELS
PRECISION GEARING AND SPROCKETS

12, OVAL ROAD, LONDON, N.W.1

Telephone: GULliver 2353/4085

BRASS, COPPER, BRONZE, ALUMINIUM, LIGHT ALLOYS

IN ROD, BAR, SHEET, TUBE, STRIP, WIRE

3000 STANDARD STOCK SIZES

H. ROLLET & CO., LTD.

6 CHESHAM PLACE, LONDON, S.W.1.
SLOane 3463

Works : 36 ROSEBERY AVENUE, LONDON, E.C.1

Branches at LIVERPOOL, MANCHESTER, BIRMINGHAM, LEEDS

"No Quantity too Small"

A.C. SOLENOID TYPE SBM/T

GREATLY INCREASED PERFORMANCE



Continuous 3¾ lbs. at 1"
Instantaneous to 16 lbs.
Same dimensions as Type SB
Smaller sizes available.
Greatly increased discounts for quantities. Also transformers to 7kVA 3 phase

R. A. WEBBER LTD.

18 FOREST ROAD, KINGSWOOD, BRISTOL. PHONE 67-4065

SPUTNIK

The very name Sputnik will cause to be released millions of pounds in the cause of Research and Development. Keep in step with these developments and use

Beryllium Copper Crinkle Washers

Fabricated from Beryllium Copper Strip. The Washers are heat treated and plated. They are non-magnetic, and when plated are 100 per cent corrosion resistant. They have a relatively high electrical conductivity, and will not damage highly polished and plated surfaces to be locked together.

It is used extensively by such industries as Radar, Television, Wireless, Aircraft and the Electrical and Electronics trade in general, and by most Government Departments.

It is approved by the British Admiralty Signal and Radar Establishment, to their Spec. A.110000, also RAE/RSP.318 and by RCSC/RCL.224.

The Washers can be supplied tested and released A.I.D. or A.R.B., and are also supplied in Good Commercial Quality.

A Custom Made Product of special interest to the Electrical and Electronic Industries.

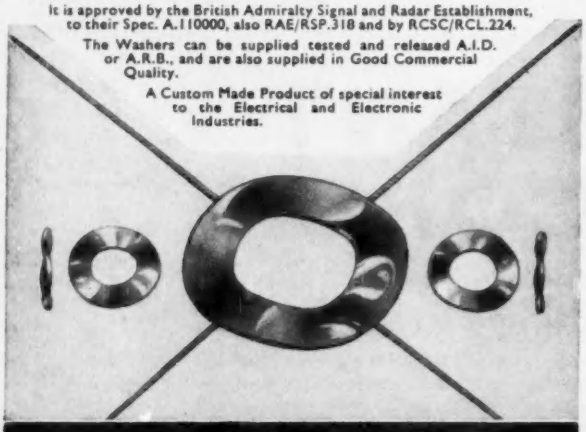

DAVID POWIS & SONS LTD.

FORWARD WORKS SPARKBROOK BIRMINGHAM 11 PHONE VIC 1264-8



the choice

of the discriminating design engineer

30 years of design and manufacturing experience are behind the high standards of reliability and presentation which make Sifam Instruments the natural choice of the discriminating user.

Type M35
Scale length 2.75 ins.

Type M25
Scale length 1.9 ins.

Type M40
Scale length 3.4 ins.

Type M20
Scale length 1.6 ins.

The Instruments shown here are only a small selection from a range as renowned for its extent and flexibility as for its reliability and accuracy. The Sifam Technical Representative will be glad to call and discuss your instrumentation needs.

Write now for comprehensive data Sheets covering your requirements.

SIFAM ENGLAND

SIFAM ELECTRICAL INSTRUMENT CO. LTD. Leigh Court, Higher Lincombe Road, Torquay, Devon. *Torquay 4547/8.*

LATEST CONTRIBUTION TO ELECTRONICS

EG PRODUCTS



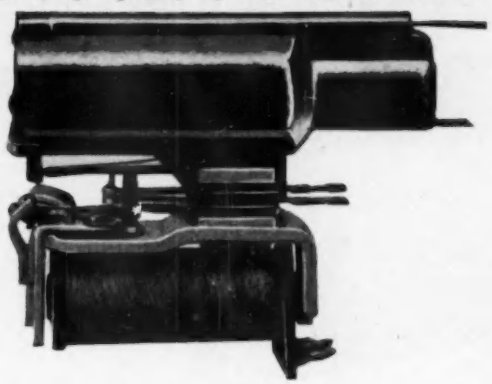

By combining the newly developed Vacuum Switch illustrated with our Series 'G' miniature telephone type relay an extremely compact and efficient unit is available for the control of high voltages. Up to 2Kv A.C. or D.C. at 2Kw, can be directly switched. Alternatively the normal spring contact assembly can be fitted with up to six change over contacts. A hermetically sealed version can also be supplied.

Write for leaflets M.T.R. for full details.

STOP PRESS

EX-STOCK

STANDARD TYPES OF MERCURY RELAYS & CONTACTORS

CURRENT RATINGS from 5 to 60A SINGLE DOUBLE & TRIPLE POLE

AVAILABLE

★

OTHER PRODUCTS INCLUDE

Diesel Alternator Automatic Control Panels. 'Off Peak' Tariff Units. 'On Demand' Diesel Alternator Panels. Air Operated Switches. Zebra Flashers M.O.T. Approved. Miniature Contact Thermometers. Mercury Switches. Miniature Plug in A.C. and D.C. Relays. Adjustable Contact Thermometers. Voltage and Current Sensitive Relays. Contactors up to 150 A.C. Test Sets and Control Consoles. 'Mains Failure' Relays. Time Delay Relays. Special Automatic Control Panels. Automatic D.C. Fluorescent Lamp Change Over Units. Miniature Telephone Type Relays G. Series. No Volt Protection Timing Relay. Diesel Repeat Starting Unit. Laundry Machines Reversing Unit. Grain Drier Control Unit. Transformer Protection Relay Switches. 'Delay-Make' Cascade Timing Relays. Earth Leakage Relays. Impulse Expander Units. Electrical and Hand Reset Relays. Balanced Two Coil Differential Relays. 'MK.2' EG. Relay. 'H' Series Relay. Control Panels to Specification. Vacuum Switch.

ENGEL & GIBBS LTD

WARWICK ROAD · BOREHAM WOOD · ELSTREE · HERTS. Tel.: ELStree 2291/4

Rejafix

MODEL ESSEX S2/FA
Fully Automatic Machine specially designed for printing automatically small resistors with wires attached.

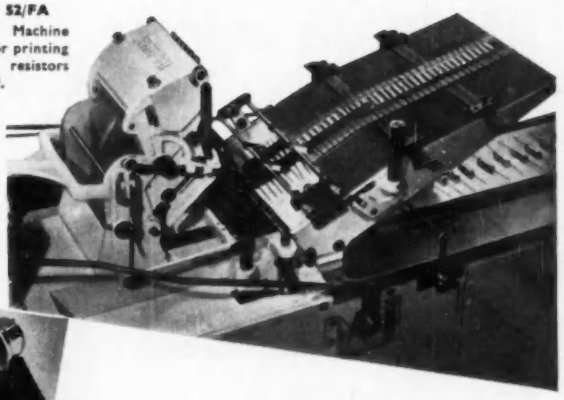

COMBINED MARKING & PRINTING EQUIPMENT

• ***As used by Leading Manufacturers throughout the World.***

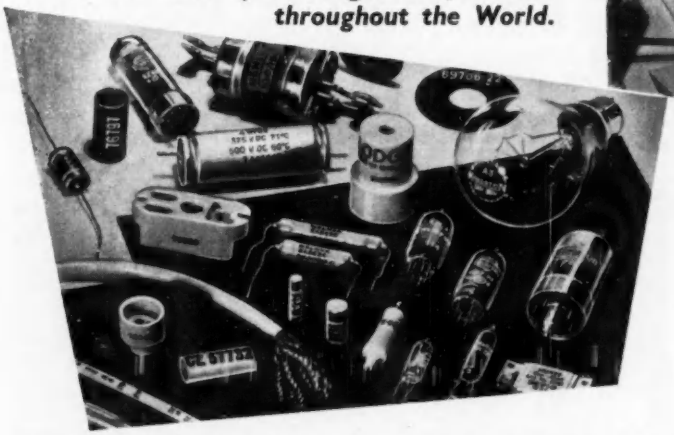

The Rejafix Machine will print on any shape and on any material as well as paper, cardboard, fabrics, etc.

• *SIMPLE TO OPERATE* • *ECONOMICAL TO RUN* • *CLEAR PRINTING IN LONG RUNS*

REJAFIX LIMITED 81-83 FULHAM HIGH STREET · LONDON · S.W.6.

Telephone : RENown 5802-3-4 · Telegrams : Rejafix, Walgreen, London · Cables : Rejafix, London

STOCKISTS IN MOST COUNTRIES

HILTON | Timers | Delay Relays | Relays

ELECTRONIC PROCESS TIMERS FOR AUTOMATION

EFFICIENT, COMPACT AND ECONOMICAL



FOR INFORMATIVE SWITCHING AND POWER HANDLING

AIDS TO PRODUCTION

HILTON ELECTRIC CO., LTD.

52 POOL ST · WOLVERHAMPTON ·

PHONE 22783 ·

All the experts use—

HENLEY SOLON

TRADE MARK

ELECTRIC SOLDERING IRONS

★ *Reliable*
★ *Speedy*
★ *Long-lasting*

A model for every purpose

65 watt round pencil bit

Leaflets on request from:

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.

51-53 Hatton Garden, London, E.C.1

Tel: CHAncery 6822

FOR 25 YEARS THE BEST

MAGSLIPS *For delivery ex stock from:—* SERVO AND ELECTRONIC SALES LTD., 1, HOPTON PARADE, STREATHAM HIGH RD., LONDON, S.W.16. Tel: STReatham 6165

	AP1372	AP10428	AP10855			
Transmitter	AP6547	AP10852	AP11100	AP6550		AP10738
F.T.S. Transmitter		AP11101 AP10456				
SY-L Transmitter		AP10637		AP10638	AP10866 OS3713A	AP11123
Coincidence Transmitter	AP10429		AP10636	AP10682	AP10739	AP11112
X-CO Transmitter		AP10747			AP10952	
F.T. Transmitter	AP10687		AP10689	AP10741	AP10742	AP10742M
Hunter incdg.	AP3948	AP6548B	AP10854			
S.A. Hunter	AP6548	AP10731	AP10865	AP10645	AP10732	AP10872
M.C. Hunter	AP6548A	AP10735	AP10938	AP10646	AP10870	AP10864
SY-L Hunter	OS1901A		OS1902A			
	AP10640	AP10859	AP10861			
Resolver	AP10858	AP10860 OS3423A	AP10966		AP10874	
Receiver				AP6549		AP6549A
Motor and Generator	AP10642 AP10940	AP10643	AP10862 AP10957	AP10743	AP10877	OS3255A

MANY OTHER TYPES AVAILABLE. YOUR ENQUIRIES ARE WELCOMED SERVO SYSTEMS AND COMPONENT BROCHURE SENT ON REQUEST.

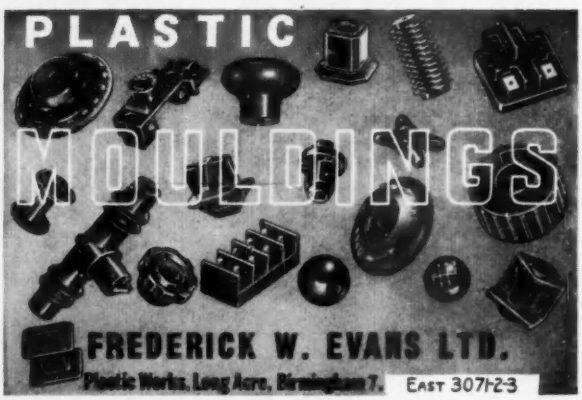

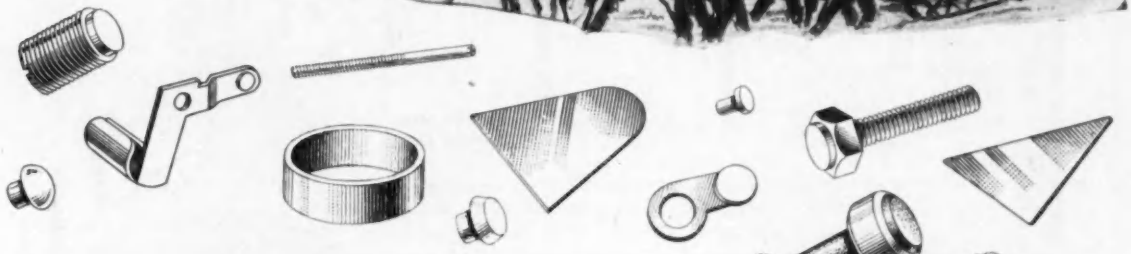

...maintaining contact

under difficult conditions is often a strange blending of the old and new. In this Geophysical Year the dog sleigh and the modern two-way radio play an equally important part. As specialists in the working of precious metals we also play our part in 'maintaining contact' and the "Thessco" and "Thessconite" range of contact materials are widely used throughout the electrical industries of many countries.

The latest catalogue giving our full range of sintered and wrought metal contacts is yours for the asking — or one of our technical representatives will be pleased to call for a full discussion.

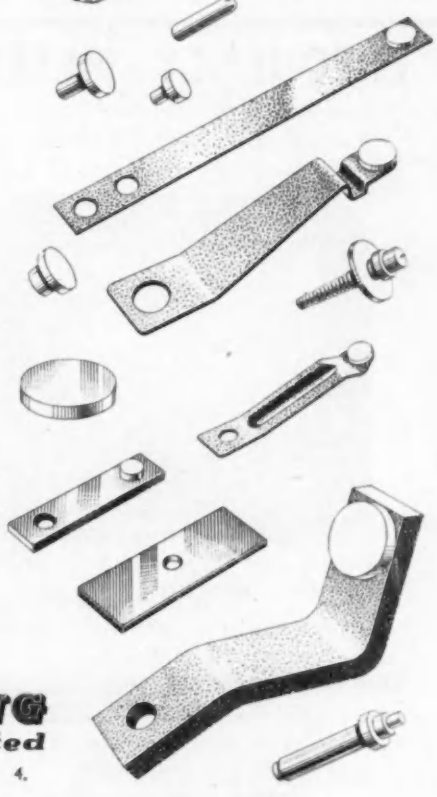

The SHEFFIELD SMELTING Company Limited

HEAD OFFICE AND WORKS: ROYDS MILL STREET, SHEFFIELD, 4.
also in LONDON and BIRMINGHAM.

RADIO TELEPHONE AERIAL SYSTEMS LTD.

(IN ASSOCIATION WITH J-BEAM AERIALS LTD. AND SKY-MASTS)

REDAN STREET, LONDON, W.14

SHEpherds Bush 6426 RIVerside 7878

SKY-BEAM

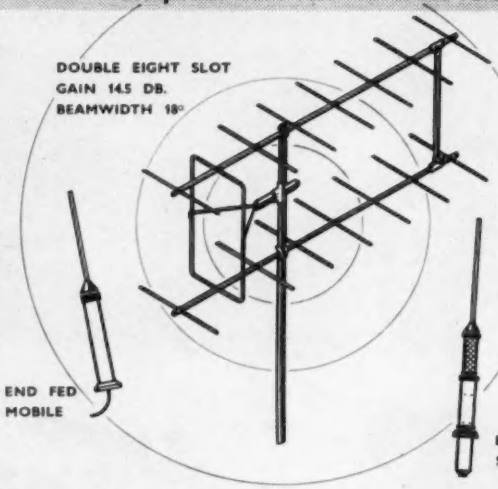

460-480 Mc/s BAND AERIALS. COMPLETE RANGE NOW AVAILABLE FOR POINT TO POINT LINKS AND FIXED TO MOBILE WORKING

We are VHF aerial specialists and can advise you on aerial systems, technical performance and practical installations, and can carry the work through to its final stages.

FREQUENCY METERS

SIZES : 2½" to 8"

UP TO 5000 CYCLES

PROMPT DELIVERY

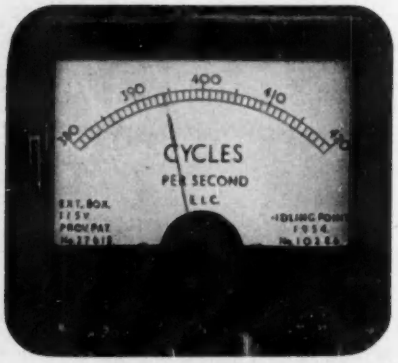

also the new SYNCHROSCOPE and Phase SEQUENCE METER both up to 5Kc.

and full range of Switchboard instruments

Ask for illustrated Catalogue

THE ELECTRICAL INSTRUMENT CO. (Hillington) LTD.

HILLINGTON GLASGOW

London stockists, H. A. Patterson & Ptnrs., Ltd.,
Oxford House, 23 West Wycombe Rd., High Wycombe.
Telephone : High Wycombe 2769

If you need

a small **METAL PRESSING**
for your product, why not consult us ?

• • •

We specialise in light precision presswork in all metals for the Electrical Trades

QUOTATIONS BY RETURN

BIRMINGHAM SPECIALITIES LTD.

80-81 BATH STREET, BIRMINGHAM 4

Phone : CENTRAL 2492

INSULATED INSPECTION MIRROR



A one-piece steel handle securely soldered to a shell carries a 24 mm. diameter glass dental type mirror.
All the exterior is coated with a thick continuous layer of synthetic insulating compound. The mirror can be used with convenience and safety for the inspection of switch gear, relays, etc.
No. 1195 either plane or magnifying mirror. List No. 168 illustrated and describes this and other dental types of inspection mirrors.

MANUFACTURED BY:—

GOWLLANDS LTD., MORLAND ROAD, CROYDON, SURREY

Obtainable from Small Tool or Scientific Instrument Dealers

Europe's most comprehensive range of

VIBRATION EQUIPMENT



GOODMANS INDUSTRIES LIMITED draw attention to Europe's most comprehensive range of VIBRATION EQUIPMENT—providing peak thrusts up to 10,000 lbs. and frequency ranges extending to 10,000 c/s. Matched OSCILLATOR—AMPLIFIER—VIBRATION GENERATOR combinations are available for the greater part of the range covered. GOODMANS Vibrators may be used in servo and industrial control applications.

For further information or advice, please write to our Technical Advice Bureau.





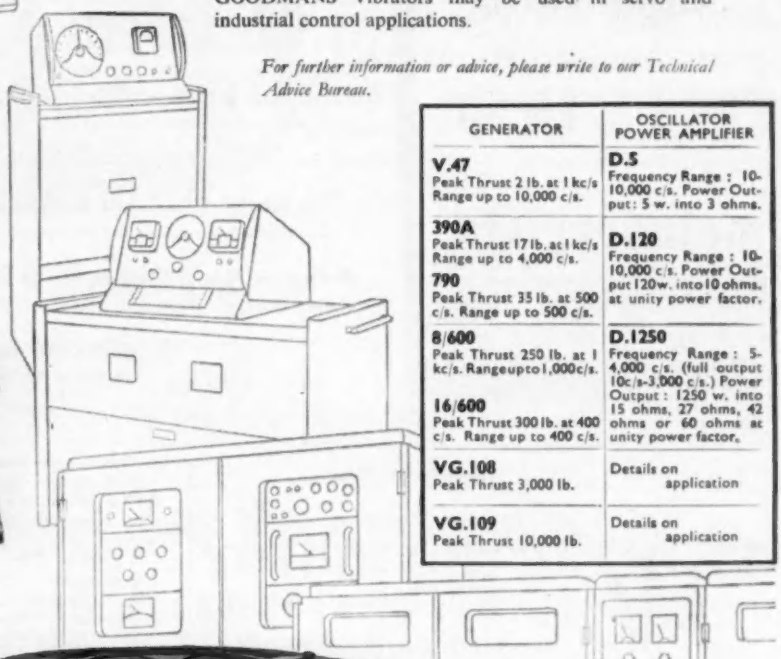

GENERATOR	OSCILLATOR POWER AMPLIFIER
V.47 Peak Thrust 2 lb. at 1 kc/s Range up to 10,000 c/s.	**D.5** Frequency Range : 10-10,000 c/s. Power Output: 5 w. into 3 ohms.
390A Peak Thrust 17 lb. at 1 kc/s Range up to 4,000 c/s. **790** Peak Thrust 35 lb. at 500 c/s. Range up to 500 c/s.	**D.120** Frequency Range : 10-10,000 c/s. Power Output 120 w. into 10 ohms, at unity power factor.
8/600 Peak Thrust 250 lb. at 1 kc/s. Range up to 1,000 c/s. **16/600** Peak Thrust 300 lb. at 400 c/s. Range up to 400 c/s.	**D.1250** Frequency Range : 5-4,000 c/s. (full output 10c/s-3,000 c/s.) Power Output : 1250 w. into 15 ohms, 27 ohms, 42 ohms or 60 ohms at unity power factor.
VG.108 Peak Thrust 3,000 lb.	Details on application
VG.109 Peak Thrust 10,000 lb.	Details on application

ENQUIRY FORM

TO GOODMANS INDUSTRIES, LIMITED
AXIOM WORKS · LANCELOT RD. · WEMBLEY, MIDDX. ENGLAND

We are interested in the following:—

- ☐ General Catalogue
- ☐ Equipment to vibrate load of ..... lb at ..... g (..... in) ..... c/s to ..... c/s
- ☐ Suitable driving equipment
- ☐ Other items .....
- ☐ A vibration system for the duty of .....

Name .....
Company .....
Address .....

Please mark details required. E21

GOODMANS *Vibration Generators*

GOODMANS INDUSTRIES, LIMITED | AXIOM WORKS · WEMBLEY MIDDX · ENGLAND
Telephone: WEMbley 1200 (8 lines)

GD. 21

RADIO TELEPHONE AERIAL SYSTEMS LTD.

(IN ASSOCIATION WITH J-BEAM AERIALS LTD. AND SKY-MASTS)

REDAN STREET, LONDON, W.14

SHEpherds Bush 6426 RIVerside 7878

SKY-BEAM

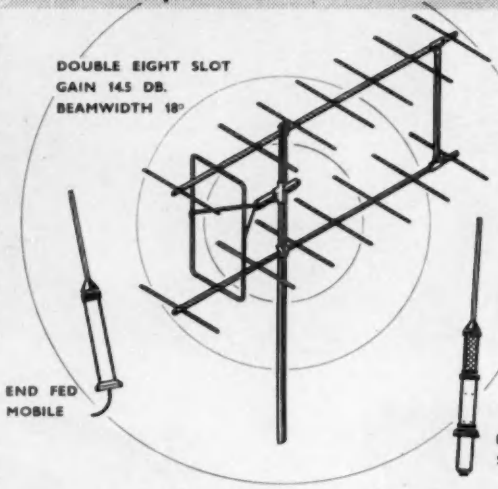

460-480 Mc/s BAND AERIALS. COMPLETE RANGE NOW AVAILABLE FOR POINT TO POINT LINKS AND FIXED TO MOBILE WORKING

We are VHF aerial specialists and can advise you on aerial systems, technical performance and practical installations, and can carry the work through to its final stages.

FREQUENCY METERS

SIZES : 2½" to 8"

UP TO 5000 CYCLES

PROMPT DELIVERY

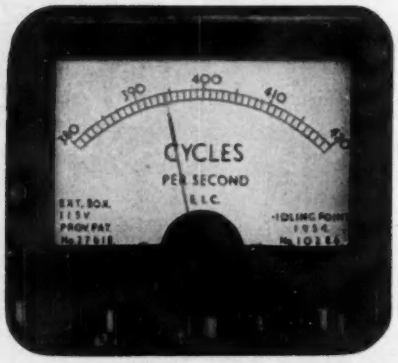

also the new SYNCHROSCOPE and Phase SEQUENCE METER both up to 5Kc.

and full range of Switchboard instruments

Ask for illustrated Catalogue

THE ELECTRICAL INSTRUMENT CO. (Hillington) LTD.

HILLINGTON GLASGOW

London stockists, H. A. Patterson & Ptnrs., Ltd., Oxford House, 23 West Wycombe Rd., High Wycombe. Telephone : High Wycombe 2769

If you need

a small **METAL PRESSING** for your product, why not consult us ?

• • •

We specialise in light precision presswork in all metals for the Electrical Trades

QUOTATIONS BY RETURN

BIRMINGHAM SPECIALITIES LTD.

80-81 BATH STREET, BIRMINGHAM 4

Phone : CENTRAL 2492

INSULATED INSPECTION MIRROR



A one-piece steel handle securely soldered to a shell carries a 24 mm. diameter glass dental type mirror.

All the exterior is coated with a thick continuous layer of synthetic insulating compound. The mirror can be used with convenience and safety for the inspection of switch gear, relays, etc.

No. 1195 either plane or magnifying mirror. List No. 168 illustrated and describes this and other dental types of inspection mirrors.

MANUFACTURED BY:—

GOWLLANDS LTD., MORLAND ROAD, CROYDON, SURREY

Obtainable from Small Tool or Scientific Instrument Dealers

Europe's most comprehensive range of

VIBRATION EQUIPMENT



GOODMANS INDUSTRIES LIMITED draw attention to Europe's most comprehensive range of VIBRATION EQUIPMENT—providing peak thrusts up to 10,000 lbs. and frequency ranges extending to 10,000 c/s. Matched OSCILLATOR—AMPLIFIER—VIBRATION GENERATOR combinations are available for the greater part of the range covered. GOODMANS Vibrators may be used in servo and industrial control applications.

For further information or advice, please write to our Technical Advice Bureau.





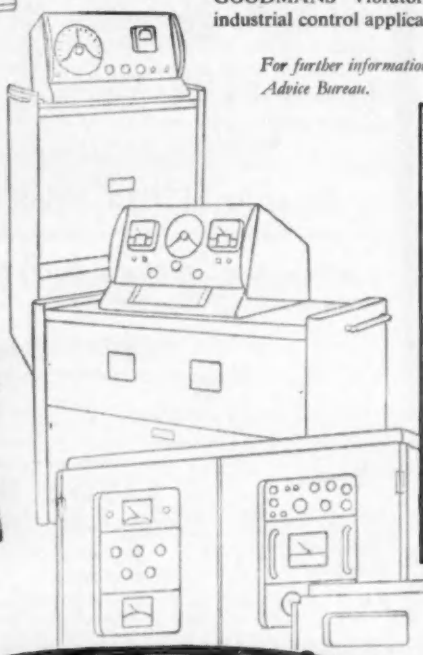

GENERATOR	OSCILLATOR POWER AMPLIFIER
V.47 Peak Thrust 2 lb. at 1 kc/s Range up to 10,000 c/s.	**D.5** Frequency Range : 10-10,000 c/s. Power Output: 5 w. into 3 ohms.
390A Peak Thrust 17 lb. at 1 kc/s Range up to 4,000 c/s.	**D.120** Frequency Range : 10-10,000 c/s. Power Output 120w. into 10 ohms, at unity power factor.
790 Peak Thrust 35 lb. at 500 c/s. Range up to 500 c/s.	
8/600 Peak Thrust 250 lb. at 1 kc/s. Range up to 1,000c/s.	**D.1250** Frequency Range : 5-4,000 c/s. (full output 10c/s-3,000 c/s.) Power Output : 1250 w. into 15 ohms, 27 ohms, 42 ohms or 60 ohms at unity power factor.
16/600 Peak Thrust 300 lb. at 400 c/s. Range up to 400 c/s.	
VG.108 Peak Thrust 3,000 lb.	Details on application
VG.109 Peak Thrust 10,000 lb.	Details on application

ENQUIRY FORM

TO GOODMANS INDUSTRIES, LIMITED, AXIOM WORKS · LANCELOT RD. · WEMBLEY, MIDDX. ENGLAND

We are interested in the following:—

- ☐ General Catalogue
- ☐ Equipment to vibrate load of ..... lb at ..... g (..... in) ..... c/s to ..... c/s
- ☐ Suitable driving equipment
- ☐ Other items .....
- ☐ A vibration system for the duty of .....

Name .....

Company .....

Address .....

Please mark details required. E21

GOODMANS *Vibration Generators*

GOODMANS INDUSTRIES, LIMITED | AXIOM WORKS · WEMBLEY MIDDX · ENGLAND
Telephone: WEMbley 1200 (8 lines)

GD. 21

News of great importance to all metallurgists

A WIDE VARIETY of metallic borides is now available in this country. With melting points up to 3,100°C, micro-hardness as much as 3,400 Kg./sq. mm., and electrical resistance down to below 10 micro ohm/cm., these compounds open up interesting possibilities. Their resistance to corrosion both by noxious gases and by liquid or gaseous metals and their superior properties at elevated temperatures indicate their value for locations where inert character and resistance to deformation under extreme conditions are of importance.

Borax Consolidated Limited can offer several borides of the more important metals such as Chromium, Molybdenum and Tungsten either in one or both of the chemically pure and technical grades, as well as the borides of some of the less common metals, such as Titanium, Zirconium, Vanadium, Niobium and Tantalum. The chemically pure series has a minimum average purity of 99.8% and a particle size of 10-50μ. The technical grade has a minimum purity of the order of 99% with particle size averaging 5-10μ.

Please write for technical data sheets, which give the chemical analysis and main physical characteristics of each compound.

See us for METALLIC BORIDES and ELEMENTAL BORON

BORAX CONSOLIDATED LIMITED

BORAX HOUSE · CARLISLE PLACE · LONDON SW1 · Telephone: VICtoria 9070

20 MULE TEAM *Registered Trademark*

TGA 8X1D

THIS is the motor

FOR SEQUENCE SWITCHING, CHART RECORDERS, PROCESS CONTROLLERS, INSTRUMENTATION, AUTO-LUBRICATION, etc.



★ SELF STARTING
★ CONSTANT SPEED
★ YEARS OF RELIABLE SERVICE
★ WIDE VARIETY OF SPEEDS
★ COMPETITIVE PRICE

Sintered bronze rotor bearings ensure long life. Power consumed 2 watts. Write or telephone now for full details of this compact, totally enclosed LIGHT DUTY Motor Unit.

SMITHS

CONSTANT SPEED MOTORS

SMITHS CLOCK & WATCH DIVISION

CONTRACTS BRANCH, 179 GREAT PORTLAND STREET, LONDON, W.1

Telephone: LANgham 5811

JASON VALVE RETAINERS

FOR CONVENTIONAL CHASSIS AND PRINTED CIRCUITS

★ *Plated Steel*
★ *3 sizes*

Fix into the hollow rivet holes of chassis-mounted valve holders of any thickness, or into two ⅛" holes on printed circuits. Special lengths are supplied for the latter. In 3 sizes: ECF. 80, EF. 80 and EL. 84. For immediate delivery.

10/- Per sample 100

£3-10-0 per 1,000

★ Quantity enquiries to

THE JASON MOTOR AND ELECTRONIC CO.,

3-4 GT. CHAPEL ST., OXFORD ST., LONDON, W.1. Phone GER 0273/4

INSULATION

Our products include—
Presspahn and Leatheroid; Pressboard; Vulcanized Fibre; Cable and Red Rope Paper; Bakelite and Ebonite; Varnished Paper and Tapes; Varnished Silks and Tapes; Varnished Glass and Tapes; Varnished Cambric, Silk, Glass and P.V.C. Sleevings; Cotton Tapes, Webbings and Sleeving; Chatterton Compound; Adhesive and Rubber Tapes; Acetate Coated Insulation.

PRESSPAHN, LTD.

BRADFORD, YORKS, ENGLAND

Established 1900

REGISTERED ELECTRICAL WELLSTEAD INSULATION TRADE MARK

Telephone: Bradford 25135 (Pvt. Br. Ex.)
Telegrams & Cables: "Presspahn, Bradford"

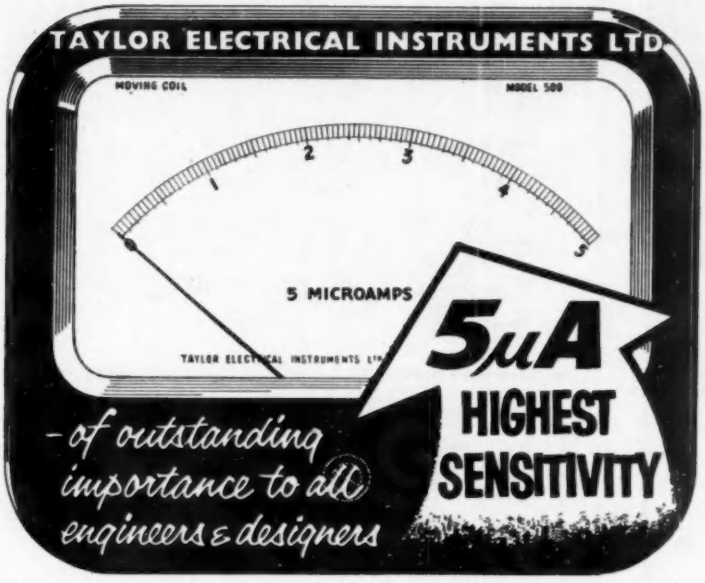

A revolutionary new idea,

TAYLOR'S 'CENTRE POLE'

moving coil movement sets the standard for panel meters. It is the **MOST SENSITIVE AND MOST POWERFUL MOVEMENT ON THE MARKET** measuring 5 millionths of an amp with complete reliability, and accuracy to B.S. 89/54 Industrial limits. Extremely robust, this instrument consists of a centre core magnet surrounded by a soft iron ring where the coil rotates around the magnet. **TORQUE TO WEIGHT RATIO IS AT LEAST TWICE THAT OF CONVENTIONAL MOVEMENTS. STICK-FREE OPERATION, INHERENT MAGNETIC SHIELDING.** A novel method of dry balancing ensures permanency and reliability.

Patented anti-parallex mirror scale gives accurate reading. The meters can withstand 10,000 per cent overload.

A wide range of meters, round or rectangular, is available with scale lengths from two to five inches

VERY COMPETITIVE PRICES · PROMPT DELIVERY

Samples delivered in seven days

Write for a catalogue stating your requirements

Quantities in 4 weeks

Taylor

TAYLOR ELECTRICAL INSTRUMENTS LTD., DEPT. EL., Montrose Avenue, Slough, Bucks. **Tel : Slough 21381**

The quick fastener of sure reliability

DZUS FASTENERS

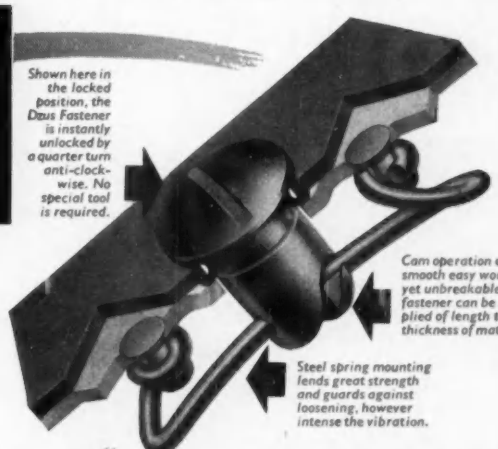

Shown here in the locked position, the Dzus Fastener is instantly unlocked by a quarter turn anti-clockwise. No special tool is required.

Cam operation ensures smooth easy working yet unbreakable grip; fastener can be supplied of length to suit thickness of material.

Steel spring mounting lends great strength and guards against loosening, however intense the vibration.

This is the fastener so widely used for fast assembly operations in the precision mass-production of today. It is indispensable for fastening hinged or removable parts which have to be cleaned, adjusted or inspected. DZUS Fasteners are easily applied to solid or laminated materials of any gauge. They have tremendous holding power but only an easy quarter turn clockwise is necessary to lock them fast, or unlock them.

Write for full details of application to your particular industry to:

DZUS FASTENER EUROPE LIMITED

Farnham Factory Estate · Guildford Road · Farnham · Surrey

Sales Agents in U.K.: THOMAS P. HEADLAND LTD.

Melon Road · Peckham · London · S.E.15

Excellence in design...

Specialists in Subminiature Telecommunication Components

AIR DIELECTRIC TRIMMER
70pF



Illustration (approx.) actual size

12 Vane type, 500 V. nsulation 10,000 megs.
Width 16·5mm. Power Factor less than ·001.
Length 22mm. Temp. Coeff.: 50 parts per
Height 19mm. million per. °C.

OXLEY
DEVELOPMENTS CO. LTD.
ULVERSTON NORTH LANCS *Tel: Ulverston 3306*

Increased production results in *LOWER RELAY PRICES!*

We are manufacturers of Post Office Type 3000 relays with contacts and windings to customers' requirements.
Impregnation, tropicalisation and high voltage insulation available.
Our Sales Engineers will be pleased to call and discuss your requirements.
FAST DELIVERY

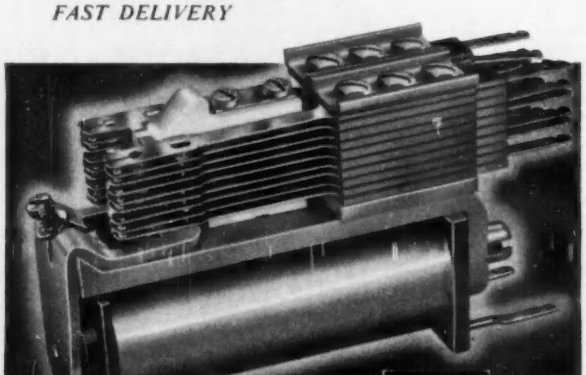

STEVENAGE RELAYS LIMITED
An Associate Company of W. H. Sanders (Electronics) Limited.
GUNNELS WOOD ROAD · STEVENAGE · HERTS
Telephone: Stevenage 981

BRITISH SPRINGS & WASHERS

WILLIAM FINUCANE (Springs and Pressings) LTD.
A.I.D. A.R.B.
ELGAR 3757/8/9
16A HILLSIDE, STONEBRIDGE PARK
LONDON, N.W.10

NORRIS EQUIPMENT and CONSTRUCTION LTD.

Will design and manufacture ELECTRONIC EQUIPMENT to client's specific requirements.

•

58, QUEENS ROAD, BRISTOL 8
Telephone: Bristol 36817

DESIGNED

FOR USE IN ELECTRONIC CONTROLLING CIRCUITS

The unit is double-wound, vacuum dried and impregnated, and sealed with bakelite varnish after impregnation. The terminals, neatly disposed on the bakelite panel, are double-locked to allow for any shrinkage in the thickness of the panel. All bakelite parts are sealed after machining. Clamped by heavy gauge steel pressings to minimise hum.

INPUT: 0—400—420—440 volts.
SECONDARY 1. OUTPUT: 500—450—350—0—350—450—500. 100mA.
,, 2. 6.3 volts at 2 amps.
,, 3. 6.3 volts at 1 amp.
,, 4. 5 volts at 3 amps.

BUILT FOR HARD USE

AUSTIN WALTERS & SON, LTD.
AYRES ROAD, MANCHESTER, 16. Tel: TRAfford Park 1827.
CW 3237

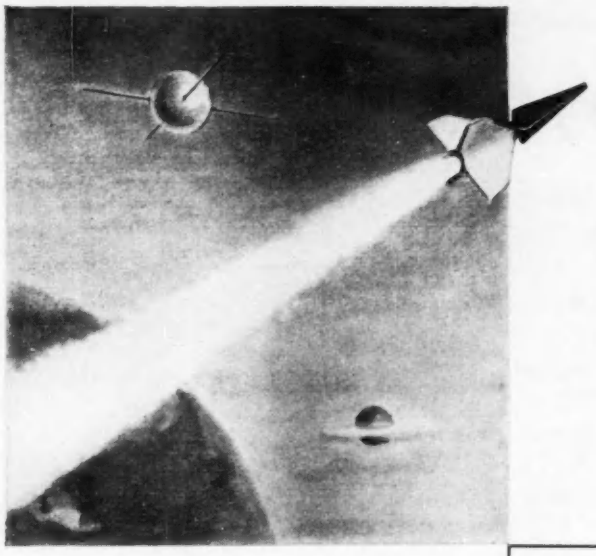

SUPERSONICS
and
SILVER-ZINCS

Power for telemetering information from rockets and guided test weapons is supplied by lightweight storage batteries. Venner silver-zinc accumulators are used in guided weapons and test vehicles because of their small measurements, light weight, high power to weight ratio and constancy of voltage.

For full particulars write to Dept. E.E.



Standard egg shows comparative size of G.W. Accumulator. Egg weighs 2 ozs. G.W. Accumulator type SZ/6 weighs 2¼ ozs.

VENNER

A member of the Venner Group of Companies

ACCUMULATORS LIMITED

KINGSTON BY-PASS · NEW MALDEN · SURREY · *Tel:* MALden 2442

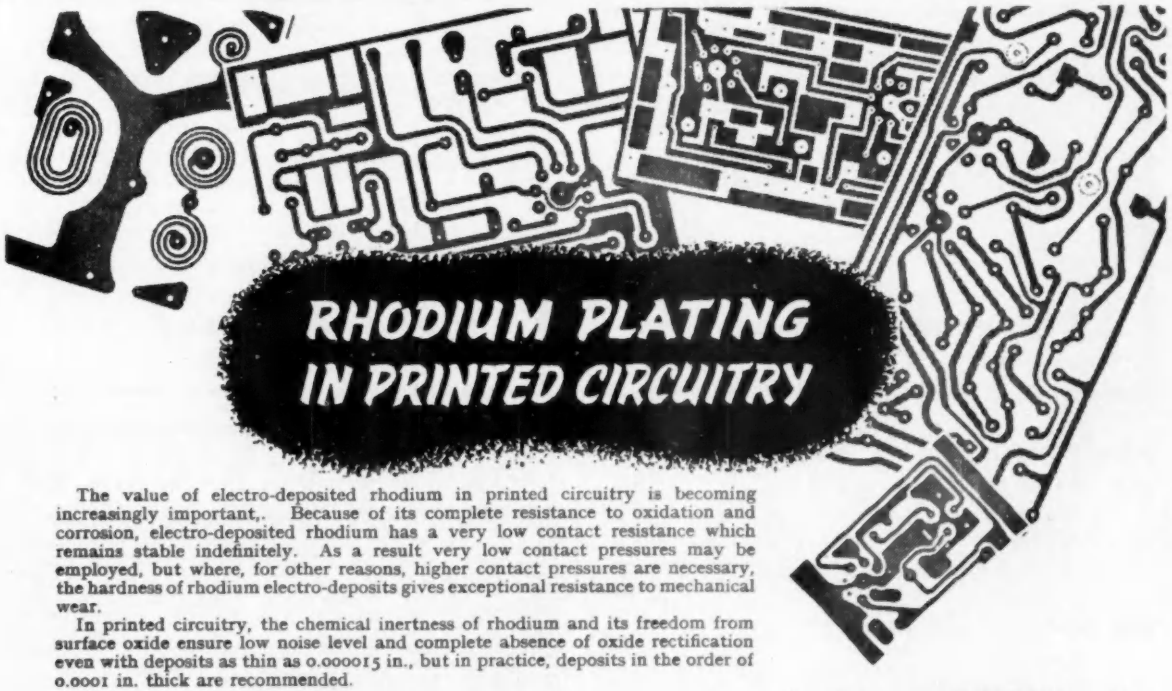

RHODIUM PLATING IN PRINTED CIRCUITRY

The value of electro-deposited rhodium in printed circuitry is becoming increasingly important,. Because of its complete resistance to oxidation and corrosion, electro-deposited rhodium has a very low contact resistance which remains stable indefinitely. As a result very low contact pressures may be employed, but where, for other reasons, higher contact pressures are necessary, the hardness of rhodium electro-deposits gives exceptional resistance to mechanical wear.

In printed circuitry, the chemical inertness of rhodium and its freedom from surface oxide ensure low noise level and complete absence of oxide rectification even with deposits as thin as 0.000015 in., but in practice, deposits in the order of 0.0001 in. thick are recommended.

Illustrations by courtesy of Telegraph Condenser Co., Ltd.

**Our technical staff is at your service to assist with any problems regarding the electro-deposition of precious metals.*

ENGELHARD INDUSTRIES, LTD.

BAKER PLATINUM DIVISION

52 HIGH HOLBORN, LONDON, W.C.1 · *Chancery 8711*

Oyez! Oyez!! Oyez!!!

Let it be known by all and sundry that . . . .

★ **ELEVEN WAY CO-AXIAL SWITCHES Type RS 11**
having a frequency range of D.C. to 500 Mc/s and S.W.R. >1.5

★ **FIXED ATTENUATORS Types RF6T, 10T, and 20T**
having a frequency range of D.C. to 2000 Mc/s and S.W.R. >1.5

★ **VARIABLE ATTENUATORS Types RV and RW,**
6 or 11 step, frequency range D.C. to over 300 Mc/s.

★ **RADIO FREQUENCY BRIDGES Type LE.300,**
measuring L.C. and R over the frequency range 15 Kc/s to 15 Mc/s.

. . . have been carefully designed and manufactured according to the principles laid down by Dr. Ohm, Messrs. Faraday, Maxwell, Hatfield and Minns, and are now available at short notice.

★ *Send for details of these interesting items to :–*

Hatfield Instruments Limited

CRAWLEY ROAD · HORSHAM · SUSSEX · *Telephone: Horsham 3232/2*

TRANSISTOR POWER SUPPLIES

Any Voltage 6 to 20 volts at 3 or 10 amps
Stabilised against mains variation to 0.1%
Stabilised against load variation to 0.5%
Protected against overload, short circuit, and ambient overheating. Ripple 1 M.V.

Sample Orders:-
3A/6.....3 amps at 6 ± volts
10A/15.....10 amps at 15 ± volts

WENBROOK CONTROLS LTD.
Cheadle House · Cheadle · Cheshire

Trade Mark established 1895

SPECIALIST MANUFACTURERS OF HIGHEST GRADE
INSTRUMENT WIRES.

COPPER AND RESISTANCE WIRES.
"MANGINSAX" — GENUINE MANGANIN.
ENAMEL, SILK, RAYON COVERED.
P.V.C. POLYTHENE, P.V.C. MICROPHONE "INSUGLASS". THERMOCOUPLE, etc.

THE SAXONIA ELECTRICAL WIRE CO. LTD.
Contractors to the Admiralty War Office, Air Ministry
ROAN WORKS, GREENWICH S.E.10
Grams: "SAXONIST LONDON" Phones: GREenwich 3713/4 & 0463
"GREENWICH CABLES & FLEXIBLES"

The Favourites in the Trade!

➡ **AERIAL SOCKET TYPE CS3**
- Trouble-free long life
- Robust construction
- Moulded in one piece
- Thoroughly insulated



PRICE 4¾D

FIT TO ALL STANDARD TYPES

➡ **CO-AXIAL PLUG TYPE CP1**
- Easy assembly
- Strong structure
- Made for perfect connection by



PRICE 6D

➡ **PANORAMA RADIO CO.**
73, Wadham Road, Putney, S.W.15. *Telephone: VANdyke 5300*

ENGRAVING

MACHINE ENGRAVING our Specialty
PHOTO-ETCHED LABELS
DIALS AND SCALES
INSTRUCTION PLATES ETC.

Send your instructions to -
Tel NEW CROSS 3344/5
J.J. Robinson Ltd
JUSTICE WORKS · GERVASE STREET
OLD KENT ROAD · LONDON · SE15

ARDENTE make a wide range of

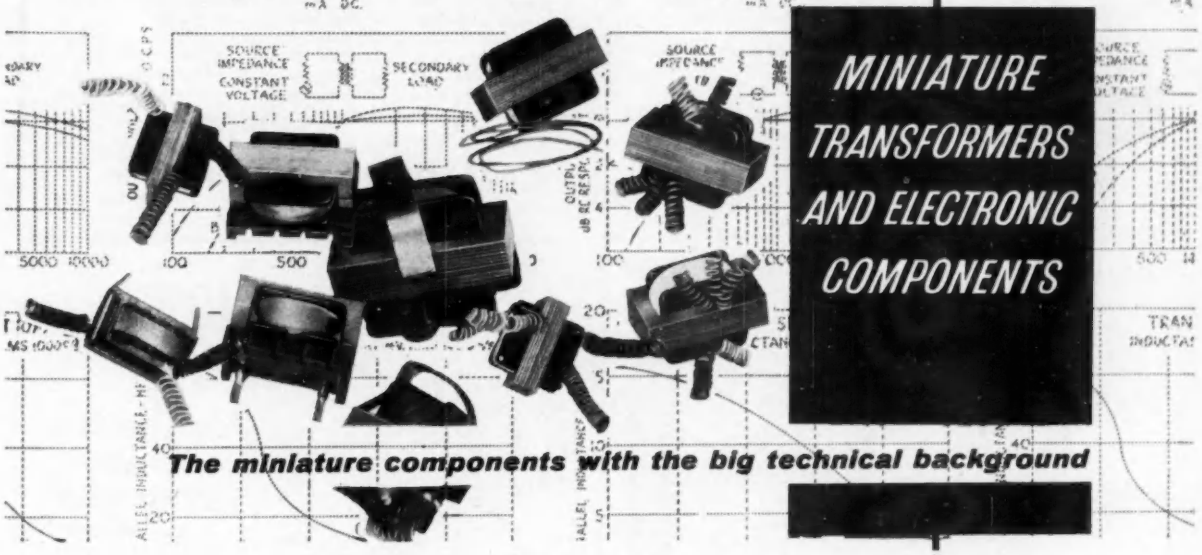

MINIATURE TRANSFORMERS AND ELECTRONIC COMPONENTS

The miniature components with the big technical background

Sole Manufacturers and Exporters:

ARDENTE ACOUSTIC LABORATORIES LTD.

8-12 MINERVA ROAD, NORTH ACTON, LONDON, NW10 *Telephone: ELGar 3923*

Suppliers of components and hearing aids to the Government and manufacturers all over the world

Fine wires always in demand for precision work

Lewcos Insulated Resistance Wires with standard coverings of cotton, silk, glass, asbestos, standard enamel and synthetic enamel are supplied over a large range of sizes

Send for our new leaflet

LEWCOS

Insulated Resistance Wires

THE LONDON ELECTRIC WIRE COMPANY AND SMITHS, LIMITED · LEYTON · LONDON · E.10

Insuloid

FLEXIGUARD

flexible cable trunking

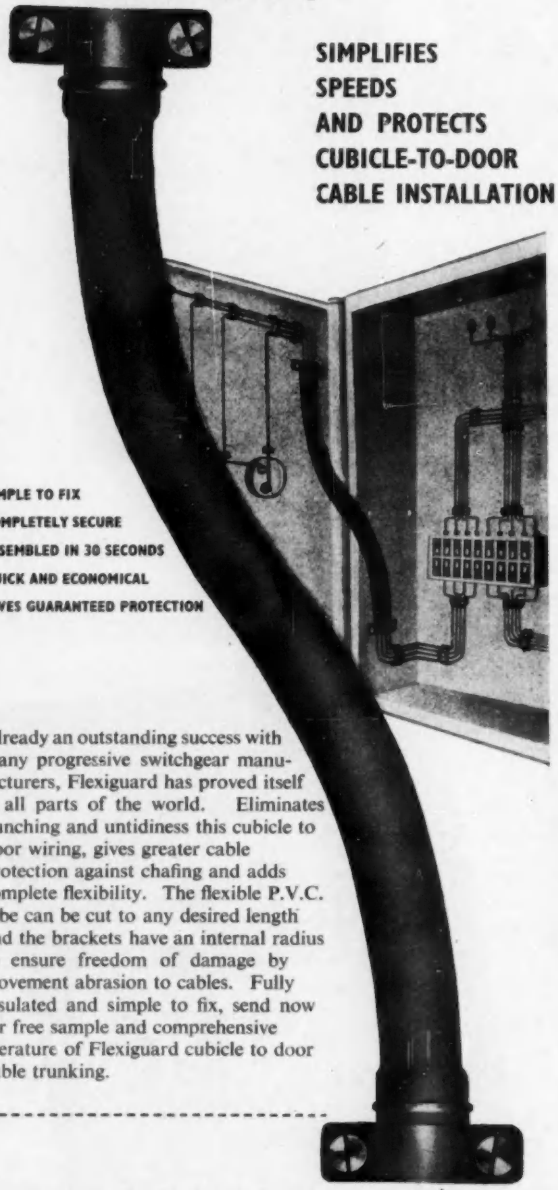

SIMPLIFIES
SPEEDS
AND PROTECTS
CUBICLE-TO-DOOR
CABLE INSTALLATION

SIMPLE TO FIX
COMPLETELY SECURE
ASSEMBLED IN 30 SECONDS
QUICK AND ECONOMICAL
GIVES GUARANTEED PROTECTION

Already an outstanding success with many progressive switchgear manufacturers, Flexiguard has proved itself in all parts of the world. Eliminates bunching and untidiness this cubicle to door wiring, gives greater cable protection against chafing and adds complete flexibility. The flexible P.V.C. tube can be cut to any desired length and the brackets have an internal radius to ensure freedom of damage by movement abrasion to cables. Fully insulated and simple to fix, send now for free sample and comprehensive literature of Flexiguard cubicle to door cable trunking.

Find out about these other Insuloid products

AS ADJUSTABLE SADDLES, SAS SINGLE SCREW ADJUSTABLE SADDLES

CRADLECLIP, PLASKLIP, BUS BAR INSULATION, TYPE NX, X & CY CLIPS

INSULOID MANUFACTURING CO. LTD.

Sharston Works, Leestone Road, Wythenshawe, Manchester

Tel: WYT 2842 & 3163 *Grams: INSULOID MANCHESTER*

OUR FIRST

This is our first advertisement in "Electronic Engineering", although we have been manufacturing quality quartz crystals for over 30 years.

The reason for the advertisement is that we want to tell you that we have just moved to a new factory that has been built and equipped with one object in view—the production of reliable and accurate quartz crystals.

We manufacture crystals in a very wide range of frequencies, mounted in all the approved types of crystal holder, and if you require a single crystal or a thousand, we think it will pay you to get in touch with us first.

We can offer prompt deliveries, and a technical advisory service on circuitry and other problems is always at your service.

If it's crystals, think of Q.C.C. first!

THE QUARTZ CRYSTAL Company Ltd.

Q.C.C. Works, Wellington Crescent, New Malden, Surrey

Telephones: MALden 0334 & 2988 Grams & Cables: Quartzco, New Malden

"SPINIATURE"

SUB-MINIATURE

PLUGS, SOCKETS, AND SOCKET STRIPS

SPEAR ENGINEERING CO. LTD.

WARLINGHAM • SURREY

Tel: Upper Warlingham 2774

Is this the Answer?

P.O. Type 3000

The most versatile relay available today.

Coils up to 120,000Ω

Spring Set Insulation up to 5KV

Polarised, High Speed and A.C. Relays. P.O. and Muirhead Key Switches, Uniselectors to specification, also type 600 Relays. Built to R.C.S. and R.C.L. 161 and 153 if required.

Are you aware of the variety of contact build-ups we can assemble? Your problem may not be as bad as it seems if you take advantage of our wide experience in the unlimited uses of this adaptable product.

- **Quotation by return**
- **Prototypes within 48 hours**
- **Good delivery gutaraneed**

Consult the Specialists!

Jack Davis (Relays) Ltd

(DEPT E) TUDOR PLACE, LONDON, W.1

TELEPHONES: MUSEUM 7960 LANGHAM 4821

A MUREX 'SINCOMAX' CO-AXIAL MAGNET *is used in this WEIR MOVING-COIL METER*

ACTUAL SIZE OF MAGNET

Photograph of the New Weir Moving Coil Meter by courtesy of The Weir Electrical Instrument Co. Ltd.

Murex 'Sincomax' Magnets permit this construction of a magnetic system which has the lowest possible leakage, and a high stable uniformity of flux distribution over 100° coil movement.
Write for Standard Magnets Booklet. Technical representatives are always available for consultation and advice.

MUREX LTD. *(Powder Metallurgy Division)*
RAINHAM · ESSEX · *Rainham, Essex 3322*
Telex 28632 Telegrams: Murex, Rainham-Dagenham Telex,
London Sales Office: CENTRAL HOUSE, UPPER WOBURN PLACE, W.C.1 *EUSton 8265*

Slotted Lines *for* VHF and UHF MEASUREMENT

Type LMD 3926

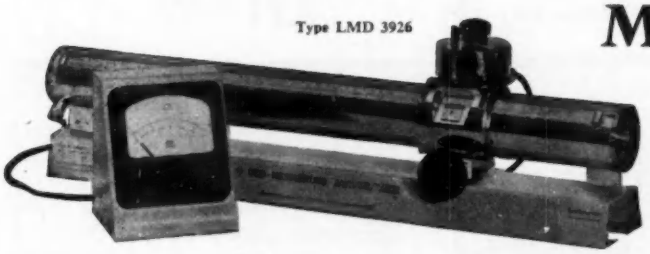

Robust and accurate: craftsman-built: laboratory-tested. These instruments are part of a complete range of the most modern and precise tools available to the radio engineer engaged in research and development between DC and Microwaves.

PRECISION COAXIAL LINES

50—60—75 OHMS IMPEDANCE
complete with indicators.
Type LMM 3916, 80—300 mc/s.
Type LMD 3926, 300—3000 mc/s.

NON-SLOTTED LINE FOR MICROWAVES

Type LMC 3931, 1700—8000 mc/s.
Direct reading on dial gauge.
Variable input and output coupling.
Indication on galvanometer.
Provision for external AF amplifier.
Can be used above 10,000 mc/s depending on mode of wave.

- BALUN TRANSFORMERS
- REFLECTOMETERS
- REACTANCE LINES
- UHF WATT METERS
- UHF MILLIVOLTMETERS
- UHF SIGNAL GENERATORS

AVELEY ELECTRIC LTD.
AYRON ROAD.
AVELEY INDUSTRIAL ESTATE
SOUTH OCKENDON
ESSEX

U.K. Concessionaires for Rohde & Schwarz, Munich

Telephone: South Ockendon 2021. **Telegrams:** AERSALE South Ockendon, Romford, Essex.

85/14

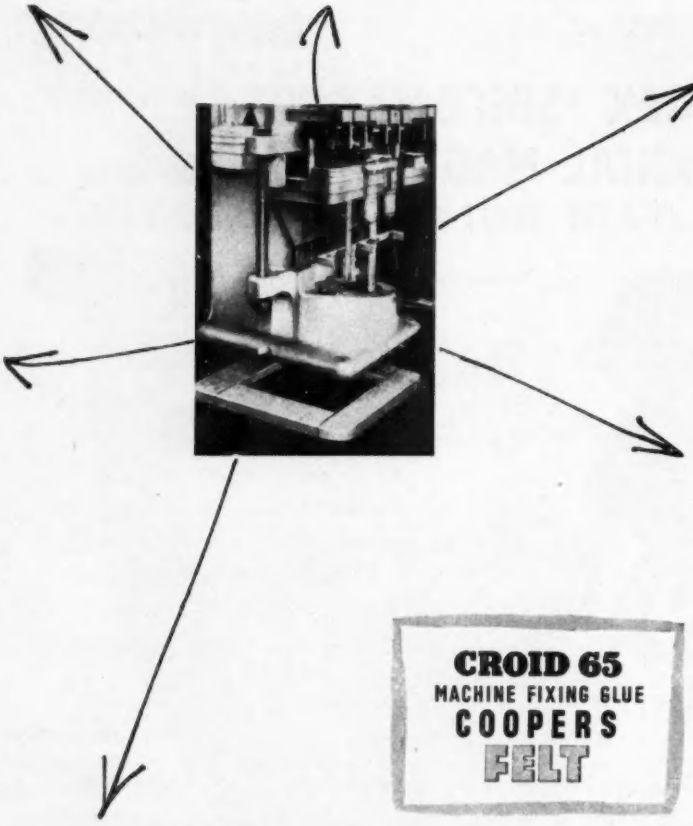

PUT IT THERE . . . .
OR THERE . . . .
OR THERE . . . .

Imagine your machines stuck down on a felt base which can absorb over 80% of vertical vibration, which has a holding power of 50 lb. to the square inch, which does away with bolts, grouting, damaged floors.

Then imagine deciding to change your layout when the workers have left one evening and having all the machines ready for action again in the morning. That's what Croid-Cooper can do for you.

Send for details to-day.

CROID 65
MACHINE FIXING GLUE
COOPERS
FELT

COOPER & CO. (B'HAM) LTD.
BRYNMAWR · BRECONSHIRE
TELEPHONE : BRYNMAWR 312

DEPENDABLE RELAY CO. LTD.

8A AINGER RD., CAMDEN TOWN, LONDON, N.W.3. PRimrose 8161
Head office, 12a Tottenham Street, W.1

P.O. TYPE 3,000 & 600 RELAYS

Typical
3000 TYPE RELAY

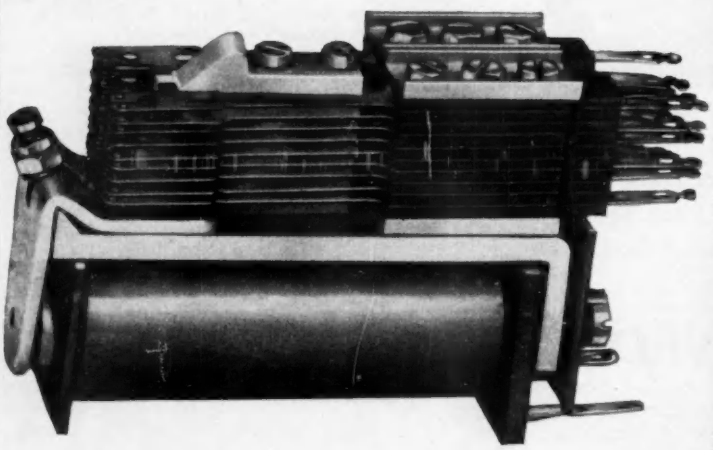

Manufactured to your specification to
A.I.D. & I.E.M.E. standards

★ **COILS** up to 80,000Ω.
★ **CONTACTS** up to 8 amp.
★ **INSULATION** up to 5kv.

PROMPT DELIVERY
PROMPT QUOTATIONS

★ **PROTOTYPES 7 DAYS.**
★ **SPECIALISTS in TROPICAILSATION.**
★ **TRANSISTORISED RELAYS.**

Technical data leaflet on request

Contractors to
LEADING MANUFACTURERS
P.O. & GOVERNMENT DEPTS.

——— when only the best will do.

INDEX TO ADVERTISERS

A

Adcola Products, Ltd. 126
Advance Components, Ltd. 139
Airmec, Ltd. 90, 97
All-Power Transformers, Ltd. 58
Alma Components, Ltd. 3
Amphenol (Gt. Britain), Ltd. 124
Amplivox, Ltd. 67
Andec, Ltd. 135
Anglo-American Vulcanized Fibre Co., Ltd. .. 115
Ardente Acoustic Laboratories, Ltd. 163
Armstrong Patents Co., Ltd. 130
Ashton, N. C., Ltd. 138
Automation, Ltd. 96
Aveley Electric, Ltd. 165
Avo, Ltd. 30

B

B. & K. Laboratories, Ltd. 15
Bakelite, Ltd. 34
Barlow-Whitney, Ltd. 132
Barr & Stroud, Ltd. 130
Belling & Lee, Ltd. 51
Berry's (Shortwave), Ltd. 138
Birch, H. A., & Co., Ltd. 149
Bird, Sydney S., & Sons, Ltd. 57
Birmingham Specialities, Ltd. 156
Boulton-Paul Aircraft, Ltd. 100
Borax Consolidated, Ltd. 158
Bradley, G. & E., Ltd. 66
Braybead (Ascot), Ltd. 24
British Electric Resistance Co., Ltd. 39
British Ferrograph Recorder Co., Ltd. 78
British Insulated Callender's Cables, Ltd. .. 93
British Springs & Washers 160
British Tabulating Machine Co., Ltd. 9
British Thomson-Houston Co., Ltd. 63
Brown, N. C., Ltd. 140
Broxlea Products, Ltd. 127
Burgess Products Co., Ltd. 74

C

Carr Fastener Co., Ltd. 89
Carter Gears, Ltd. 167
Chapman & Hall, Ltd. 353
Chelton (Electrostatics), Ltd. 150
Chemical & Petroleum Engineering Exhibition 126
Ching, Richard, & Son, Ltd. 135
Cinema-Television, Ltd. 22, 41
Cinetra Mfg. Co., Ltd. 152
Collett (S. H.) Manufacturing Co., Ltd. 151
Coivern, Ltd. 101, 102, 103, 104
Cooper & Co. (Birmingham), Ltd. 166
Cossor Instruments, Ltd. 7
Counting Instruments, Ltd. 32
Cressall Mfg. Co., Ltd. 68

D

Daly (Condensers), Ltd. 141
Dargue Brothers, Ltd. 128
Davis, Jack (Relays), Ltd. 164
Dependable Radio Supplies 128
Dependable Relay Co., Ltd. 166
Donovan Electrical Co., Ltd. 168
Dowding & Doll, Ltd. 71
Drayton Regulator & Instrument Co., Ltd. .. 146
Dzus Fastener (Europe), Ltd. 159

E

E.M.I. Electronics, Ltd. 47, 122
E.M.I. Sales & Service, Ltd. 75
Eddystone Radio (Stratton & Co., Ltd.) .. 59
Ekco Electronics, Ltd. 5
"Electrical Energy" 353
Electrical Instrument Co. (Hillington), Ltd. .. 156
Electro Methods, Ltd. 81, 125
Electronic Tubes, Ltd. 20
Elliott Bros. (London), Ltd. 8, 12
Engel & Gibbs, Ltd. 153
Engelhard Industries, Ltd. 161
Engis, Ltd. 42
English Electric Co., Ltd. 10, 69
English Electric Valve Co., Ltd. 83
Ericsson Telephones, Ltd. 44
Evans, Fredk. W., Ltd. 154

F

Farnell Instruments, Ltd. 52, 53
Ferranti, Ltd. 6, 8, 12, 14, 19
Ferraris, Fred (Clerkenwell), Ltd. 144
Fischer Bearings Co., Ltd. 142
Flann Microwave Instruments, Ltd. 142

G

G.S.V. (Marine & Commercial), Ltd. .. 80
Gardner, Henry, Ltd. 147
Gardners Radio, Ltd. 143
Goodmans Industries, Ltd. 157
Gowllands, Ltd. 156
Great Bridge Foundry Co., Ltd. 135
Guest, Keen & Nettlefolds (Midlands), Ltd. .. 64

H

Hassett & Harper, Ltd. 70
Hatfield Instruments, Ltd. 162
Henley's, W.T., Telegraph Works Co., Ltd. .. 154
Henry & Thomas, Ltd. 146
Hewlett-Packard Co. 119
Hilton Electric Co., Ltd. 154
Hinchley Engineering, Ltd. 108
Hirst Electronic, Ltd. 148
Honeywell-Brown, Ltd. 28
Hunt, A. H. (Capacitors), Ltd. .. Cover iii

I

Ilford, Ltd. 118
Imhof, Alfred, Ltd. 111
Imperial Chemical Industries, Ltd. 38
Instrument Screw Co., Ltd. 35
Insuloid Mfg. Co., Ltd. 164

J

Jackson Brothers (London), Ltd. 140
Jason Motor & Electronic Co. 158
Johnson Matthey & Co., Ltd. 79

K

Ketay, Ltd. 106
Keyswitch Co. 134

L

Lancashire Dynamo Electronic Products, Ltd. 11
L.C.C. 14
Lewis Spring Co., Ltd. 3
Light, H. A. (Productions), Ltd. 128

(Continued on next page)

Infinitely Variable Speed . . .

. . . accurately controlled

Fractional up to 35 HP Drives

. . . by either Hand, Remote Electrical, Lever or Hydraulic Relay controls which may be adjusted with the Gear running or stationary

Carter Hydraulic Variable Speed Gears are made in ten sizes for drives from 0.25 up to 35 horsepower.

Positive displacement action ensures a high degree of 'controlability', a feature of prime importance for many continuous process drives.

Write for Folder 458

Specialists for over 20 years in the design and manufacture of Hydraulic Variable Speed Gears.

Remote Electrical control push button operated from any number of convenient points is shown fitted to a Size F10 Carter Gear. Limit switches are fitted so that maximum and minimum output speeds may be pre-set and special circuits can be arranged to give a wide range of operating times.

Carter Gears Limited

BRADFORD 3
YORKSHIRE
ENGLAND

'phone: Bradford 64378 (3 lines)
'grams: 'Became' Bradford Telex.

INDEX TO ADVERTISERS *(continued from previous page)*

Linread, Ltd. 72
Lion Electronic Developments, Ltd. 123
Lodge Plugs, Ltd. 130
Londex, Ltd. 144
London Electric Wire Co. & Smiths, Ltd. .. 163
Lyons, Claude, Ltd. 27

M

M.O. Valve Co., Ltd. 77
Marconi Instruments, Ltd. 43
Marconi's Wireless Telegraph Co., Ltd. .. 131
Metropolitan-Vickers Electrical Co., Ltd. .. 76
Microwave Instruments, Ltd. 132
Miday Plastics, Ltd. 136
Middleton Tool & Engineering Co., Ltd. .. 14
Minnesota Mining & Mfg. Co., Ltd. 56
Modern Acoustics, Ltd. 46
Mond Nickel Co., Ltd. 50
Mullard, Ltd. 8, 54, 55, 65, 87, 92
Multimusic, Ltd. .. .. Cover iv
Murex, Ltd. 165

N

Nagard, Ltd. 29
New Electronic Products, Ltd. 151
Newton, H. T., & Co. 146
Norris Equipment & Construction, Ltd. .. 160
Nu-Swift, Ltd. 105

O

Oxley Developments Co., Ltd. 160

P

P.A.M., Ltd. 88
Painton & Co., Ltd. 18
Panorama Radio Co. 162
Parmeko, Ltd. 60
Phillips & Bonson, Ltd. 26
Phillips Control (Gt. Britain), Ltd. 150
Pitman, Sir Isaac, & Sons, Ltd. 132
Plasticable, Ltd. 150
Plessey Co., Ltd. Front Cover, 33, 117, 129
Power Jacks, Ltd. 148
Powis, David, & Sons, Ltd. 152
Presspahn, Ltd. 158
Pullin, R. B., & Co., Ltd. 86
Pye, W. G., & Co., Ltd. 82

Q

Quartz Crystal Co., Ltd. 164

R

Racal Engineering, Ltd. 121
Radio & Allied Industries, Ltd. 8
Radio Resistor Co., Ltd. 46
Radio Servicing Co. 138
Radio Telephone Aerial Systems, Ltd. .. 156
Radiometer 140
Radiospares, Ltd. 40
Ratcliffe, F. S. (Rochdale), Ltd. 107
Rejafix, Ltd. 153
Rivlin Instruments, Ltd. 21
Roband Electronics, Ltd. 95
Robinson, J. J., Ltd. 162
Roe, A. V., & Co., Ltd. 10, 12
Rollet, H., & Co., Ltd. 152
Royce Electric Furnaces, Ltd. 61
Russell, J., Electronics, Ltd. 45

S

Salford Electrical Instruments, Ltd. 109
Salon Internationale de la Piece Detachee Electronique 149
Saxonia Electrical Wire Co., Ltd. 162
Scientific & Projections, Ltd. 142
Servo & Electronic Sales, Ltd. 154
Servomex Controls, Ltd. 112
Sheffield Smelting Co., Ltd. 155
Siemens Edison Swan, Ltd. Cover ii, 16, 73, 94
Sierex, Ltd. 17
Sifam Electrical Instruments Co., Ltd. .. 152
Smiths Aircraft Instruments, Ltd. 10
Smiths Clocks & Watches, Ltd. 158
Solartron Electronic Group, Ltd. .. 13, 84, 85
Soundrite, Ltd. 25
Southern Instruments, Ltd. 145
Spear Engineering Co., Ltd. 164
Sperry Gyroscope Co., Ltd. 12
Standard Telephones & Cables, Ltd. 23, 62, 98, 99
Stevenage Relays, Ltd. 160
Sunvic Controls, Ltd. 144
Sylvania-Thorn Colour Television Laboratories, Ltd. 120

T

Taylor Electrical Instruments, Ltd. 159
Taylor Tunnicliff & Co., Ltd. 49
Telcon-Magnetic Cores, Ltd. 150
Telegraph Construction & Maintenance Co., Ltd. 31
Teleonics (Communications), Ltd. 110
Telephone Mfg. Co., Ltd. 6, 133
Texas Instruments, Ltd. 113
Thermal Syndicate, Ltd. 134
Thomas (Richard) & Baldwins, Ltd. 36
Trianon Electric, Ltd. 138
Twentieth Century Electronics, Ltd. 116

U

Unbrako Socket Screw Co., Ltd. 37

V

Vactite Wire Co., Ltd. 148
Venner Accumulators, Ltd. 161
Venus Pencil Co., Ltd. 137

W

Walters, Austin, & Son, Ltd. 160
Wayne Kerr Laboratories, Ltd. 114
Weathershields, Ltd. 134
Webb's Radio 134
Webber, R. A., Ltd. 152
Wenbrook Control, Ltd. 162
Wilkinson, L. (Croydon), Ltd. 136
Winston Electronics, Ltd. 124
Woden Transformer Co., Ltd. 141
Woods of Colchester, Ltd. 137

Z

Zenith Electric Co., Ltd. 147

A SELECTION FROM



Miniature plunger, door interlock switch with N.O. contacts, 2-amps. 550-volts A.C. Size 2⅛" long × 1" dia. (Type C 32 L 310).

A LARGE RANGE OF



Flush-mounting T.P. isolating switch for building-in Machine Tools, etc. 30-amp. 550-volts (Type C 95).

CONTROL ACCESSORIES

Terminal blocks (Type J 96) with clamp type terminals, white marker strip. Generous clearances between phases and to earth.
Made in the following sizes: 15-amp. 550-volt. 3-, 4- and 6-way. 30-amp. 550-volt. 3- and 4-way.

Sales Engineers available in LONDON, BIRMINGHAM, MANCHESTER, GLASGOW, BELFAST, BOURNEMOUTH.



The New Small A.C. Power Relay

Available 2-, 4- or 8 poles (with one or two coil circuit change-over contacts), fine silver double-break main contacts rated at 10-amps. 550-volts Any pole can be N.O. or N.C.

Illustrated is a 4-pole enclosed relay

DONOVAN

THE DONOVAN ELECTRICAL CO. LTD.
74 Granville St., — Birmingham 1
LONDON DEPOT: 149-151 YORK WAY, N.7 GLASGOW DEPOT: 22 PITT ST., C.2

Printed in Great Britain by The Press at Coombelands, Ltd., Addlestone, Surrey, for the Proprietors, Morgan Brothers (Publishers), Ltd., 28, Essex Street Strand, W.C.2. Registered for Transmission by Canadian Magazine Post.

CAPACITORS

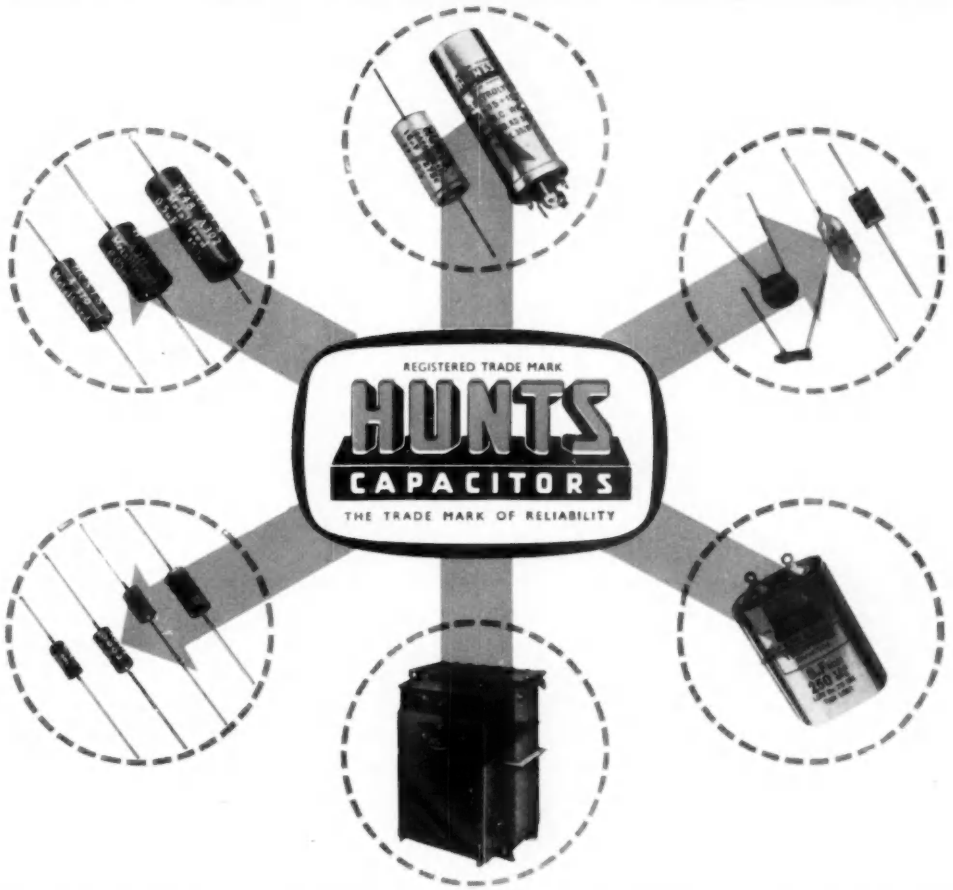

for all applications

TYPES

DRY ELECTROLYTIC
METALLISED PAPER (HUNTS PATENTS)
METALLISED PLASTIC FILM (HUNTS PATENTS)
PLASTIC FILM · FOIL & PAPER
SILVERED MICA · STACKED MICA
CERAMIC · POWER CERAMIC
TRANSMITTING AND SPECIAL R. F. TYPES

APPLICATIONS

RADIO AND TELEVISION EQUIPMENT
ELECTRONIC EQUIPMENT
POWER FACTOR IMPROVEMENT
CAPACITOR MOTORS · FLUORESCENT LIGHTING
PHASE SPLITTING · H.F. AND R.F. HEATING
IGNITION AND INTERFERENCE SUPPRESSION
TELEPHONE INSTALLATIONS

A. H. HUNT (Capacitors) LTD., WANDSWORTH, LONDON, S.W.18. Tel: BATtersea 1083

Factories also in Essex, Surrey and North Wales

Reflectograph

TAPE RECORDERS AND CONTINUOUS PLAYERS FOR INDUSTRY

MODEL 500

THE REFLECTOGRAPH professional tape recorder previously supplied in limited quantities to Broadcasting authorities, Recording Studios and Laboratories, is now being manufactured by Multimusic Ltd.

The Reflectograph Model 500 is self-contained. The portable duo-tone case is finished in luxan hide and pigskin colours and is complete with an output amplifier and two matched loudspeakers.

Model 501 has the same technical specification but is supplied in a metal case for industrial use.

Reflectograph 400 is supplied in three units for incorporation in laboratory equipment. It comprises the Reflectograph deck mounted on a stand, combined record amplifier and playback pre-amplifier and power pack. The units complete with inter-connecting leads have been designed for operation in conjunction with leading makes of high fidelity amplifiers.

Reflectograph Model 550 has the same technical specification as Model 500 with an additional replay amplifier to provide stereophonic reproduction from tape and from records if a suitable pick-up is connected. The fine wood case does not incorporate the loudspeakers.

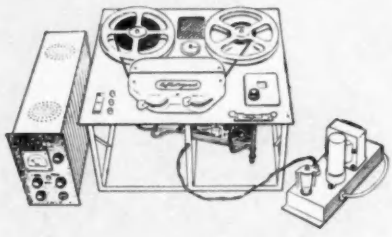

MODEL 400

THE REFLECTOGRAPH IS THE ONLY RECORDER IN THE WORLD POSSESSING ALL THESE FEATURES

- Fitted with 3 heads, separate record and replay amplifiers, enabling instant comparison to be made between signal recorded on tape and the input.
- Variable speed between 8 and 3¾ i.p.s. Stroboscope, lit by neon lamp, shows precise speeds of 7½ and 3¾ i.p.s.
- Easy tape threading into a straight slot. Provision for conversion to stereo. Lever deck controls, providing variable speed wind forward and back from extra fast to inching for editing; sound available for editing if required; instant stop and start.
- Peak level recording meter; Push-button record-playback controls with record safety latch; Clock-type tape position indicator; 3 Garrard motors; 2 matched loudspeakers; Accommodates up to 8½" reels.
- 3 watts undistorted output; overall response strictly to C.C.I.R. recommended specifications; 2 input and 2 output sockets. Fitted with Bib tape splicer on deck, complete with reel of tape, spare reel, 2 screened jack plugs.

Model 400 specification is similar to above, excluding 3 watts output, 2 loudspeakers and 1 output socket. Additional facilities include sockets on chassis for radio and pick-up; socket for microphone on instrument panel, where an additional switch provides instant selection of 3 inputs.



MODEL 81/70/75

CONTINUOUS TAPE REPRODUCERS FOR BACKGROUND MUSIC AND AUTOMATION

TheReflectograph Continuous Players are probably the first British Made heavy duty machines in quantity production, specially designed to play recorded tapes continuously. Tapes are easily threaded and the machine may be started and stopped manually, remotely or by a clock. The tape is played down one track, automatically reverses and continues to play on alternate tracks until switched off.

Model 81/70/75 operates at 3¾ i.p.s. and plays for up to 2 hrs. 8 mins. on each of two tracks. By means of a 20 cycle note, recorded at the end of each track, the machine automatically reverses. A 3 watt amplifier is incorporated but a high level output is available. Start and stop is electrically controlled so that remote or clock operation is available.



MODEL 90 SERIES

An alternative model incorporating a recording head and amplifier is available with a selective amplifier for the recording and reproduction of tones for instrumentation and automation.

Model 90 series, made to special order, provides all the above facilities with reversing by note or light with capacity of up to 12 hours playing time before repeating. These machines are of the standard size for rack mounting and can be supplied to operate at other speeds than 3¾ i.p.s.

For full information please write to:

REFLECTOGRAPH DIVISION, MULTIMUSIC LTD.,
MAYLANDS AVENUE, HEMEL HEMPSTEAD, HERTS.